




# Flooring Collection


Commercial and Residential Flooring

# Pearlazzo PUR


HARDWEARING, NON-DIRECTIONAL VINYL FLOORING FEATURING A POLYURETHANE REINFORCEMENT

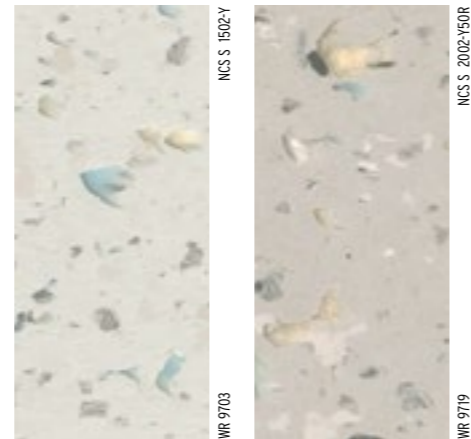


Chalk Burst 9703      Sailcloth 9719

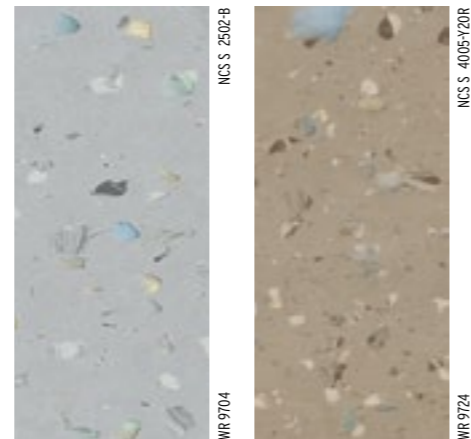


Mineral 9704      Wholemeal 9724

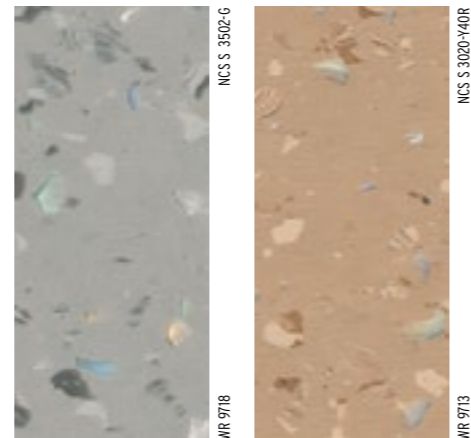


Rain Cloud 9718      Truffle 9713

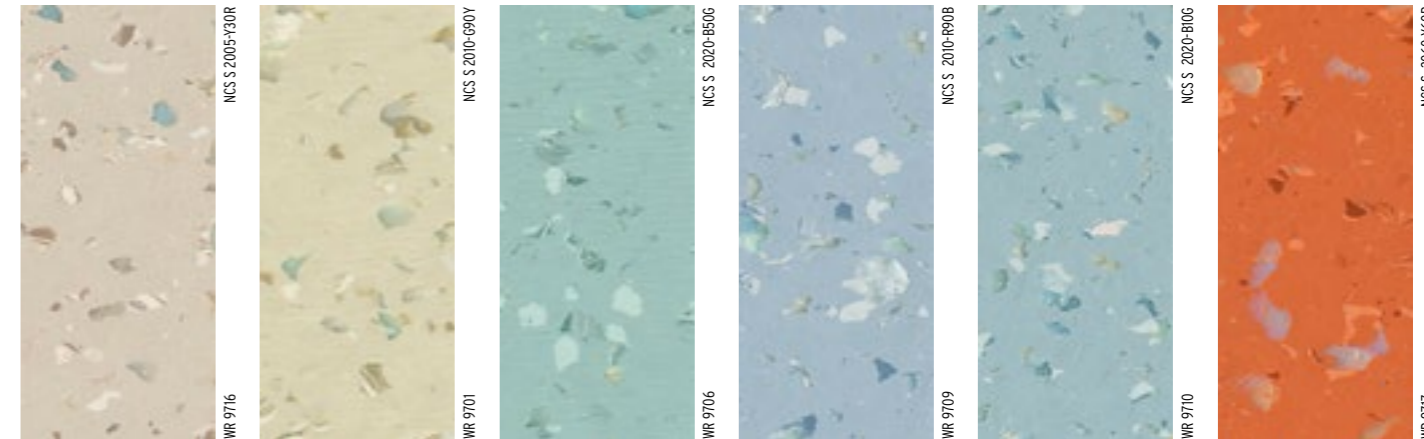

Toasted Almond 9716      Wild Flax 9701      Mint Crisp 9706      Skylight 9709      Seafoam 9710      Autumn Fire 9717

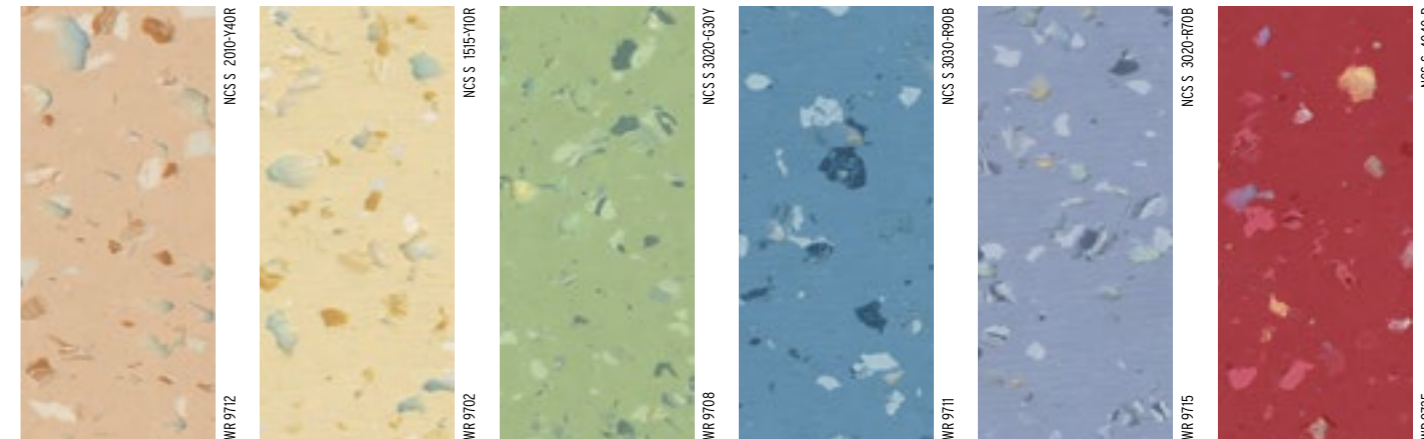


Sandcastle 9712      Lemon Ice 9702      Alpine Meadow 9708      Atlantic Mist 9711      Lilac Bloom 9715      Dark Berry 9725

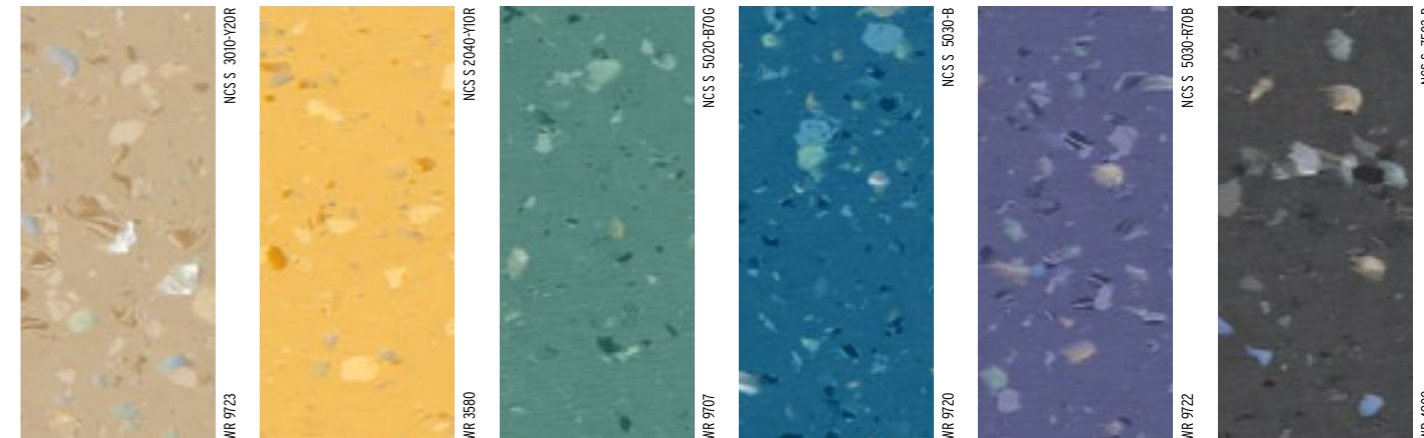

Caramel 9723      Sunrise 9721      Satin Jade 9707      Ocean Ripple 9720      Purple Crush 9722      Charcoal 9705

## KEY FEATURES

- Attractive, high performance, homogeneous floorcovering.
- High quality, cross-linked polyurethane reinforcement, UV cured to provide a low cost, polish-free maintenance regime for the lifetime of the flooring.
- Unique multi-flake decoration.
- Conforms to EN649 / EN ISO 10581.



\* Refer to BRE Global ratings on [www.greenbooklive.com](http://www.greenbooklive.com)

## SPECIFICATIONS

WR = weld rod




GAUGE: 2.0mm  
AVAILABILITY: Sheet: 2m x 20m



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

# Prestige PUR

HARDWEARING, NON-DIRECTIONAL VINYL FLOORING FEATURING A POLYURETHANE REINFORCEMENT

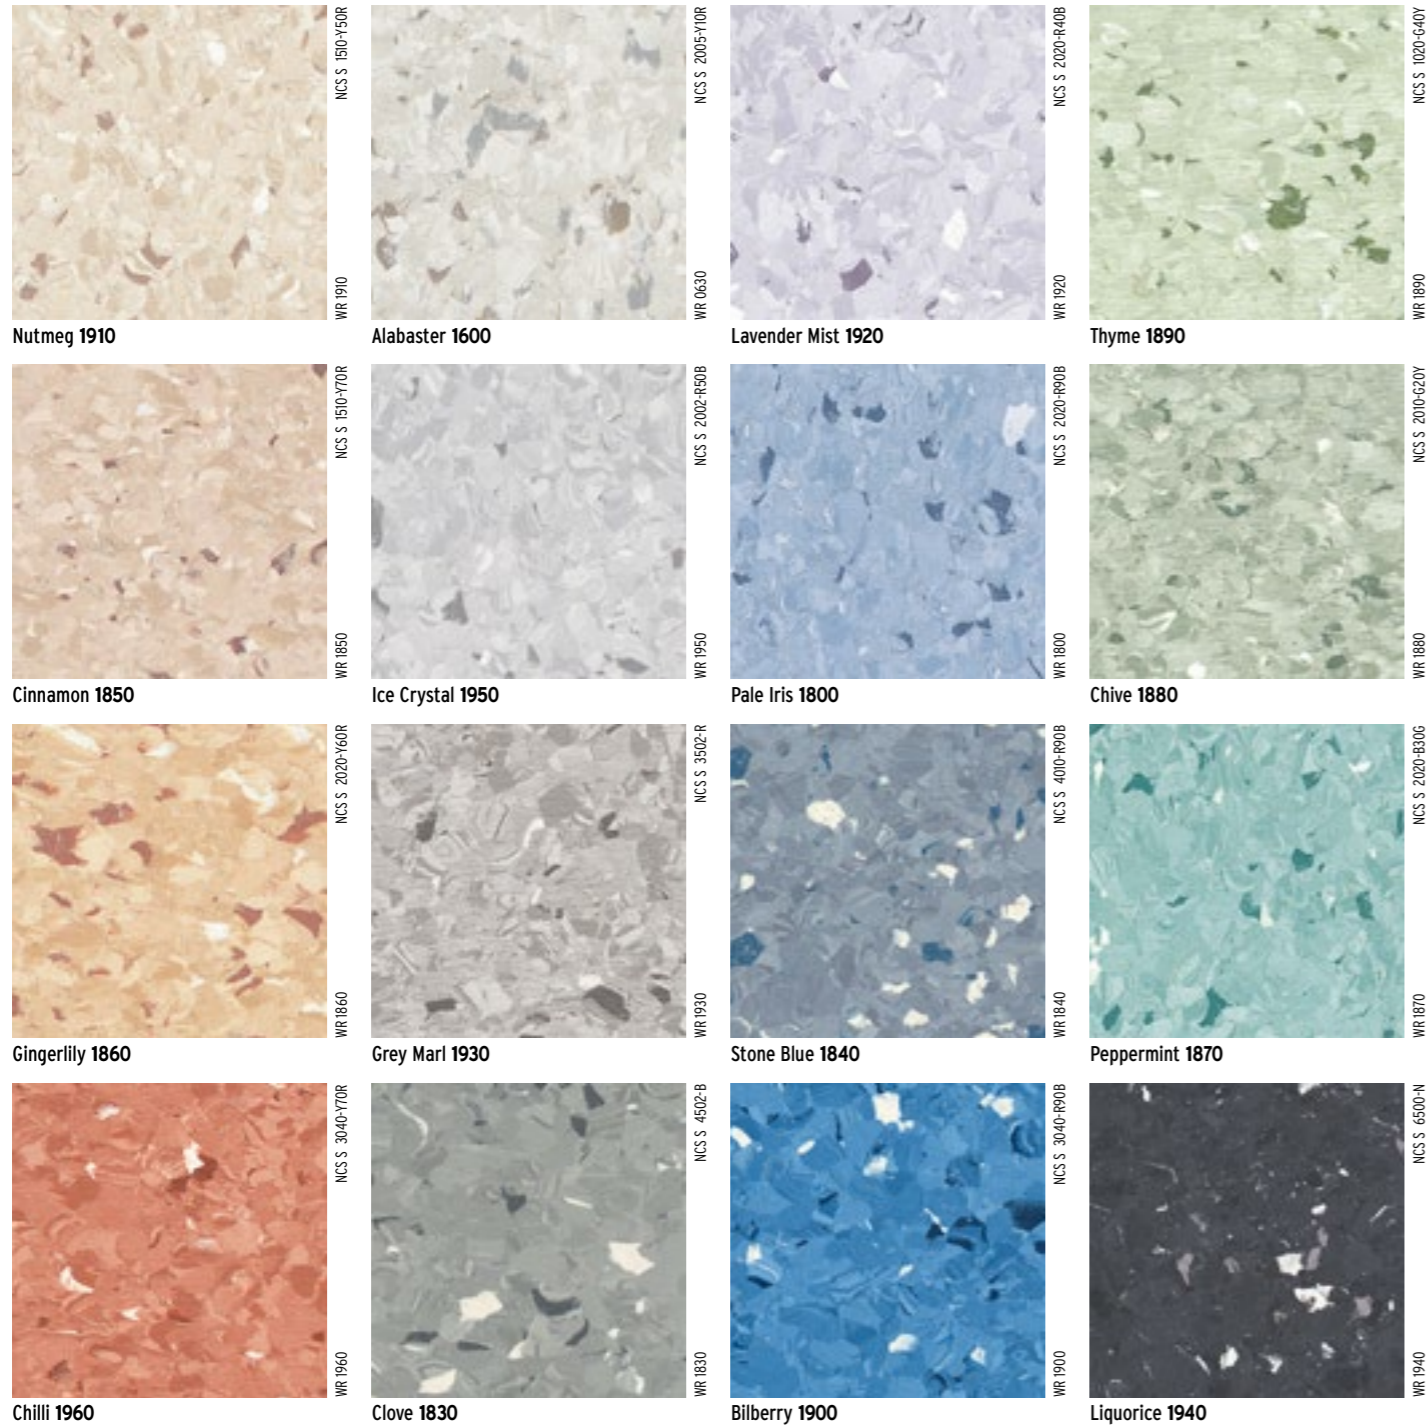


## KEY FEATURES

- Attractive, high-performance, homogeneous floorcovering.
- High quality, cross-linked polyurethane reinforcement, UV cured to provide low cost, polish-free maintenance regime for the lifetime of the flooring.
- Non-directional duotone chip decoration with tonal highlight chips.
- Conforms to EN 649 / EN ISO 10581.

## SPECIFICATIONS




**GAUGE:** 2.0mm  
**AVAILABILITY:** Sheet: 2m x 20m  
**Tile:** 300 x 300mm, 608 x 608mm



\* Refer to BRE Global ratings on [www.greenbooklive.com](http://www.greenbooklive.com)

# Mystique PUR

HARDWEARING, NON-DIRECTIONAL VINYL FLOORING FEATURING A POLYURETHANE REINFORCEMENT

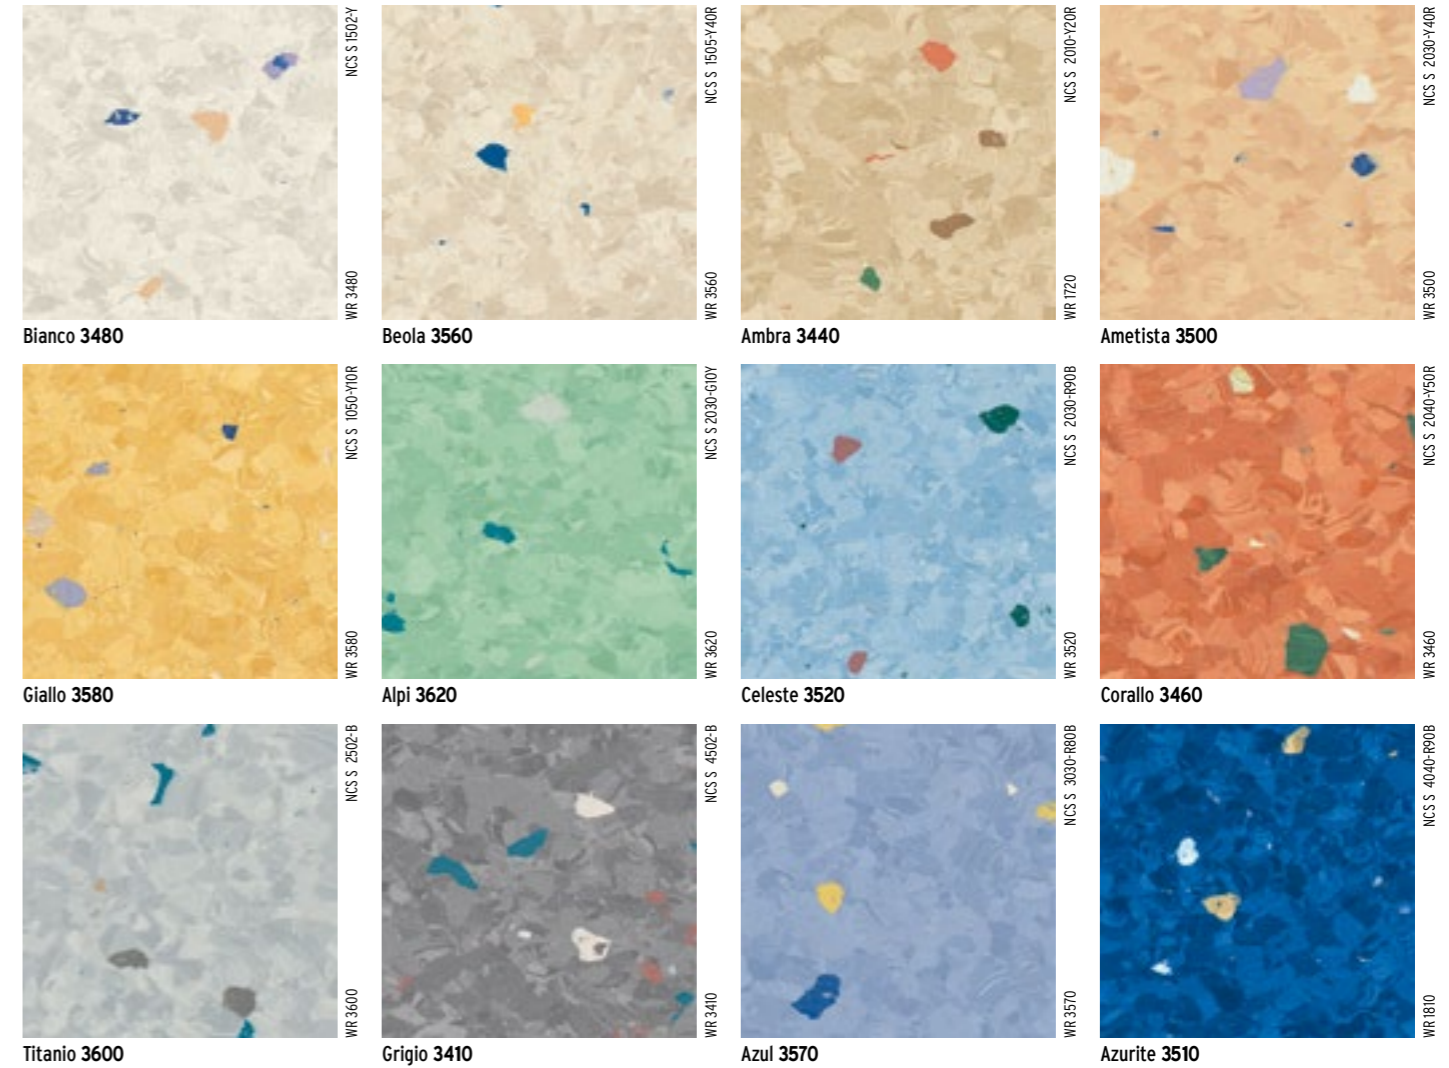


## KEY FEATURES

- Attractive, high-performance, homogeneous floorcovering.
- High quality, cross-linked polyurethane reinforcement, UV cured to provide low cost, polish-free maintenance regime for the lifetime of the flooring.
- Non-directional duotone chip decoration with three non-tonal highlight chips.
- Conforms to EN 649 / EN ISO 10581.

## SPECIFICATIONS



**GAUGE:** 2.0mm  
**AVAILABILITY:** Sheet: 2m x 20m  
**Tile:** 300 x 300mm, 608 x 608mm




Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

It is recommended that a larger sample piece is viewed to appreciate the decoration.


# Classic Mystique PUR

HARDWEARING, NON-DIRECTIONAL VINYL FLOORING FEATURING A POLYURETHANE REINFORCEMENT

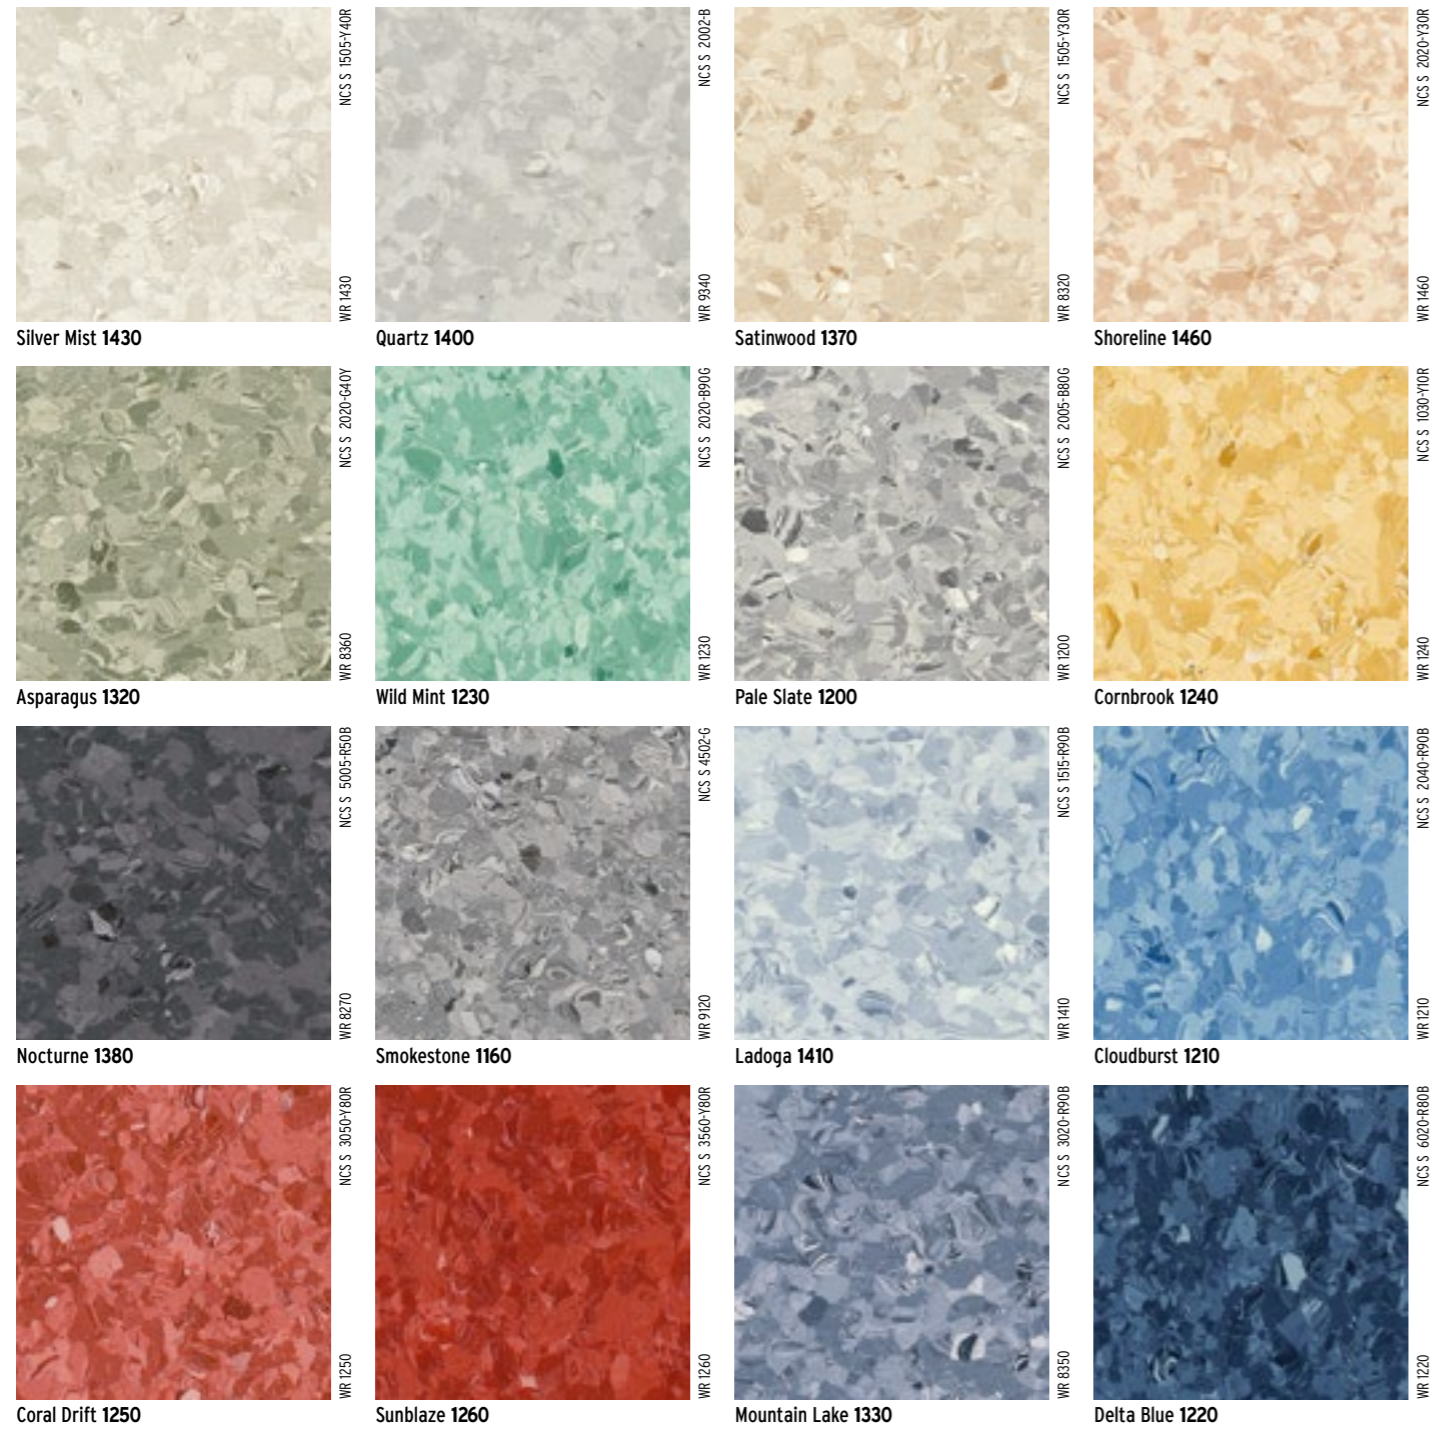

## KEY FEATURES

- Attractive, high-performance, homogeneous floorcovering.
- High quality, cross-linked polyurethane reinforcement, UV cured to provide low cost, polish-free maintenance regime for the lifetime of the flooring.
- Non-directional duotone chip decoration with marbled tonal highlight chips.
- Conforms to EN 649 / EN ISO 10581.



\* Refer to BRE Global ratings on [www.greenbooklive.com](http://www.greenbooklive.com)


## SPECIFICATIONS



**GAUGE:** 2.0mm  
**AVAILABILITY:** Sheet: 2m x 20m  
**Tile:** 300 x 300mm, 608 x 608mm


# 2000 PUR

HEAVY-DUTY VINYL FLOORING FEATURING A MARBLEISED DECORATION AND POLYURETHANE REINFORCEMENT

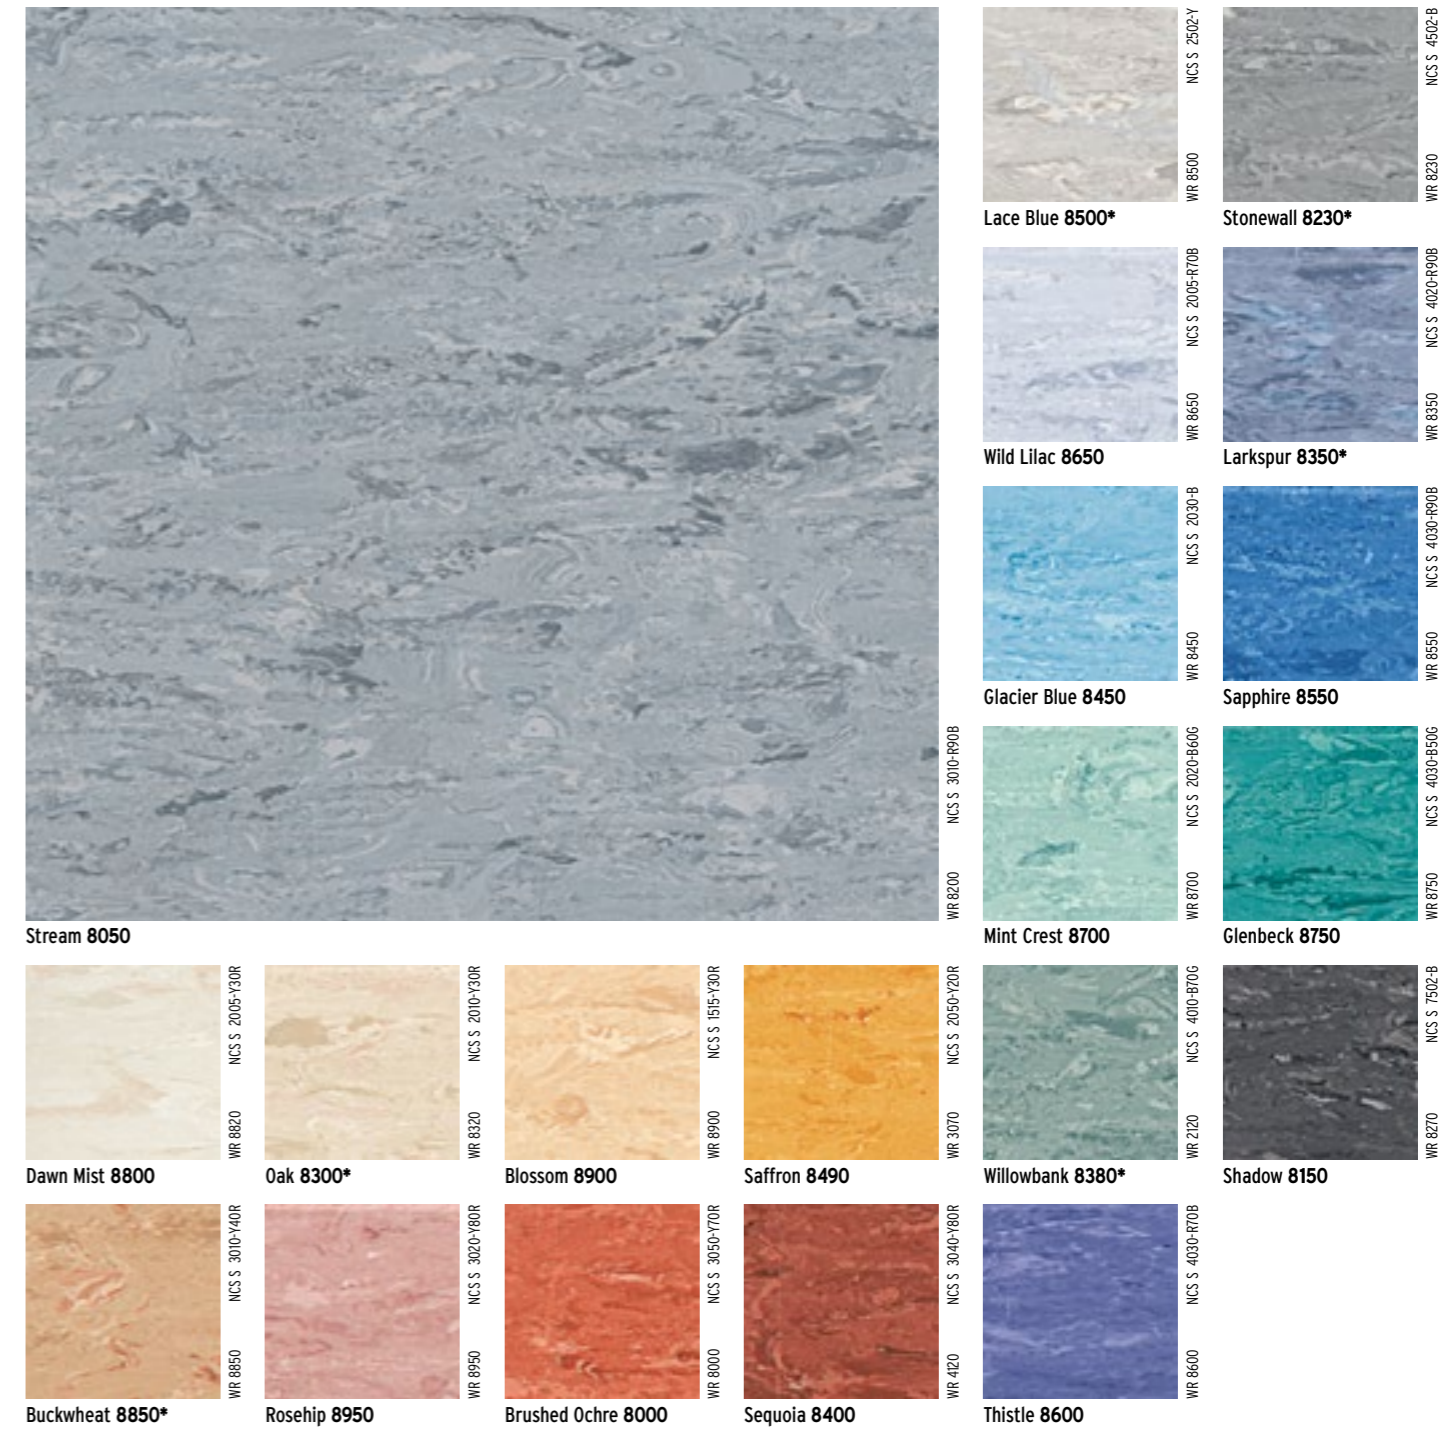

## KEY FEATURES

- Hardwearing, homogeneous commercial floorcovering.
- High quality, cross-linked polyurethane reinforcement, UV cured to provide low cost, polish-free maintenance regime for the lifetime of the flooring.
- Directional duotone marbled decoration with marbled highlight tones.
- Conforms to EN 649 / EN ISO 10581.



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

## SPECIFICATIONS



**GAUGE:** 2.0mm, 2.5mm  
**AVAILABILITY:** Sheet: 2m x 20m (2.0mm)  
 2m x 15m (2.5mm)  
**Tile:** 300 x 300mm (2.0mm, 2.5mm)  
 608 x 608mm (2.0mm)



All colours are available ex-stock in 2.0mm.  
 \* 6 colours are available ex-stock in 2.5mm.

# XL PU


HEAVY-DUTY VINYL FLOORING FEATURING A MARBLEISED DECORATION AND POLYURETHANE SURFACE TREATMENT



Turquoise 3810\*

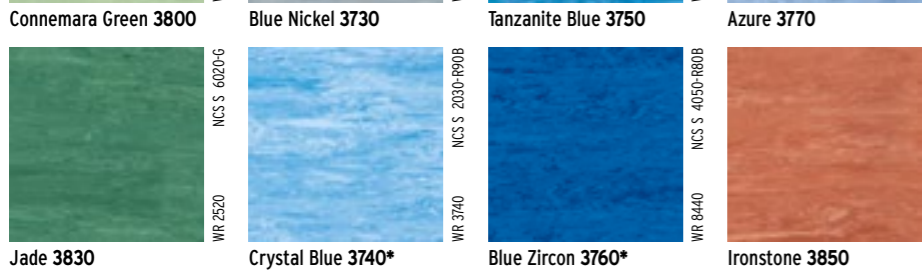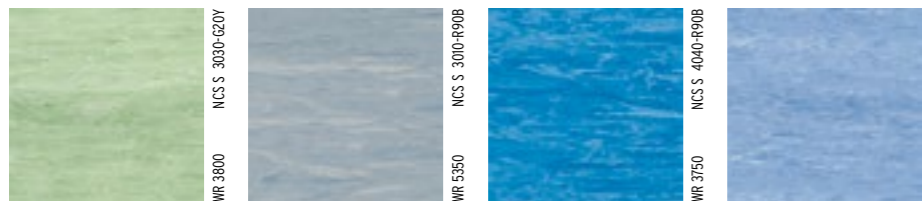

Carnelian Beige 3890      Rose Quartz 3870\*

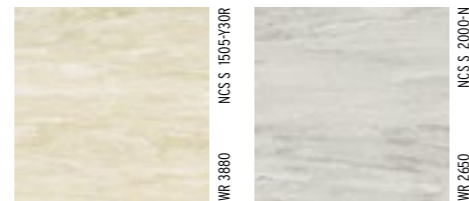

Porcelain 3880      Pumice 3700\*



Citrine 3930      Fossil 3710\*



Dolomite 3910\*      Flint 3720\*




Sablee Beige 3900\*

All colours are available ex-stock in 2.0mm.  
\* 9 colours are available ex-stock in 1.5mm.

## KEY FEATURES

- Hardwearing, homogeneous commercial floorcovering.
- Polyurethane surface treatment provides an excellent foundation for an ongoing cleaning regime, leading to maintenance cost savings.
- Directional duotone marbled decoration.
- Conforms to EN 649 / EN ISO 10581.

## SPECIFICATIONS



GAUGE: 1.5mm, 2.0mm  
 AVAILABILITY: Sheet: 2m x 27.5m (1.5mm)  
 2m x 20m (2.0mm)  
 Tile: 300 x 300mm (2.0mm)  
 608 x 608mm (2.0mm)




100% RECYCLABLE  
25% RECYCLED MATERIAL

\* Refer to BRE Global ratings on www.greenbooklive.com

# Standard XL

HEAVY-DUTY VINYL FLOORING WITH A MARBLEISED DECORATION

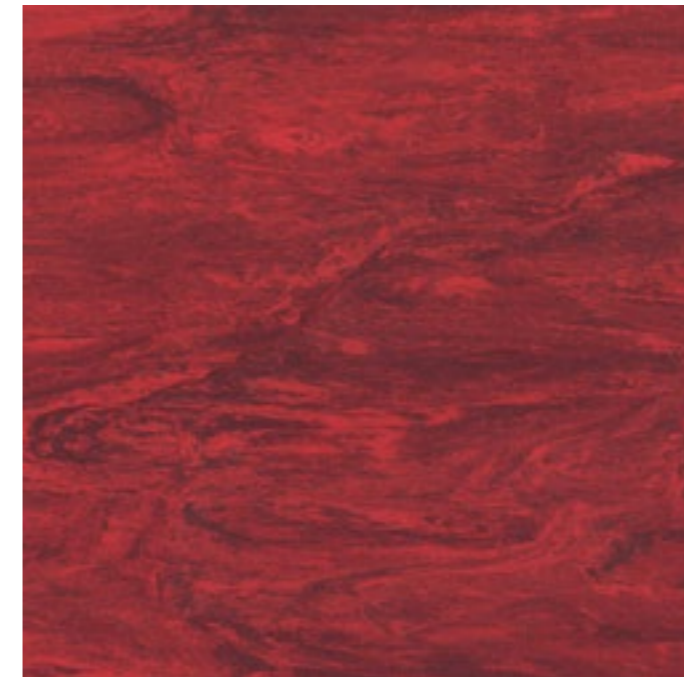


Black Cherry 8580



Atlantic Blue 9170




Black Panther 8640

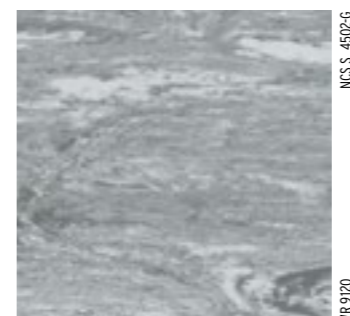

Graphite 9120\*



Slate Grey 9200\*✓




Mushroom 9110\*✓

All colours are available ex-stock in 2.0mm.  
\* 4 colours are available ex-stock in 1.5mm.  
✓ 2 colours are available ex-stock in 2.5 and 3.0mm.

## KEY FEATURES

- Hardwearing, homogeneous commercial floorcovering, in a choice of gauges.
- Directional duotone marbled decoration.
- Conforms to EN 649 / EN ISO 10581.

## SPECIFICATIONS



GAUGE: 1.5mm, 2.0mm, 2.5mm, 3.0mm  
 AVAILABILITY: Sheet: 2m x 27.5m (1.5mm)  
 2m x 20m (2.0mm), 2m x 15m (2.5mm), 2m x 13m (3.0mm)  
 Tile: 300 x 300mm (2.0mm, 2.5mm 3.0mm)  
 608 x 608mm (2.0mm)



100% RECYCLABLE  
25% RECYCLED MATERIAL
















Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

# Polyflex Plus PU






ECONOMICAL, GENERAL-PURPOSE VINYL TILE FEATURING A POLYURETHANE SURFACE TREATMENT



## Duotone Marbling

 Brecon Beige 7040* NCS S 4010-Y10R	 Cornish Cream 7370* NCS S 2020-Y20R	 Durham Fawn 7400* NCS S 2010-Y40R
 Arran Beige 7420 NCS S 1505-Y30R	 Pennine Fawn 7030 NCS S 3005-Y50R	 Jersey Tan 7410* NCS S 3020-Y40R
 Dover Grey 7330* NCS S 2002-G60Y	 Border Grey 7110 NCS S 2502-Y	 Lomond Grey 7320 NCS S 4010-B10G
 Romney Green 7340 NCS S 2010-B70G	 Mendip Mauve 7360 NCS S 2020-R40B	 Firth Grey 7060* NCS S 5000-N
 Cotswold Green 7010* NCS S 4010-G30Y	 Anglian Red 7380* NCS S 3040-R	 Lakeland Blue 7350* NCS S 3040-R90B

## Traditional Marbling

 Pearl Grey 6130 NCS S 3502-B	 Walnut 6180* NCS S 7010-Y50R
 Snowdrop 6010 NCS S 1002-Y50R	 Magnolia 6060* NCS S 3020-Y10R
 Dark Brown 6300 NCS S 8005-Y80R	 Black Tulip 6040 NCS S 8502-R

All colours are available ex-stock in 2.0mm.  
\* 12 colours are available ex-stock in 1.5mm and 2.5mm.

## KEY FEATURES


- General-purpose, homogeneous vinyl tile.
- Polyurethane surface treatment provides an excellent foundation for an ongoing cleaning regime, leading to maintenance cost savings.
- Conforms to EN 649 / EN ISO 10581.
- Available in traditional or duotone marbling.
- Traditional marbling colours include a secondary complementary colour.

**100% RECYCLABLE**  
**25% RECYCLED MATERIAL**



† Refer to BRE Global ratings on [www.thegreenguide.org.uk](http://www.thegreenguide.org.uk)

## SPECIFICATIONS


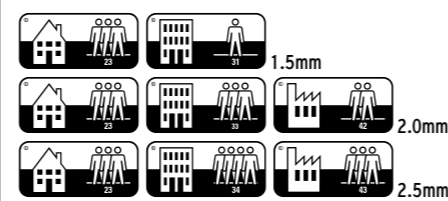












GAUGE: 1.5mm, 2.0mm, 2.5mm  
AVAILABILITY: Tile: 300 x 300mm

# Polysafe Corona PUR

HEAVY-DUTY SAFETY FLOORING WITH A MULTI-CHIP DECORATION



 Drystone 5470 WR 4930	 Seal 5570 WR 5570	 Grasshopper 5540 WR 5540	 Pacific 5550 WR 5550
 Barley 5500 WR 5500	 Otter 5530 WR 5530	 Geyser 5580 WR 5580	 Bluebell 5510 WR 5510
 Mango 5480 WR 5480	 Tulip 5520 WR 5520	 Blackbird 5560 WR 5560	 Seawater 5490 WR 5490

## KEY FEATURES

- Features Polysafe™ PUR for optimum appearance retention and life cycle maintenance cost savings of up to 60%.
- Incorporates quartz, aluminium oxide, silicon carbide particles and recycled natural aggregates, to improve traction and safety underfoot.
- Slip resistance is assured for the guaranteed life of the product.
- ≥36 (Pendulum wet test - 4S Rubber/Slider 96).
- Conforms to EN 13845 50,000 cycles abrasion test.

**100% RECYCLABLE**  
**CONTAINS RECYCLED MATERIAL**




## SPECIFICATIONS




GAUGE: 2.0mm  
AVAILABILITY: Sheet: 2m x 20m

# Polysafe Astral PUR


HEAVY-DUTY SAFETY FLOORING WITH MULTI-FLAKE DECORATION

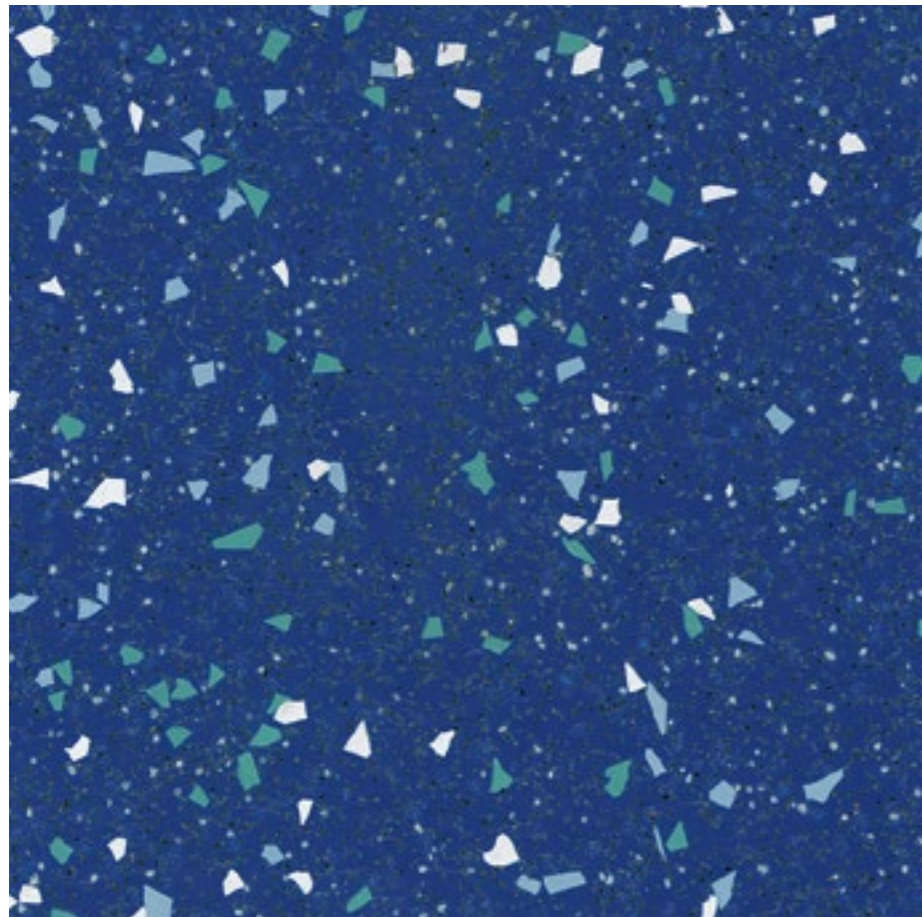


Nebula Blue 4200




Arkose 4190\*




Space Mauve 4230




Red Sky 4310




Lunar Grey 4240




North Star 4370




Isis 4380




Starburst 4300




Greenstone 4440\*




Feldspar 4620\*



Aquarius 4220



Calcite Blue 4460\*



Deep Sapphire 4050\*

\* Previously available as Polysafe Strata colours

## KEY FEATURES

Features Polysafe™ PUR for optimum appearance retention and life cycle maintenance cost savings of up to 60%.

Incorporates quartz, aluminium oxide, silicon carbide particles and recycled natural aggregates, to improve traction and safety underfoot.

Slip resistance is assured for the guaranteed life of the product.

≥36 (Pendulum wet test - 4S Rubber/Slider 96).

Conforms to EN 13845 50,000 cycles abrasion test.



\* Refer to BRE Global ratings on www.greenbooklive.com



## SPECIFICATIONS




GAUGE: 2.0mm


AVAILABILITY: Sheet: 2m x 20m

# Polysafe Mosaic PUR

HEAVY-DUTY SAFETY FLOORING WITH HIGH DENSITY FLAKE DECORATION AND PEARLESCENT

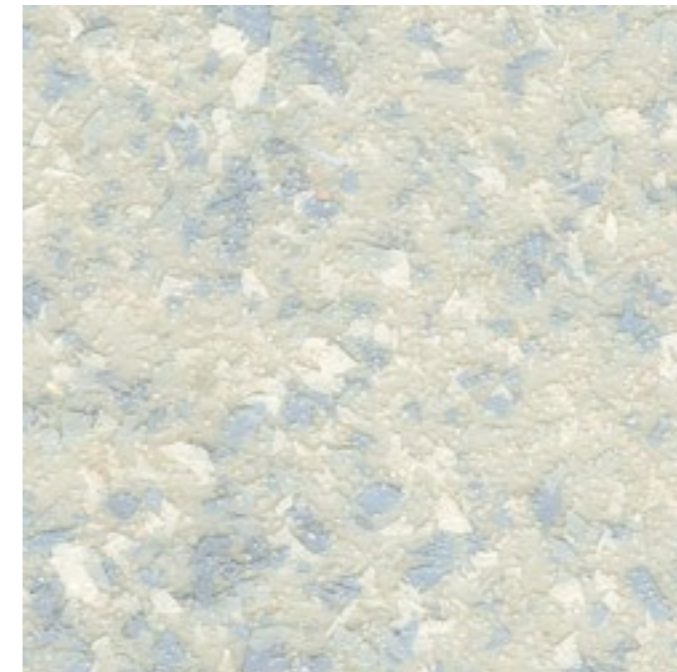

Pearlite 4115

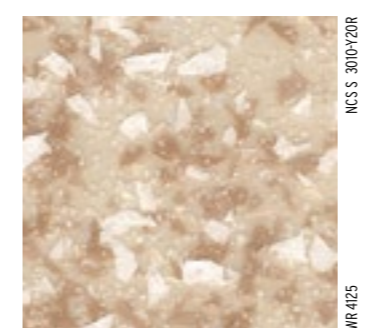


Akoya 4125




Orient Grey 4135



Grey Fusion 4105



Sunstone 4185

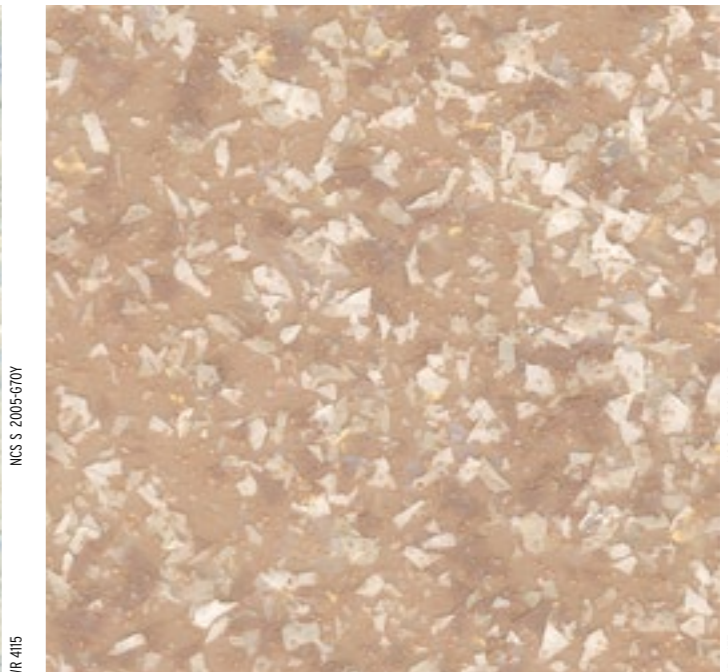


Earthstone 4155



Green Opal 4195



Freshwater 4145

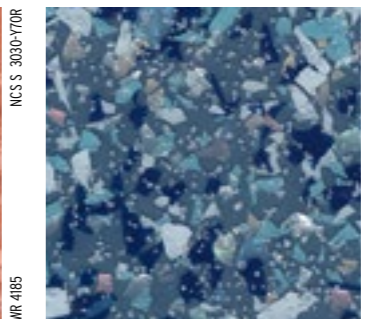

South Sea 4175



Graphite Pearl 4165

## KEY FEATURES


Features Polysafe™ PUR for optimum appearance retention and life cycle maintenance cost savings of up to 60%.

Incorporates aluminium oxide and coloured quartz particles to improve traction and safety underfoot.

Slip resistance is assured for the guaranteed life of the product.

≥36 (Pendulum wet test - 4S Rubber/Slider 96).

Conforms to EN 13845 50,000 cycles abrasion test.



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.



## SPECIFICATIONS




GAUGE: 2.0mm, wear layer 0.7mm

AVAILABILITY: Sheet: 2m x 20m

It is recommended that a larger piece is viewed at floor level to appreciate the decoration

# Polysafe Modena PUR

HEAVY-DUTY SAFETY FLOORING FEATURING CLEAR MICRO-GRANITE DESIGNS

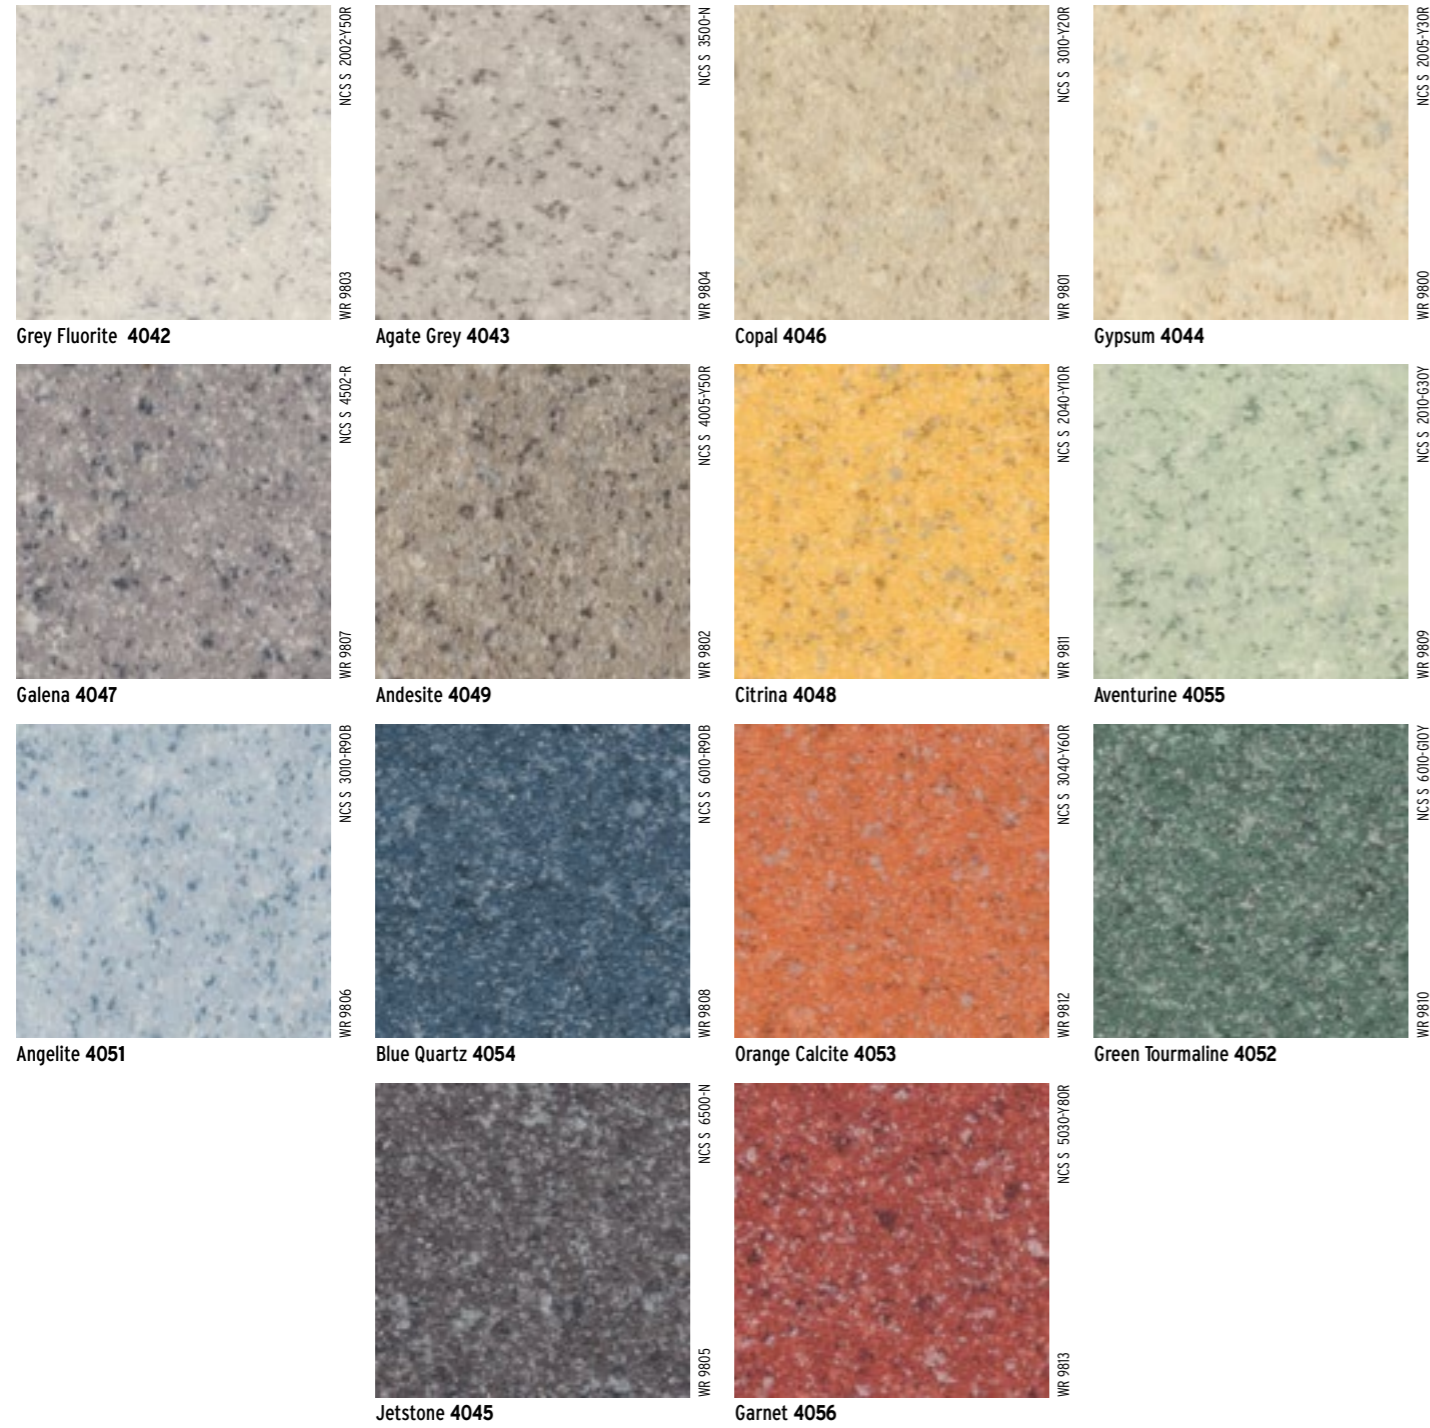

## KEY FEATURES

Features Polysafe™ PUR for optimum appearance retention and life cycle maintenance cost savings of up to 60%.


Hardwearing safety flooring featuring high clarity micro granite designs.

Incorporates aluminium oxide particles to improve traction and safety underfoot.

Slip resistance is assured for the guaranteed life of the product.

≥36 (Pendulum wet test - 4S Rubber/Slider 96).

Conforms to EN 13845 50,000 cycles abrasion test.



† Refer to BRE Global ratings on [www.thegreenguide.org.uk](http://www.thegreenguide.org.uk)



## SPECIFICATIONS




**GAUGE:** 2.0mm, wear layer 0.7mm

**AVAILABILITY:** Sheet: 2m x 20m

# Polysafe Arena PUR

HEAVY-DUTY SAFETY FLOORING FEATURING ABSTRACT, MATERIAL AND STONE DESIGNS

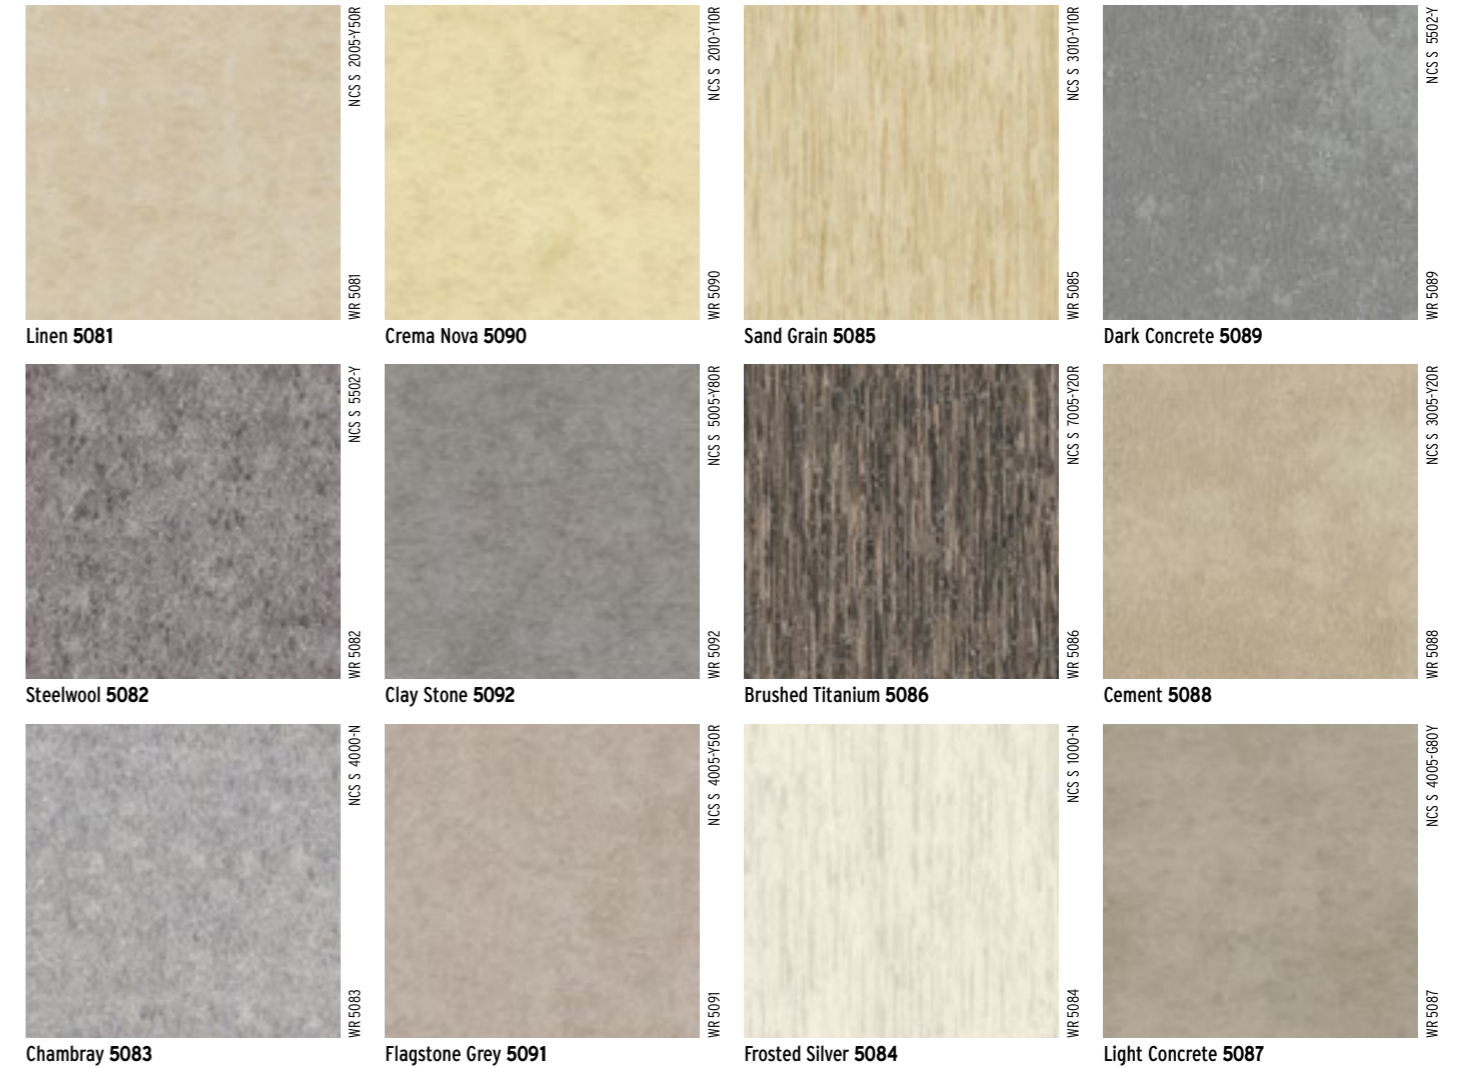

## KEY FEATURES

Features Polysafe™ PUR for optimum appearance retention and life cycle maintenance cost savings of up to 60%.


Hardwearing safety flooring featuring high clarity abstract, stone and material effects.

Incorporates aluminium oxide particles to improve traction and safety underfoot.

Slip resistance is assured for the guaranteed life of the product.

≥36 (Pendulum wet test - 4S Rubber/Slider 96).

Conforms to EN 13845 50,000 cycles abrasion test.



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.



## SPECIFICATIONS





**GAUGE:** 2.0mm, wear layer 0.7mm

**AVAILABILITY:** Sheet: 2m x 20m



# Polysafe Verona PUR

DECORATIVE HEAVY-DUTY SAFETY FLOORING WITH COMPLEMENTARY CHIP AND CARBORUNDUM-FREE DESIGN

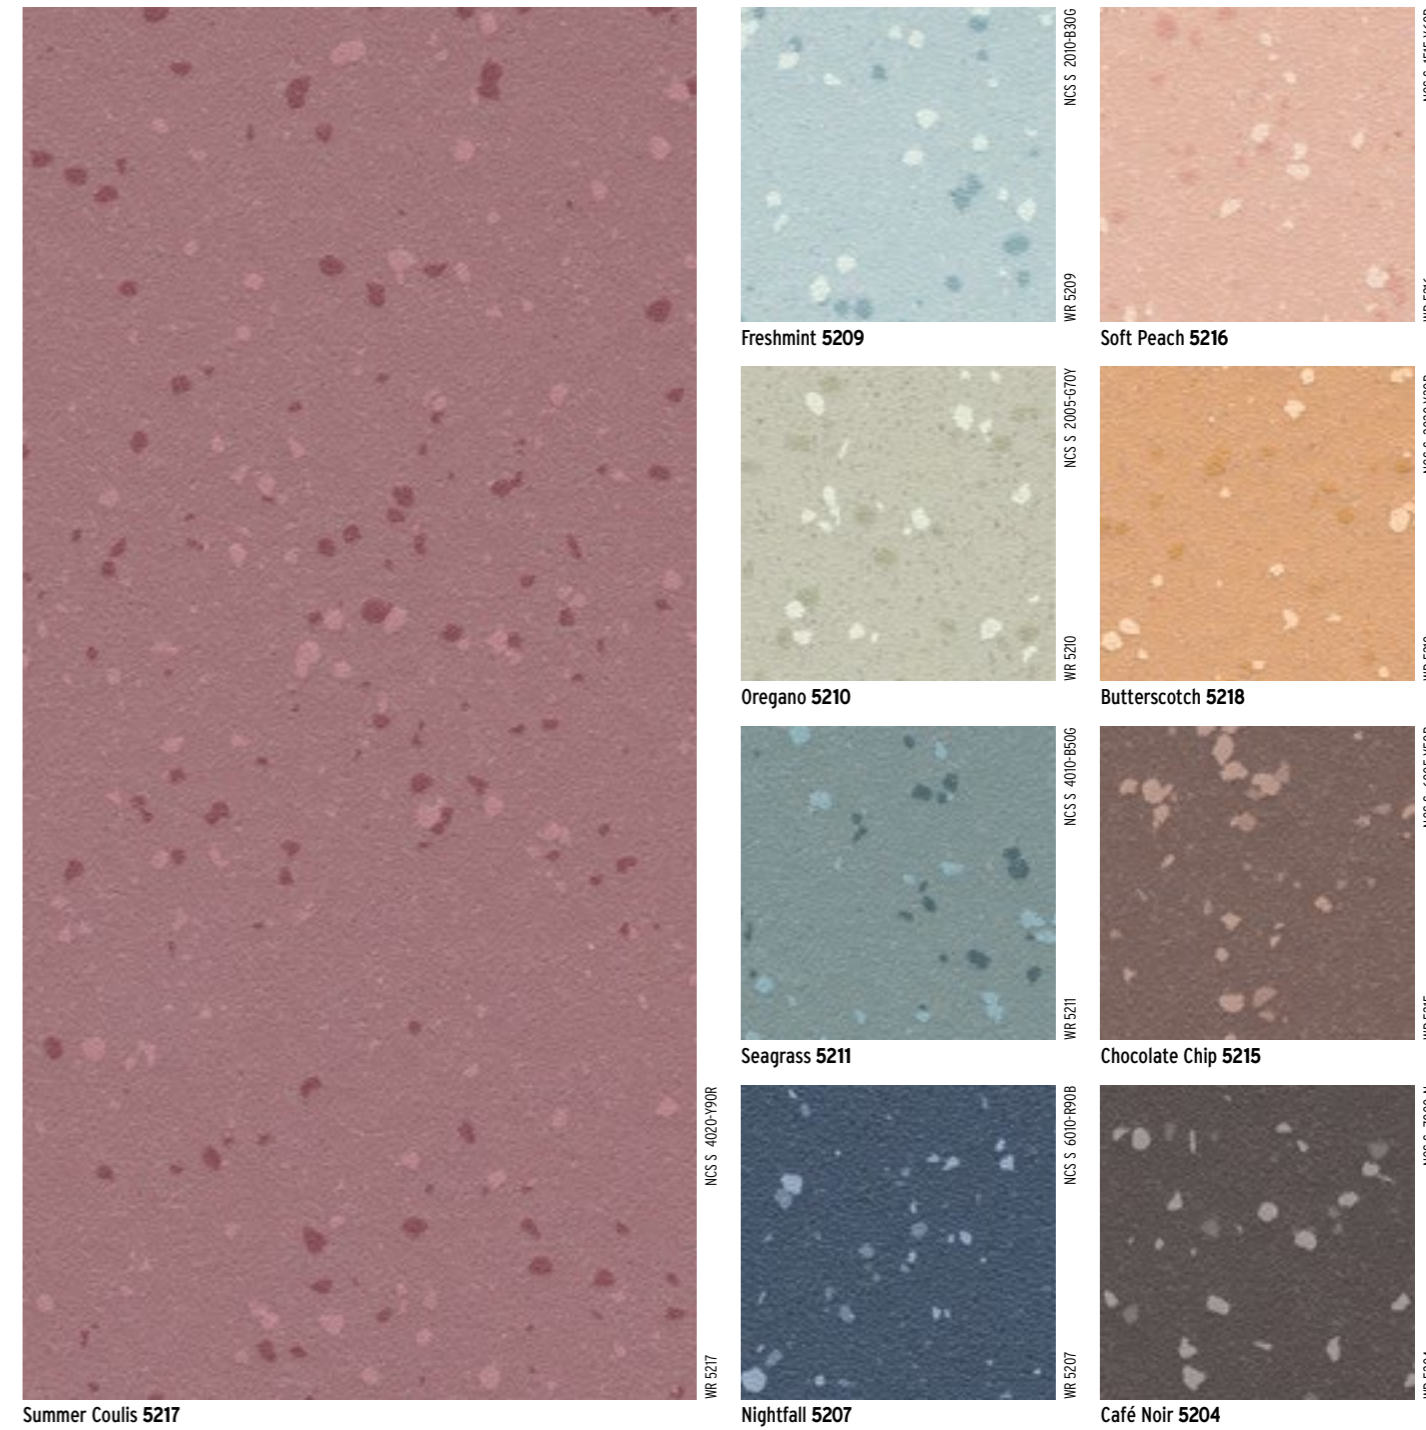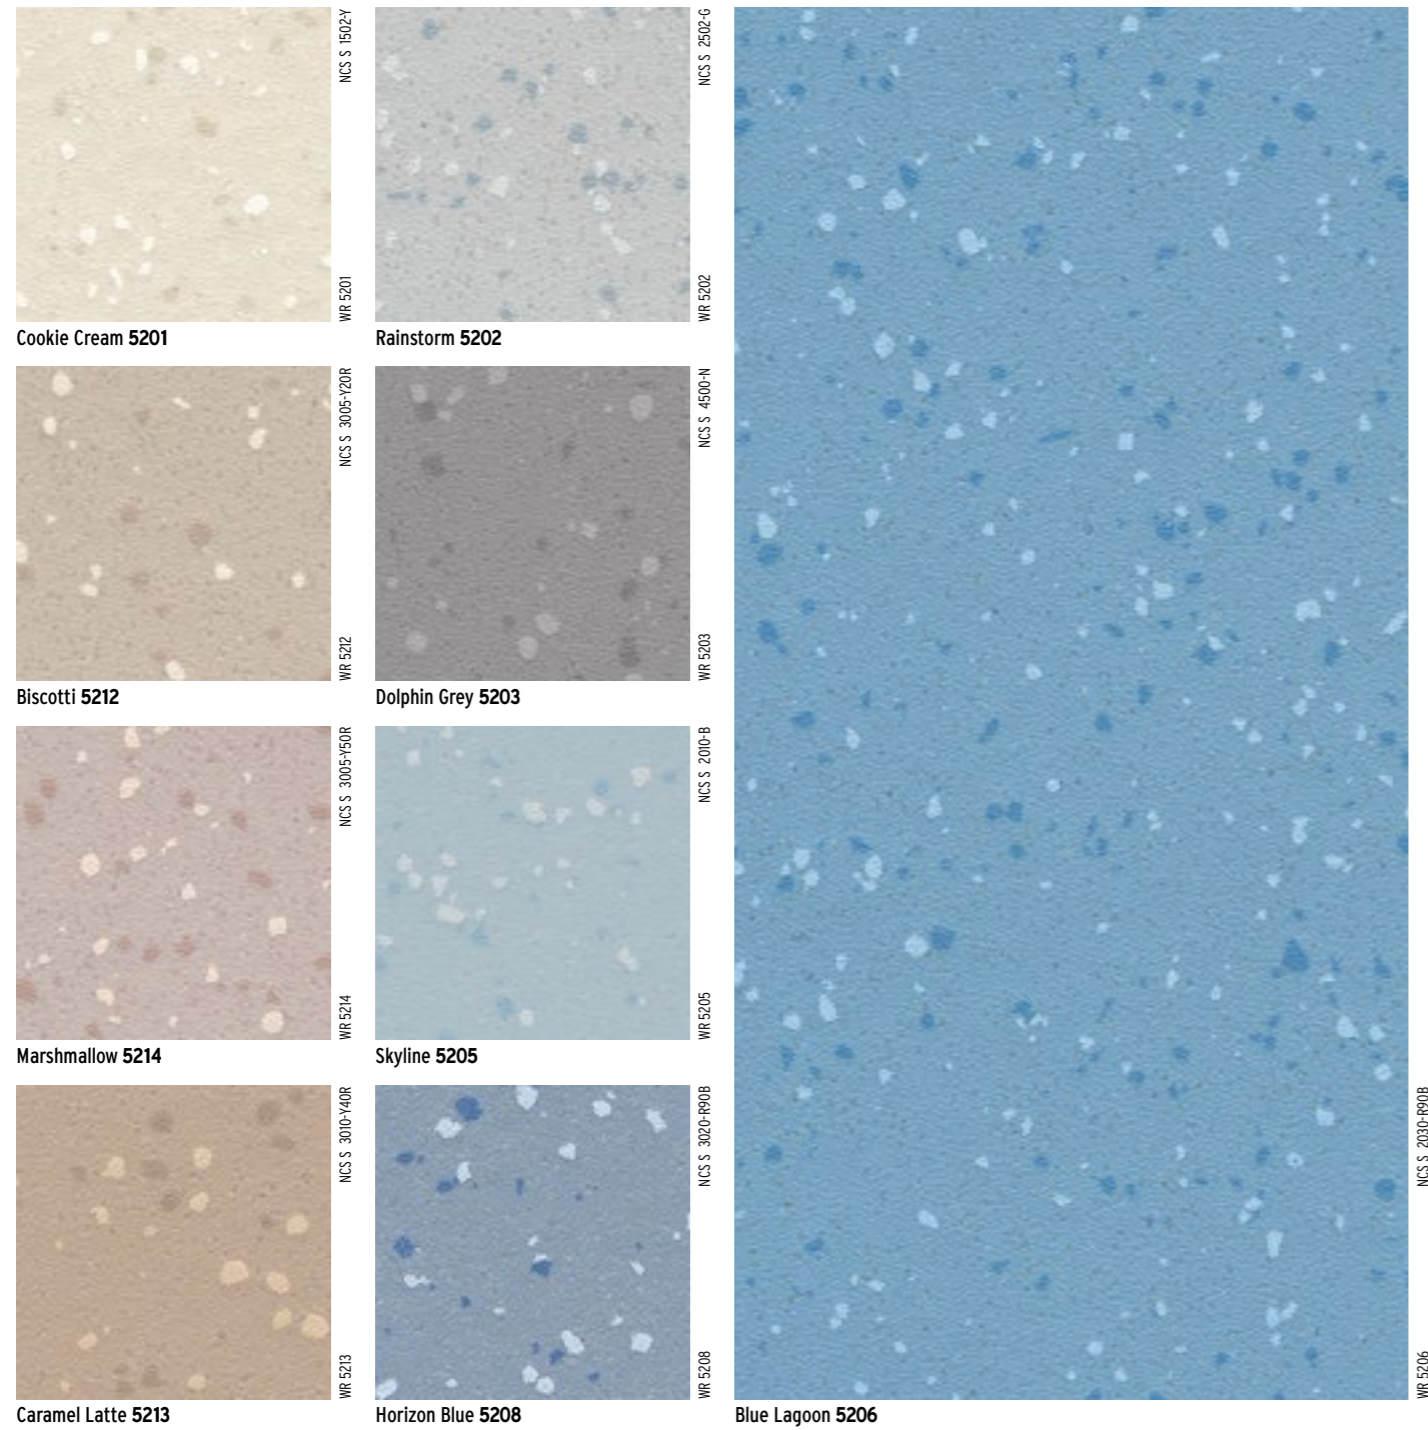

## KEY FEATURES

- Carborundum-free safety flooring with high decorative appeal.
- 18 subtle pastel shades complemented by bold statement colours.
- Features complementary coloured quartz particles and natural recycled aggregates to enable a high clarity appearance.
- Slip resistance is assured for the guaranteed life of the product  $\geq 36$  (Pendulum wet test).
- Conforms to EN 13845 50,000 cycles abrasion test.



† Refer to BRE Global ratings on [www.thegreenguide.org.uk](http://www.thegreenguide.org.uk)

## SPECIFICATIONS



GAUGE: 2.0mm  
AVAILABILITY: Sheet: 2m x 20m



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.


# NEW Polysafe Wood fx PUR

HEAVY-DUTY SAFETY FLOORING FEATURING SOPHISTICATED WOOD DESIGNS



## KEY FEATURES

Features Polysafe™ PUR for optimum appearance retention and life cycle maintenance cost savings of up to 60%.  
 Hardwearing safety floorcovering featuring authentic and contemporary wood designs. Incorporates aluminium oxide particles to improve traction and safety underfoot.  
 Slip resistance is assured for the guaranteed life of the product.  
 ≥36 (Pendulum wet test - 4S Rubber/Slider 96).  
 Conforms to EN 13845 50,000 cycles abrasion test.



Refer to BRE Global ratings on www.greenbooklive.com



## SPECIFICATIONS




**GAUGE:** 2.0mm, wear layer 0.7mm  
**AVAILABILITY:** Sheet: 2m x 20m

This product is a highly realistic replication of natural materials. Hence, on many designs, features such as knots will be present, as well as natural colour variation.

# Polysafe Vogue Ultra PUR

HEAVY-DUTY, DECORATIVE SAFETY FLOORING WITH MULTI-CHIP DESIGNS

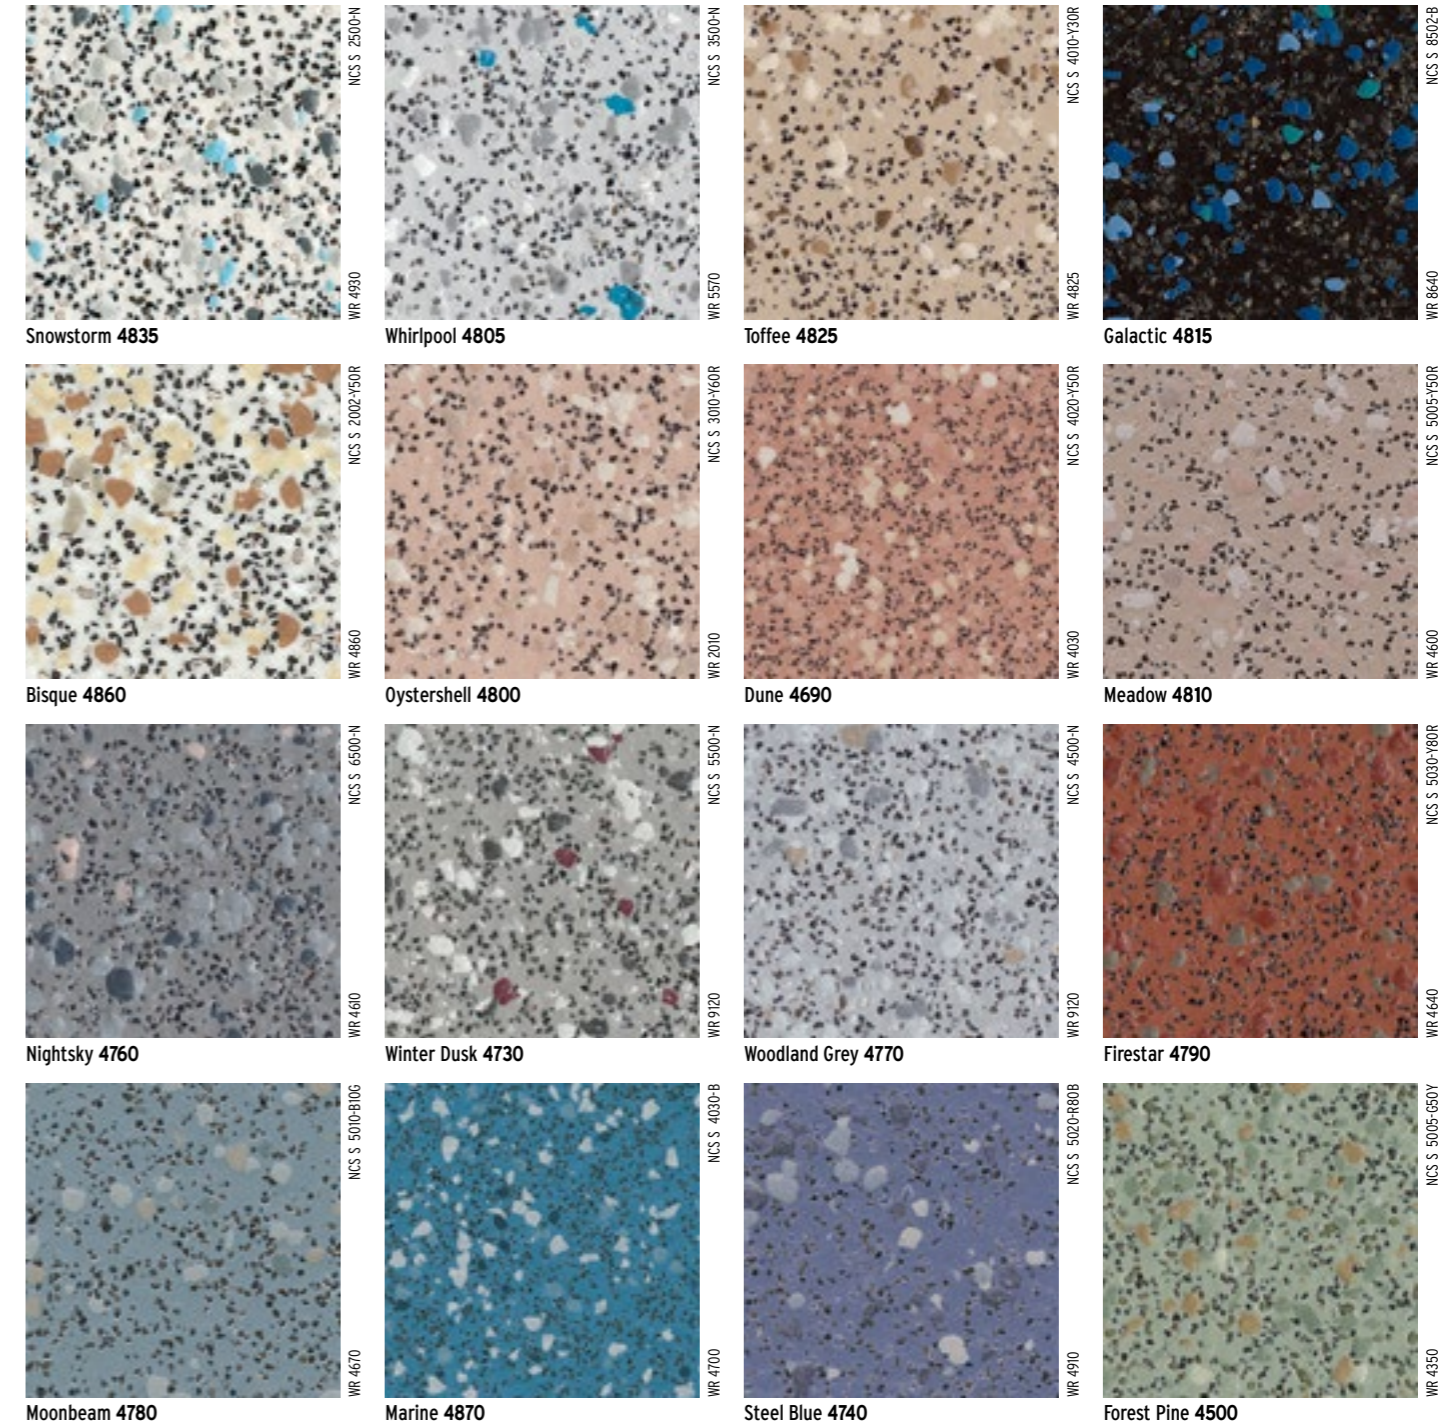

## KEY FEATURES

Features Polysafe™ PUR for optimum appearance retention and life cycle maintenance cost savings of up to 60%.  
 Incorporates quartz, aluminium oxide, silicon carbide particles and recycled natural aggregates, to improve traction and safety underfoot.  
 Slip resistance is assured for the guaranteed life of the product.  
 ≥36 (Pendulum wet test - 4S Rubber/Slider 96).  
 Conforms to EN 13845 50,000 cycles abrasion test.



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.




## SPECIFICATIONS



**GAUGE:** 2.0mm  
**AVAILABILITY:** Sheet: 2m x 20m

# Polysafe Standard PUR

HEAVY-DUTY SAFETY FLOORING WITH A TRADITIONAL DECORATION

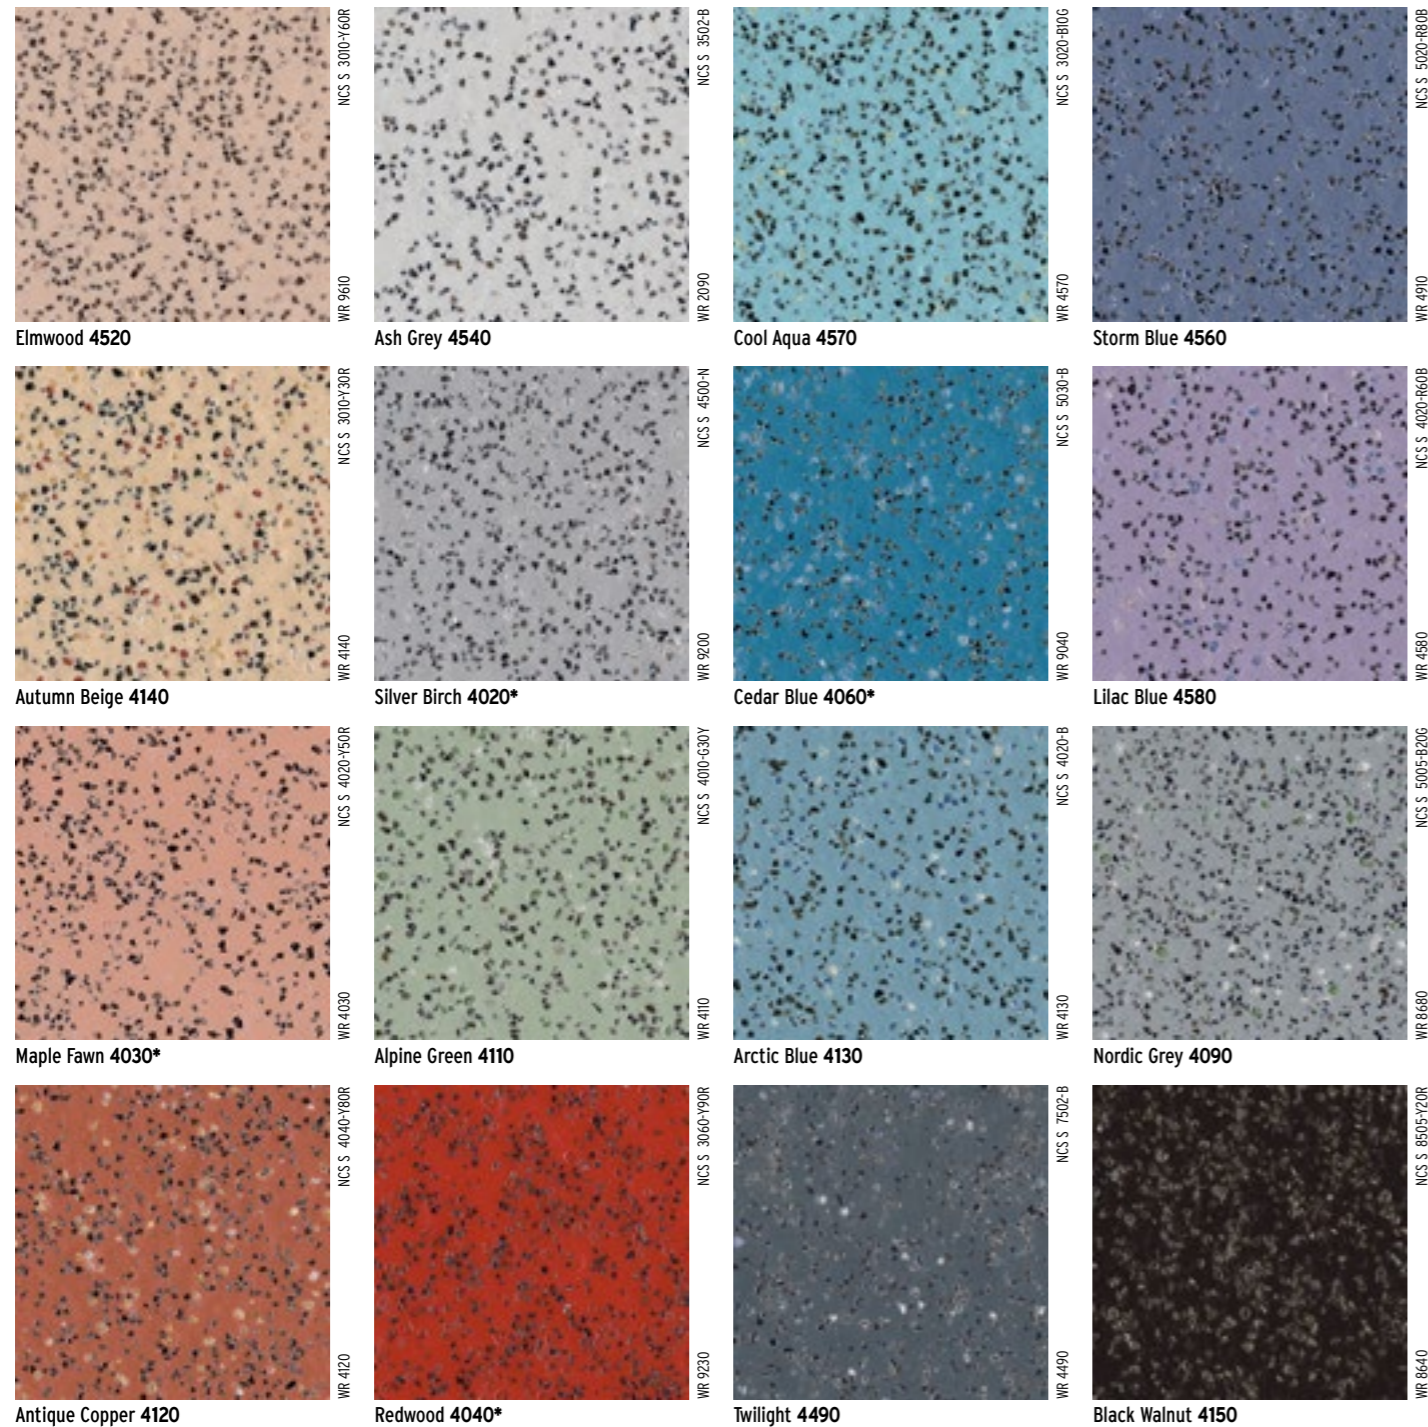

## KEY FEATURES

Features Polysafe™ PUR for optimum appearance retention and life cycle maintenance cost savings of up to 60%.

Incorporates quartz, aluminium oxide, silicon carbide particles and recycled natural aggregates, to improve traction and safety underfoot.

Slip resistance is assured for the guaranteed life of the product.

≥36 (Pendulum wet test - 4S Rubber/Slider 96).

Conforms to EN 13845 50,000 cycles abrasion test.



\* Refer to BRE Global ratings on [www.greenbooklive.com](http://www.greenbooklive.com)



## SPECIFICATIONS



GAUGE: 2.0mm, 2.5mm, 3.5mm\*


AVAILABILITY: Sheet: 2m x 20m

2m x 15m (3.5mm)

\* 4 colours are available ex-stock in 3.5mm.

# Polysafe Ultima

SAFETY FLOORING WITH A MULTI-CHIP DECORATION, DESIGNED FOR HEAVY USE AREAS WHICH REQUIRE ENHANCED SLIP RESISTANCE

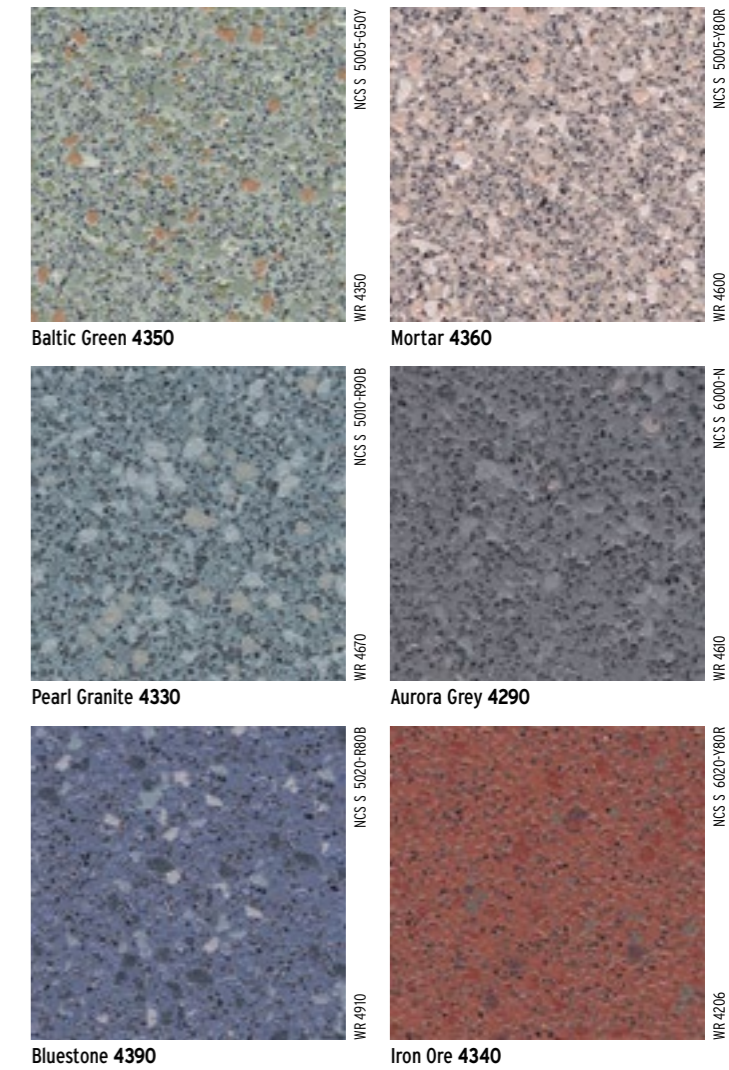


## KEY FEATURES

Enhanced levels of traction and safety underfoot due to high aggregate concentration and a specially engineered emboss.

Ideal for high footfall areas, such as food preparation areas or busy commercial kitchens, with risks of oil and grease spillages. Can also be used in continually wet and barefoot areas.

Slip resistance is assured for the guaranteed life of the product. ≥40 (Pendulum wet test - 4S Rubber) and ≥36 (TRL Rubber) with a surface roughness of Rz ≥70µm.



\* Refer to BRE Global ratings on [www.greenbooklive.com](http://www.greenbooklive.com)



## SPECIFICATIONS




GAUGE: 2.5mm


AVAILABILITY: Sheet: 2m x 20m

# Polysafe Hydro


HEAVY-DUTY SAFETY FLOORING WITH A RAISED EMOSS, FOR USE IN BAREFOOT AND SHOD AREAS

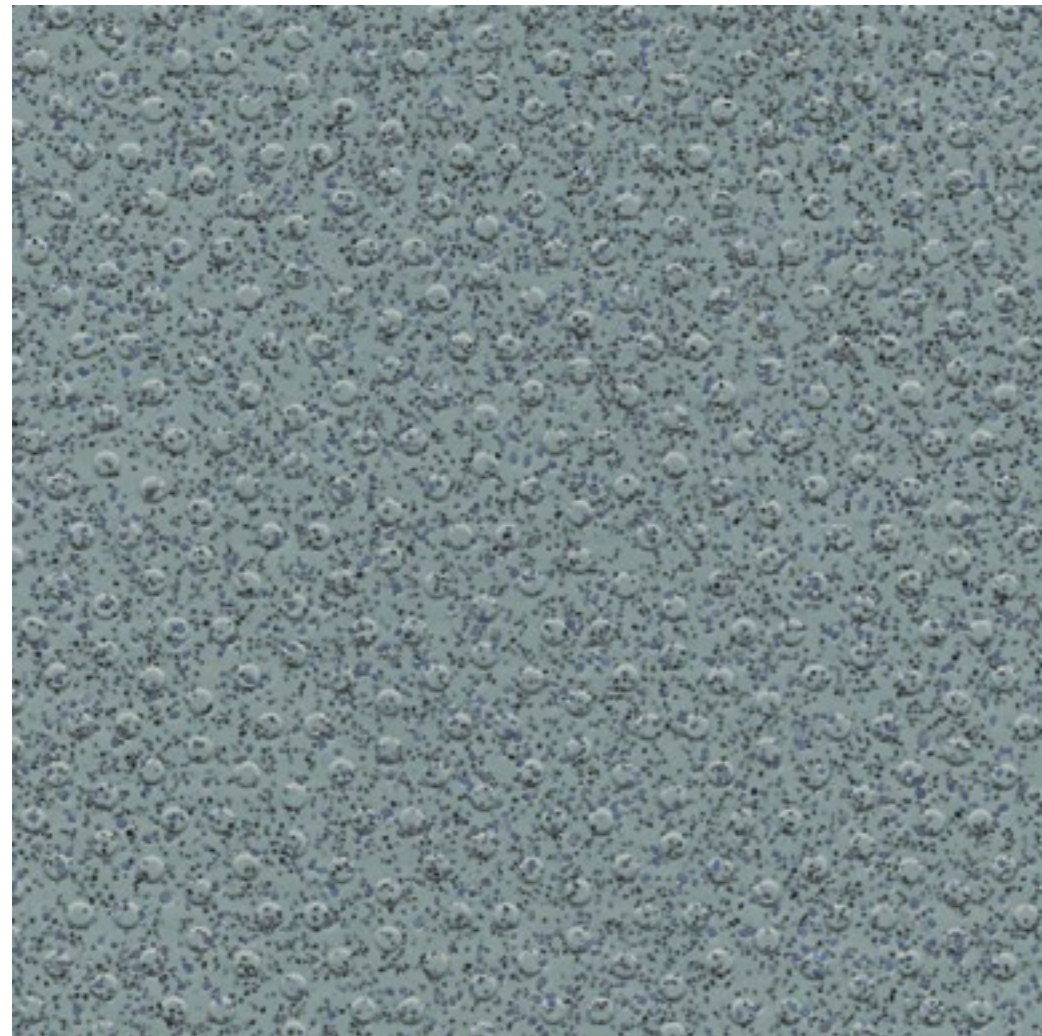


Sheared Slate H4960




Oystershell H4800




Bisque H4860




White Stone H4930




Marine H4870



Blue Forge H4850



Tempered Steel H4940



Woodland Grey H4770

## KEY FEATURES

Designed for barefoot and continually wet areas. Can also be used in shod areas subject to end user's risk assessment.

Features raised pimple emboss and a choice of multi-chip or traditional decorations.

Slip resistance is assured for the guaranteed life of the product.

≥36 (Pendulum wet test - TRL/4S Rubber).

Conforms to EN 13845 50,000 cycles abrasion test.



\* Refer to BRE Global ratings on [www.greenbooklive.com](http://www.greenbooklive.com)



## SPECIFICATIONS




GAUGE: 2.0mm


AVAILABILITY: Sheet: 2m x 20m

# Polysafe Hydro Evolve


HEAVY-DUTY SAFETY FLOORING WITH A RAISED EMOSS, FOR USE IN BAREFOOT AND SHOD AREAS

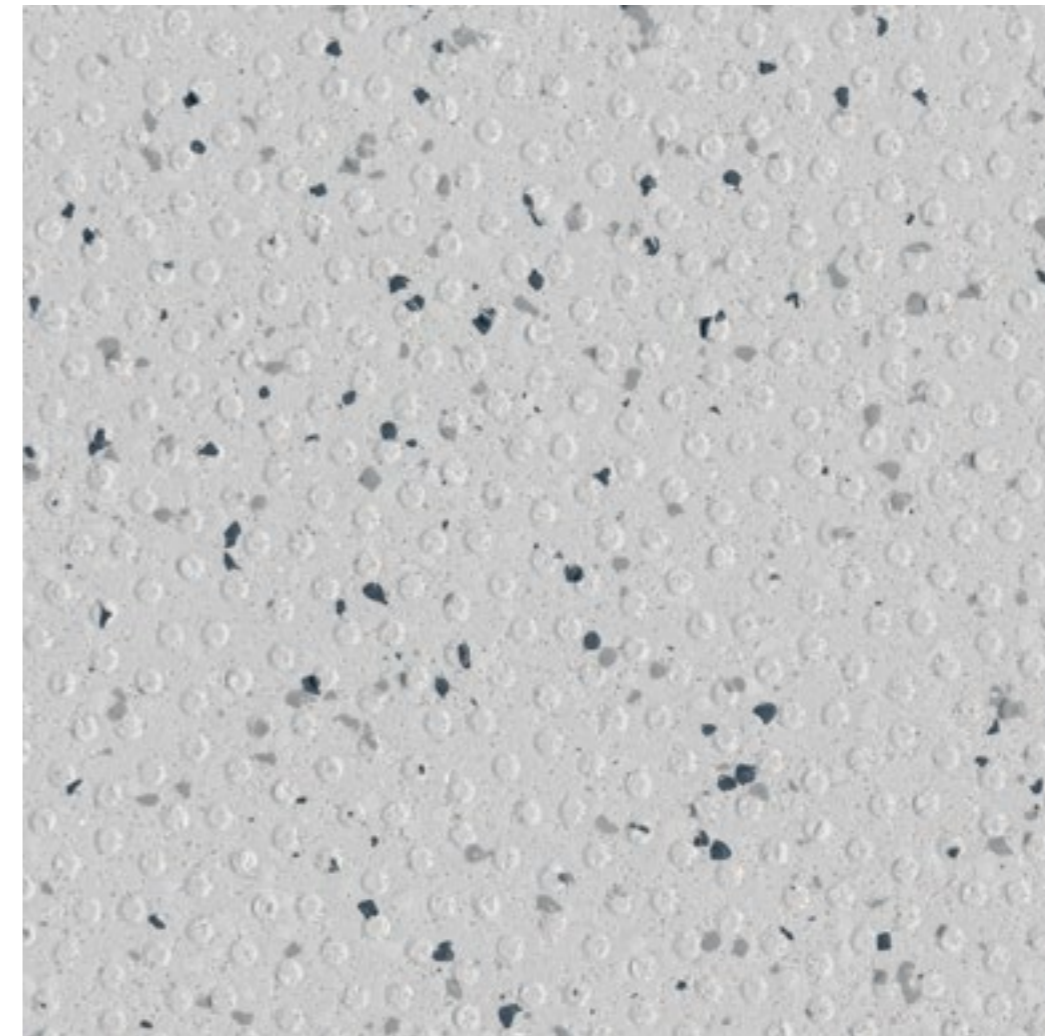


Colorado 4253



Tigris 4257




Blue Nile 4256




Adriatic 4258




Danube 4254



Amazon 4252

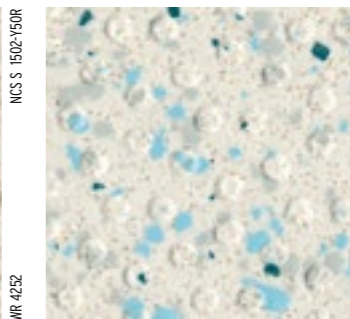

Indus 4251



Black Volta 4255

## KEY FEATURES

Designed for barefoot and continually wet areas. Can also be used in shod areas subject to end user's risk assessment.

Features pimple emboss and carborundum-free safety aggregates.

Slip resistance is assured for the guaranteed life of the product.

≥36 (Pendulum wet test - TRL/4S Rubber).

Conforms to EN 13845 50,000 cycles abrasion test.



† Refer to BRE Global ratings on [www.thegreenguide.org.uk](http://www.thegreenguide.org.uk)



## SPECIFICATIONS



GAUGE: 2.0mm

AVAILABILITY: Sheet: 2m x 20m

# Polysafe Wood fx Acoustix PUR


HEAVY-DUTY SAFETY FLOORING WITH ACOUSTIC PROPERTIES, FEATURING SOPHISTICATED WOOD DESIGNS




Brazilian Walnut 3992



Silver Oak 3352



Mahogany 3362



Cherry 3302




Warm Beech 3292



American Oak 3382



Rustic Oak 3332



European Oak 3342

## KEY FEATURES

Features Polysafe™ PUR for optimum appearance retention and life cycle maintenance cost savings of up to 60%.


Hardwearing safety floorcovering featuring authentic and contemporary wood designs.

Slip resistance is assured for the guaranteed life of the product.

≥36 (Pendulum wet test - 4S Rubber/Slider 96).

≥19dB impact sound reduction level to exceed Building Regulation Part E requirements.

Ergonomically designed for anti-fatigue benefits. Conforms to EN 651.



\* Refer to BRE Global ratings on www.greenbooklive.com

## SPECIFICATIONS




GAUGE: 3.7mm, wear layer 0.65mm

AVAILABILITY: Sheet: 2m x 20m


This product is a highly realistic replication of natural materials. Hence, on many designs, features such as knots will be present, as well as natural colour variation.

# Polysafe Apex


HEAVY-DUTY SAFETY FLOORING WITH ENHANCED SLIP RESISTANCE FOR EXTREME AREAS




Green Quartz 4201

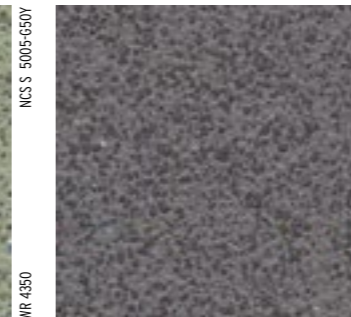


Chromite 4202




Biotite 4203

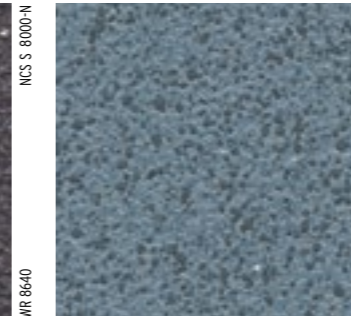

Breccia 4204



Siltstone 4205

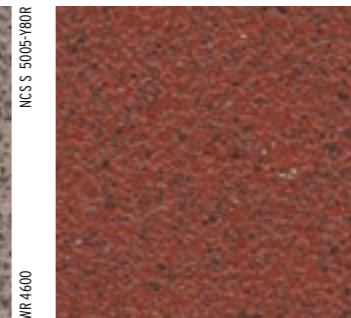

Red Ochre 4206



## KEY FEATURES

Enhanced levels of traction and safety underfoot due to high aggregate concentration and a specially engineered emboss.

Designed for busy commercial kitchen areas serving over 100 daily meals and suited to industrial food processing environments with regular spillage of oil and grease.

Slip resistance is assured for the guaranteed life of the product ≥45 (Pendulum wet test - 4S Rubber) with surface roughness of Rz ≥70µm.

R12 rated product.




Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

## SPECIFICATIONS



GAUGE: 2.5mm

AVAILABILITY: Sheet: 2m x 20m

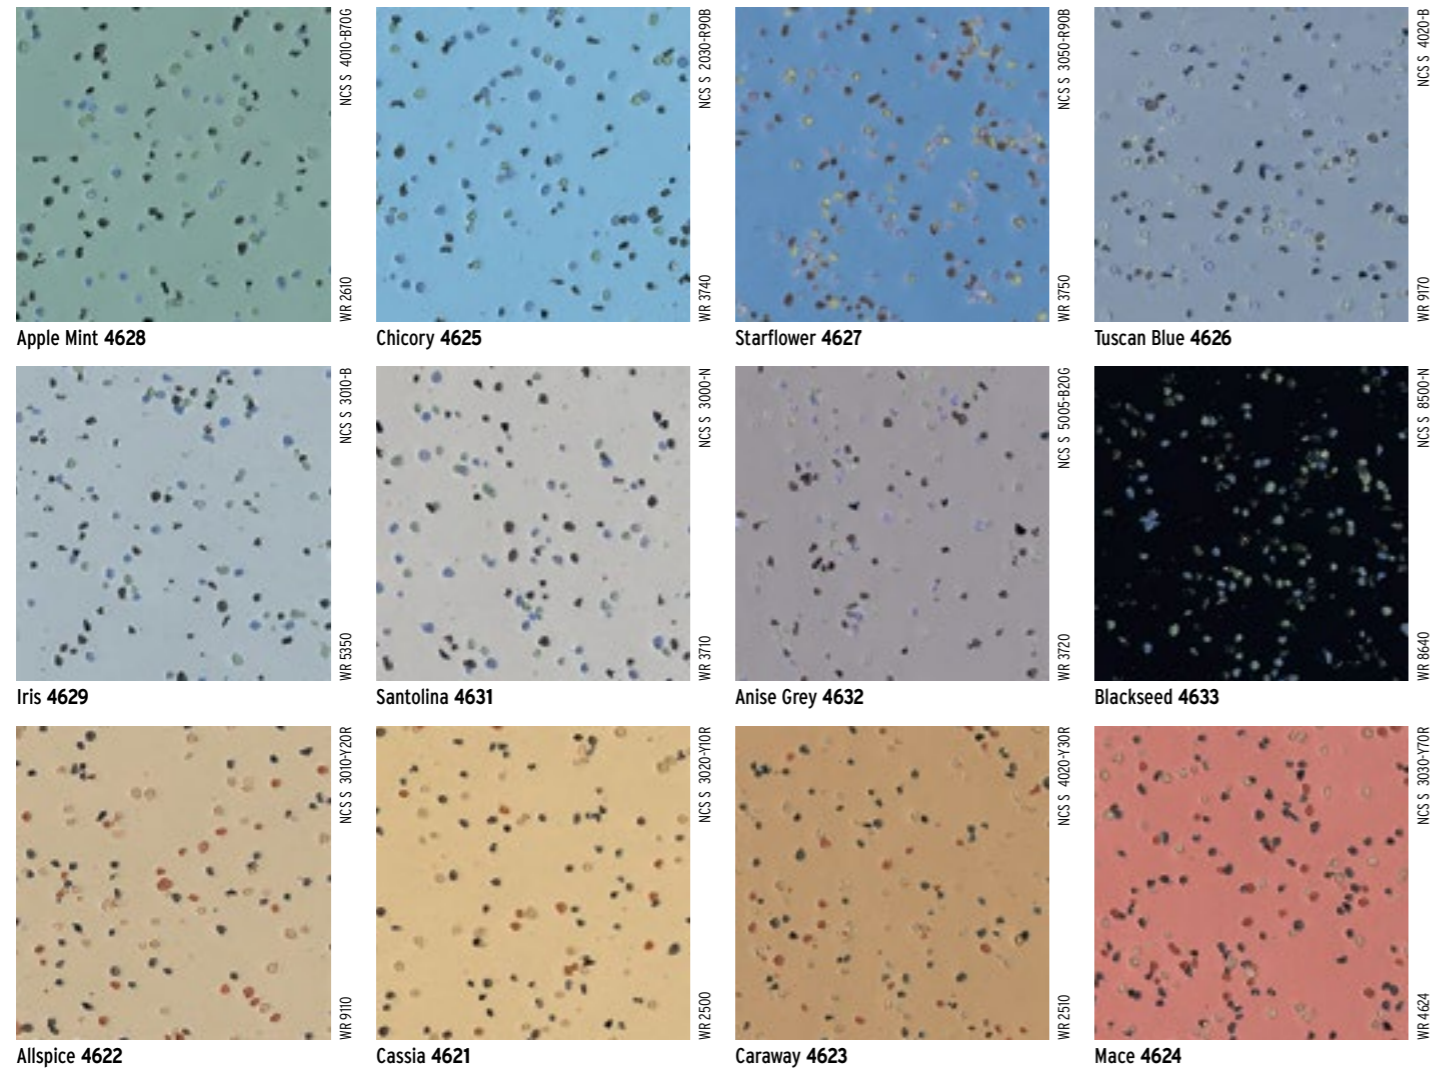

## KEY FEATURES


Incorporates complementary coloured quartz and silicon carbide particles, to improve traction and safety underfoot.

All the Polyflor XL hallmarks, now engineered as a safety range.

Conforms to EN 13845 50,000 cycles abrasion test.

Slip resistance is assured for the guaranteed life of the product.

≥36 (Pendulum wet test - 4S Rubber/Slider 96).



† Refer to BRE Global ratings on [www.thegreenguide.org.uk](http://www.thegreenguide.org.uk)




## SPECIFICATIONS



**GAUGE:** 2.0mm

**AVAILABILITY:** Sheet: 2m x 20m

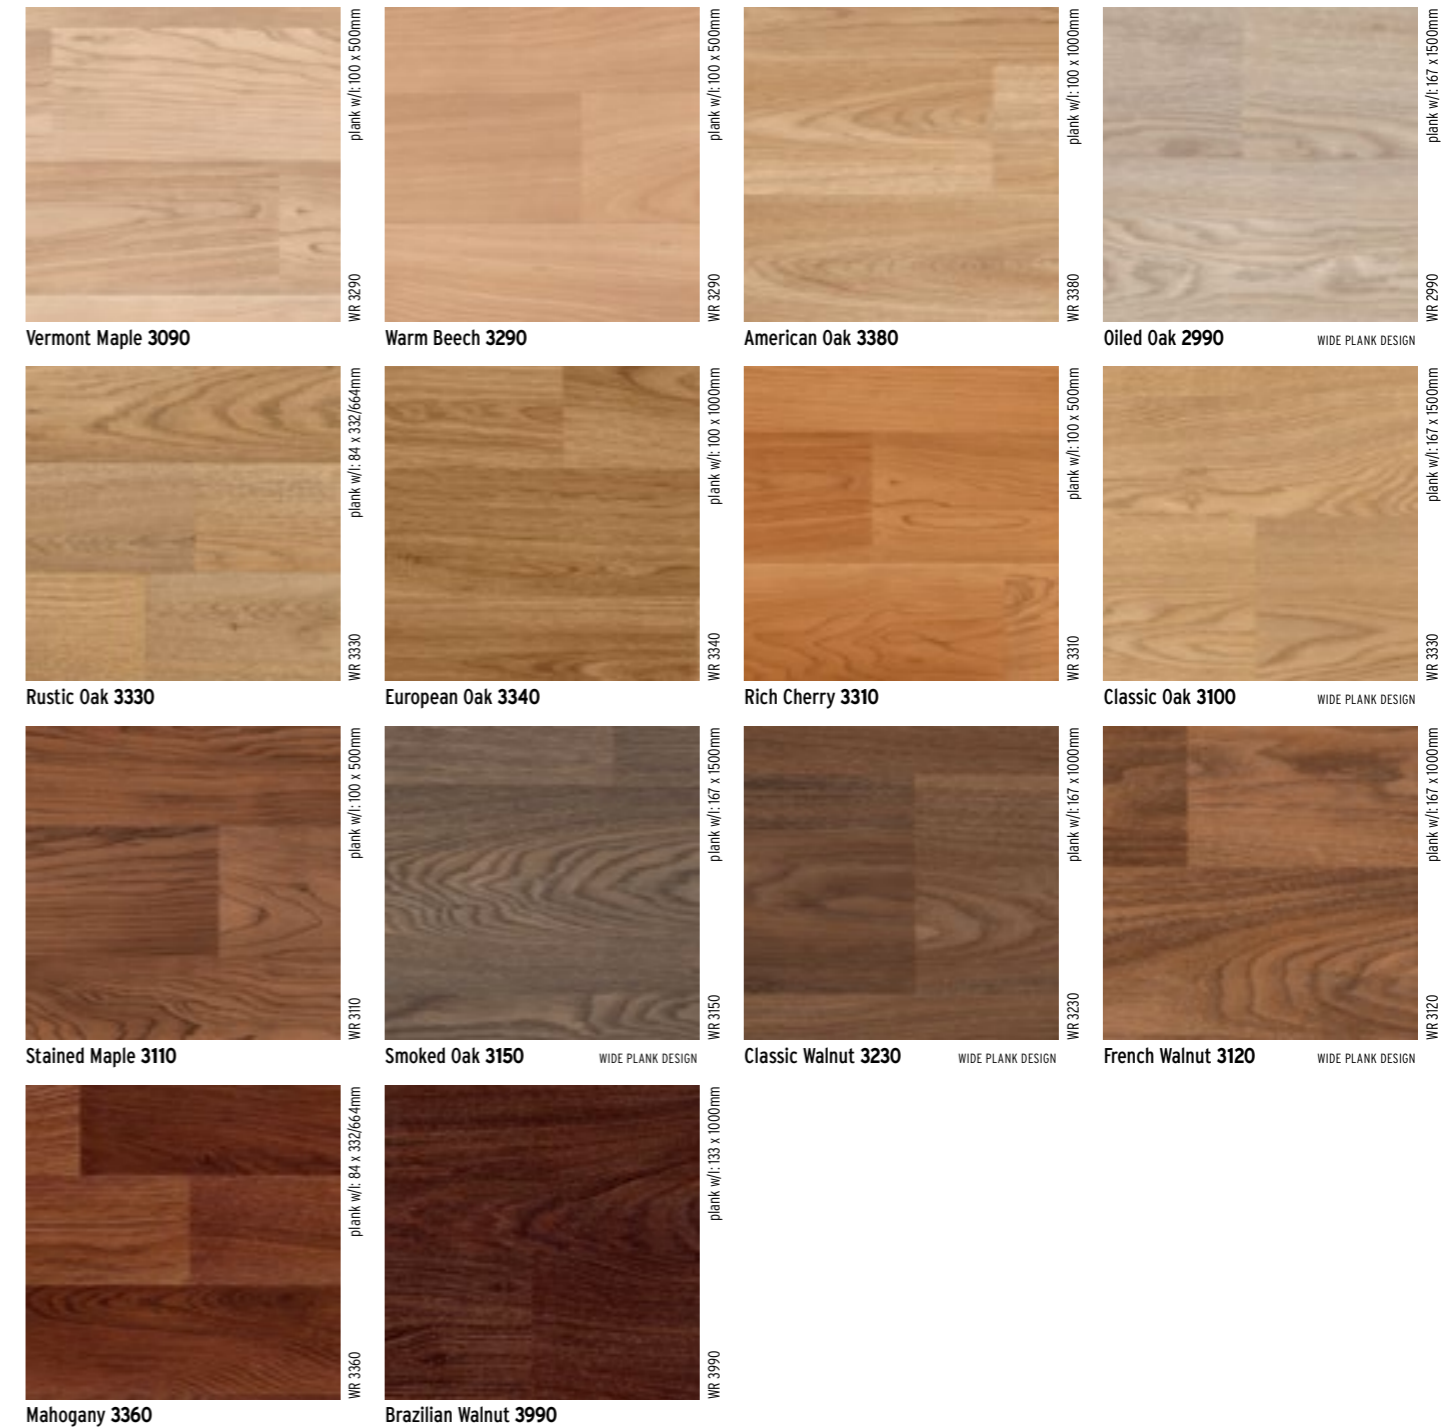


## KEY FEATURES

Heterogeneous commercial vinyl sheet floorcovering.

Highly realistic wood designs in a choice of 14 shades.

Polyurethane reinforcement, to facilitate a low-cost, polish-free maintenance regime.

Conforms to EN 649 / EN ISO 10582.



\* Refer to BRE Global ratings on [www.thegreenguide.org.uk](http://www.thegreenguide.org.uk)



## SPECIFICATIONS



**GAUGE:** 2.0mm, wear layer 0.7mm

**AVAILABILITY:** Sheet: 2m x 20m

This product is a highly realistic replication of natural materials. Hence, on many designs, features such as knots will be present, as well as natural colour variation.

# Acoustix Forest fx PUR

HARDWEARING COMMERCIAL SHEET VINYL FLOORCOVERING PROVIDING IMPACT SOUND REDUCTION OF 19dB



plank w/l: 84 x 332/664mm  
WR 3330


Rustic Oak 3335



plank w/l: 167 x 1500mm  
WR 2990

Oiled Oak 3095

WIDE PLANK DESIGN

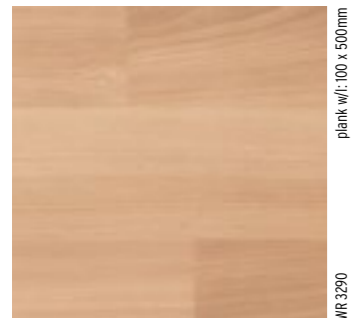

plank w/l: 100 x 500mm  
WR 3290

Warm Beech 3295



plank w/l: 100 x 1000mm  
WR 3380


American Oak 3385



plank w/l: 167 x 1500mm  
WR 3330

Classic Oak 3125


WIDE PLANK DESIGN



plank w/l: 167 x 1500mm  
WR 3150

Smoked Oak 3155

WIDE PLANK DESIGN

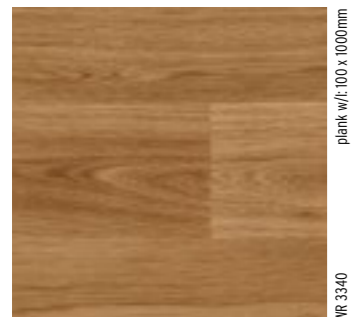

plank w/l: 100 x 1000mm  
WR 3340

European Oak 3345



plank w/l: 167 x 1000mm  
WR 3230

Classic Walnut 3235

WIDE PLANK DESIGN


## KEY FEATURES

Heterogeneous vinyl sheet flooring designed for areas which require impact noise reduction.

Choice of highly realistic and popular wood designs.

Polyurethane reinforcement to facilitate a lifelong, low-cost, polish-free maintenance regime.

Conforms to EN 651.



\* Refer to BRE Global ratings on www.greenbooklive.com

## SPECIFICATIONS




**GAUGE:** 3.7mm, wear layer 0.65mm  
**AVAILABILITY:** Sheet: 2m x 20m

This product is a highly realistic replication of natural materials. Hence, on many designs, features such as knots will be present, as well as natural colour variation.

# Acoustix Gallery fx PUR

HARDWEARING COMMERCIAL SHEET VINYL FLOORCOVERING PROVIDING IMPACT SOUND REDUCTION OF 19dB

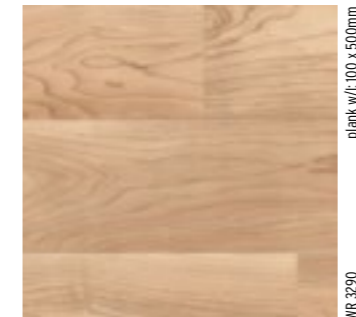

plank w/l: 100 x 500mm  
WR 3290

Vermont Maple 6837




NCS S 2002-Y50R  
WR 9803

Mercury 6840



NCS S 3500-N  
WR 9804

Zinc 6841

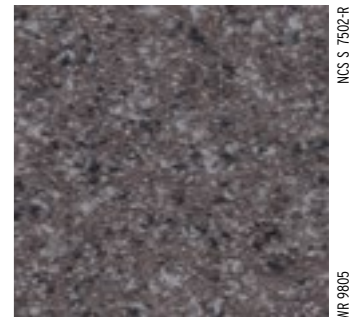

NCS S 7502-R  
WR 9805

Onyx 6842



plank w/l: 100 x 1000mm  
WR 3380

American Oak 6815



NCS S 2005-Y30R  
WR 9800

Silica Sand 6843



NCS S 3010-Y20R  
WR 9801

Mica Sand 6844




NCS S 4005-Y50R  
WR 9802

Earth 6845




plank w/l: 84 x 332/664mm  
WR 3330

Rustic Oak 6836

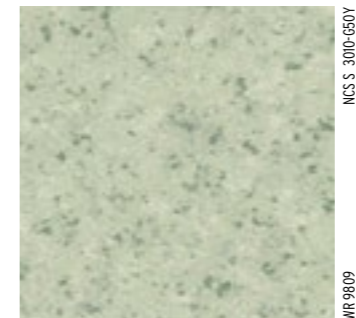


NCS S 3010-G50Y  
WR 9809

Euclase Green 6846

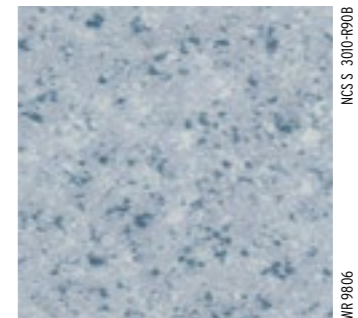

NCS S 3010-R90B  
WR 9806

Celestine Blue 6847

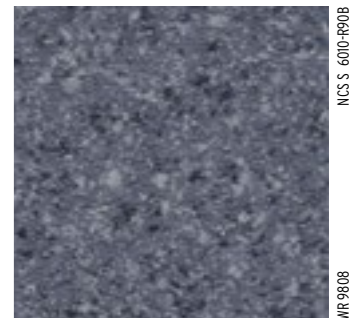


NCS S 6010-R90B  
WR 9808

Lazulite Blue 6848



plank w/l: 100 x 1000mm  
WR 3340

European Oak 6835

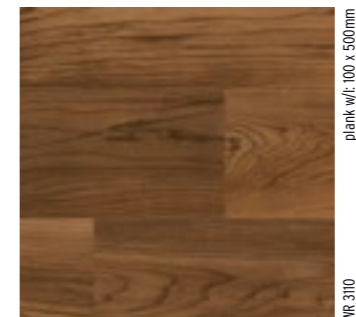

plank w/l: 100 x 500mm  
WR 3110

Stained Maple 6838


## KEY FEATURES

Heterogeneous vinyl sheet flooring designed for areas which require impact noise reduction.

Choice of highly realistic wood and micro-granite designs.

Polyurethane reinforcement to facilitate a lifelong, low-cost polish-free maintenance regime

Conforms to EN 651.



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

## SPECIFICATIONS



**GAUGE:** 3.7mm, wear layer 0.6mm  
**AVAILABILITY:** Sheet: 2m x 20m


This product is a highly realistic replication of natural materials. Hence, on many designs, features such as knots will be present, as well as natural colour variation.



**Natural Oak 2126**  
plank w/l: 200 x 1000mm




**Alabaster Elm 2123**  
plank w/l: 166 x 1000mm



**Aspen 2124**  
plank w/l: 100 x 1000mm




**Norwegian Maple 2125**  
plank w/l: 80 x 1000mm



**Blond Oak 2127**  
plank w/l: 200 x 1500mm




**Golden Oak 2128**  
plank w/l: 62.5 x 500/1000mm



**Antique Herringbone 2129**  
plank w/l: 140 x 710mm




**Country Oak 2130**  
plank w/l: 200 x 1500mm




**Antique Oak 2131**  
plank w/l: 200 x 1500mm



**Sweet Chestnut 2132**  
plank w/l: 100 x 1000mm




**Black Walnut 2133**  
plank w/l: 100 x 420/580mm




**African Mahogany 2134**  
plank w/l: 62.5 x 500/1000mm




**Ebony 2135**  
plank w/l: 100/150 x 1000mm




**Yorkstone 2110**  
tile w/l: 333 x 500mm



**Limestone 2111**  
tile w/l: 333 x 500mm




**Peakmoor Sandstone 2112**  
tile w/l: 235 x 235mm




**Farmhouse Terracotta 2113**  
tile w/l: 165 x 165mm




**Black Slate 2114**  
tile w/l: 333 x 500mm



**Riviera Sands 2115**



**Riviera Taupe 2116**




**Riviera Bluebell 2117**




**Polished Concrete 2118**




**Grey Flagstone 2119**  
tile w/l: 375 x 400mm



**Linear Ivory 2120**



**Linear Fawn 2121**



**Linear Charcoal 2122**

## KEY FEATURES

Heterogeneous Luxury Vinyl Sheet Flooring for light commercial and domestic applications.

Authentically reproduced wood and stone designs, and modern abstract patterns.

Polyurethane reinforcement to facilitate a low-cost, polish-free maintenance regime.

Conforms to EN 653 / EN ISO 26986.



† Refer to BRE Global ratings on [www.thegreenguide.org.uk](http://www.thegreenguide.org.uk)

## SPECIFICATIONS

The **R** values shown denote a ramp test result, which is an ex-factory measure of slip resistance. For safety flooring with sustainable wet slip resistance, refer to Expona Control PUR or the Polysafe ranges.



**GAUGE:** 3.0mm, wear layer 0.35mm  
**AVAILABILITY:** Sheet: 2m x 25m  
3m x 25m  
4m x 25m

This product is a highly realistic replication of natural materials. Hence, on many designs, features such as knots will be present, as well as natural colour variation.





# NEW Designatex PUR


HARDWEARING TEXTILE BACKED LUXURY VINYL SHEET




## WOOD



**Chalk White Oak 2141**  
plank w/l: 200 x 1500mm




**Honey Limed Ash 2143**  
plank w/l: 166 x 1500mm




**California Oak 2145**  
plank w/l: 166 x 1500mm




**Cornish Oak 2146**  
plank w/l: 166 x 1500mm

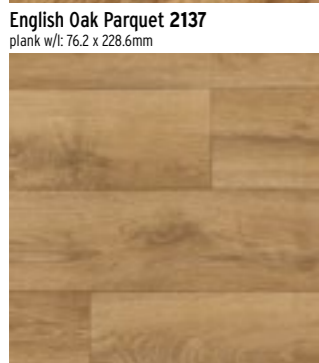


**English Oak Parquet 2137**  
plank w/l: 76.2 x 228.6mm



**Columned Ash 2140**  
plank w/l: 500 x 40-120mm



**Laurel Oak Parquet 2136**  
plank w/l: 76.2 x 228.6mm



**Rich Oak Parquet 2138**  
plank w/l: 76.2 x 228.6mm




**Sicilian Oak 2147**  
plank w/l: 166 x 1500mm



**Smokehouse Herringbone 2139**  
plank w/l: 140 x 710mm



**Platinum Oak 2142**  
plank w/l: 166 x 1500mm



**Nero Oak 2144**  
plank w/l: 125 x 1000mm

## KEY FEATURES

Heterogeneous Luxury Vinyl Sheet Flooring for light commercial and domestic applications.

Authentically reproduced wood and stone designs.


Polyurethane reinforcement to facilitate a low-cost, polish-free maintenance regime.

Conforms to EN 653 / EN ISO 26986.




† Refer to BRE Global ratings on [www.thegreenguide.org.uk](http://www.thegreenguide.org.uk)


## STONE




**Barça Limestone 2150**  
tile w/l: 500-800 x 143mm




**Manhattan Limestone 2151**  
tile w/l: 500-800 x 143mm




**Cottage Paving 2148**  
tile w/l: 166 x 166-333 x 500mm



**Quarried Slate 2152**  
tile w/l: 500-1000 x 35-135mm



**Tuscan Paving 2149**  
tile w/l: 166 x 166-333 x 500mm



**Noir Slate 2153**  
tile w/l: 500-1000 x 35-135mm

## SPECIFICATIONS

The **R10** values shown denote a ramp test result, which is an ex-factory measure of slip resistance. For safety flooring with sustainable wet slip resistance, refer to Expona Control PUR or the Polysafe ranges.



**GAUGE:** 3.0mm, wear layer 0.3mm  
**AVAILABILITY:** Sheet: 2m x 25m  
3m x 25m  
4m x 25m

This product is a highly realistic replication of natural materials. Hence, on many designs, features such as knots will be present, as well as natural colour variation.



# Expona Flow PUR

HARDWEARING COMMERCIAL SHEET VINYL FLOORCOVERING, INCLUDING STYLISH WOOD AND EFFECT DESIGNS




## WOOD




## KEY FEATURES

- Heterogeneous commercial vinyl sheet floorcovering.
- Authentic wood and contemporary effect designs, in a choice of 50 shades.
- Polyurethane reinforcement, to facilitate a low-cost, polish-free maintenance regime.
- Conforms to EN 649 / EN ISO 10582.



\* Refer to BRE Global ratings on [www.greenbooklive.com](http://www.greenbooklive.com)

## INFINITY

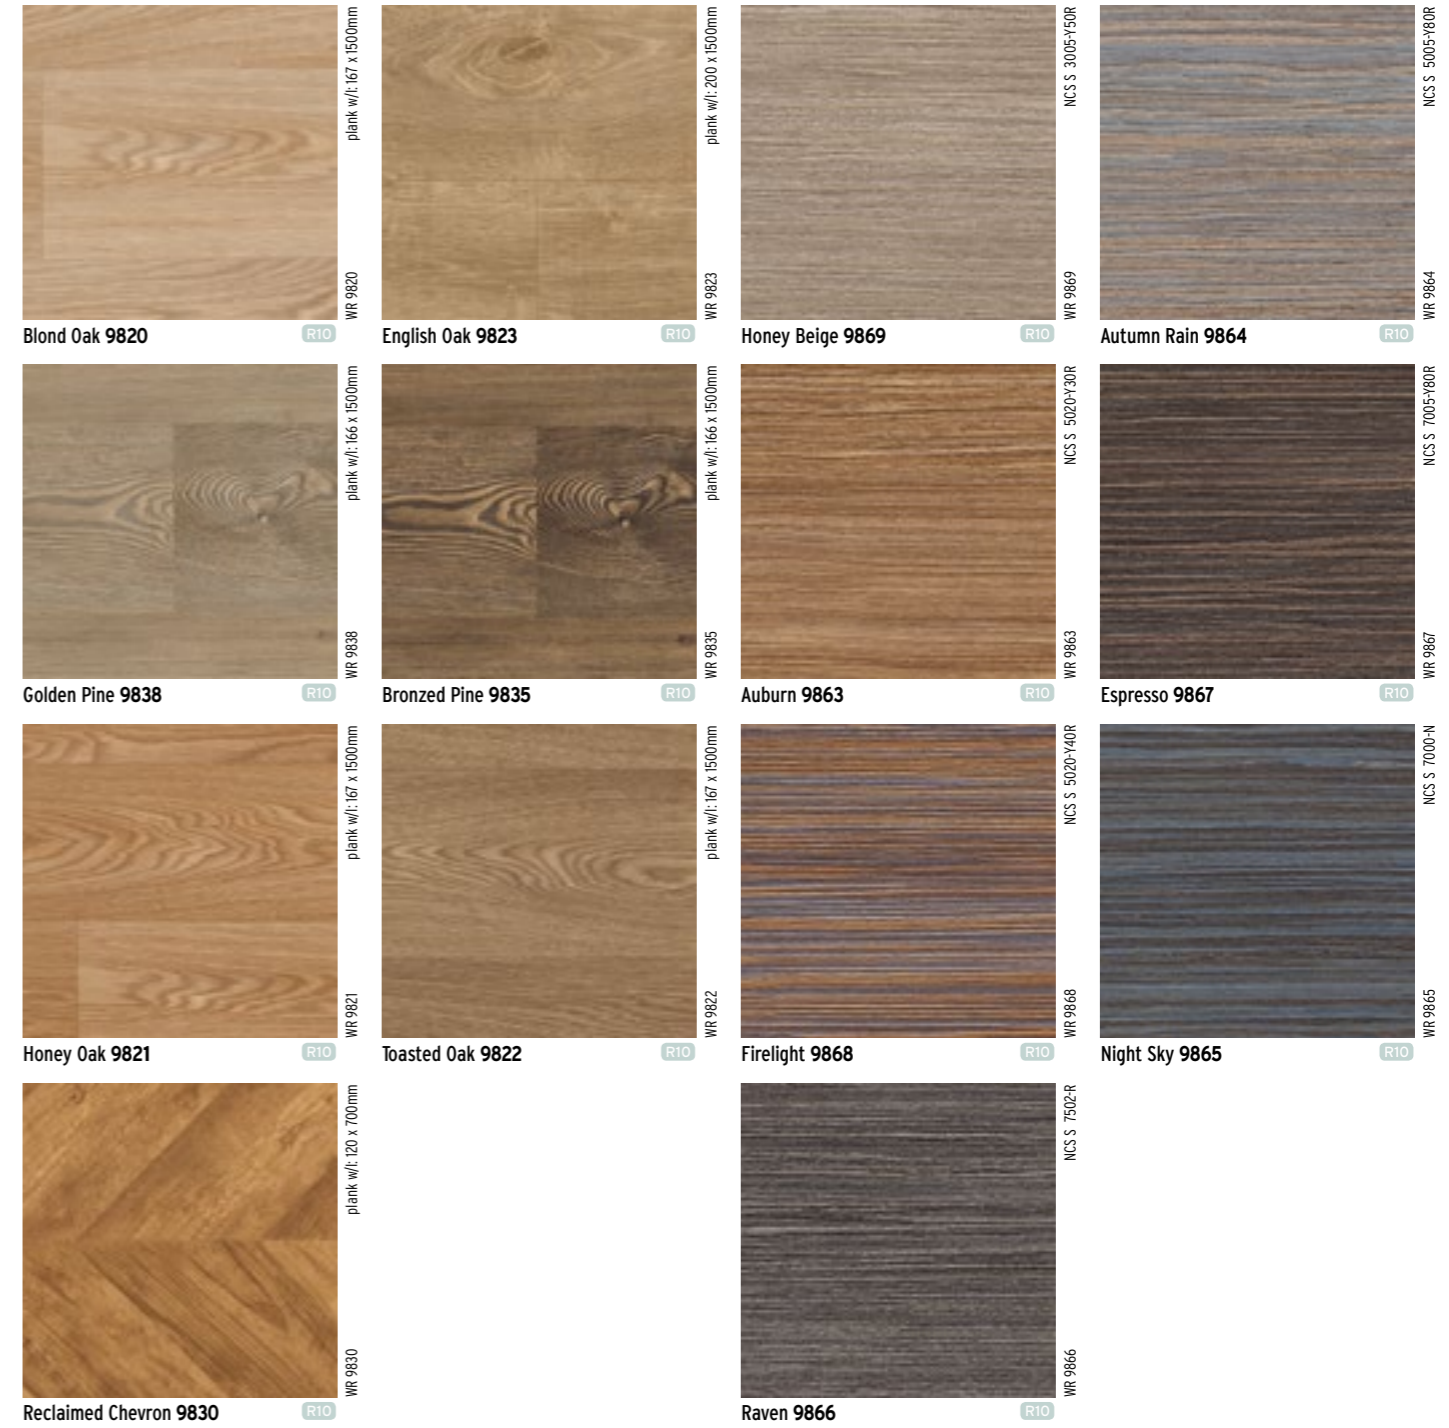

The R values shown denote a ramp test result, which is an ex-factory measure of slip resistance. For safety flooring with sustainable wet slip resistance, refer to Expona Control PUR or the Polysafe ranges.

## SPECIFICATIONS



**GAUGE:** 2.0mm, wear layer 0.7mm  
**AVAILABILITY:** Sheet: 2m x 20m

This product is a highly realistic replication of natural materials. Hence, on many designs, features such as knots will be present, as well as natural colour variation.



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

# Expona Flow PUR

HARDWEARING COMMERCIAL SHEET VINYL FLOORCOVERING, INCLUDING STYLISH WOOD AND EFFECT DESIGNS




## COSMOS





## KEY FEATURES

- Heterogeneous commercial vinyl sheet floorcovering.
- Authentic wood and contemporary effect designs, in a choice of 50 shades.
- Polyurethane reinforcement, to facilitate a low-cost, polish-free maintenance regime.
- Conforms to EN 649 / EN ISO 10582.



\* Refer to BRE Global ratings on [www.greenbooklive.com](http://www.greenbooklive.com)

## CONCRETE

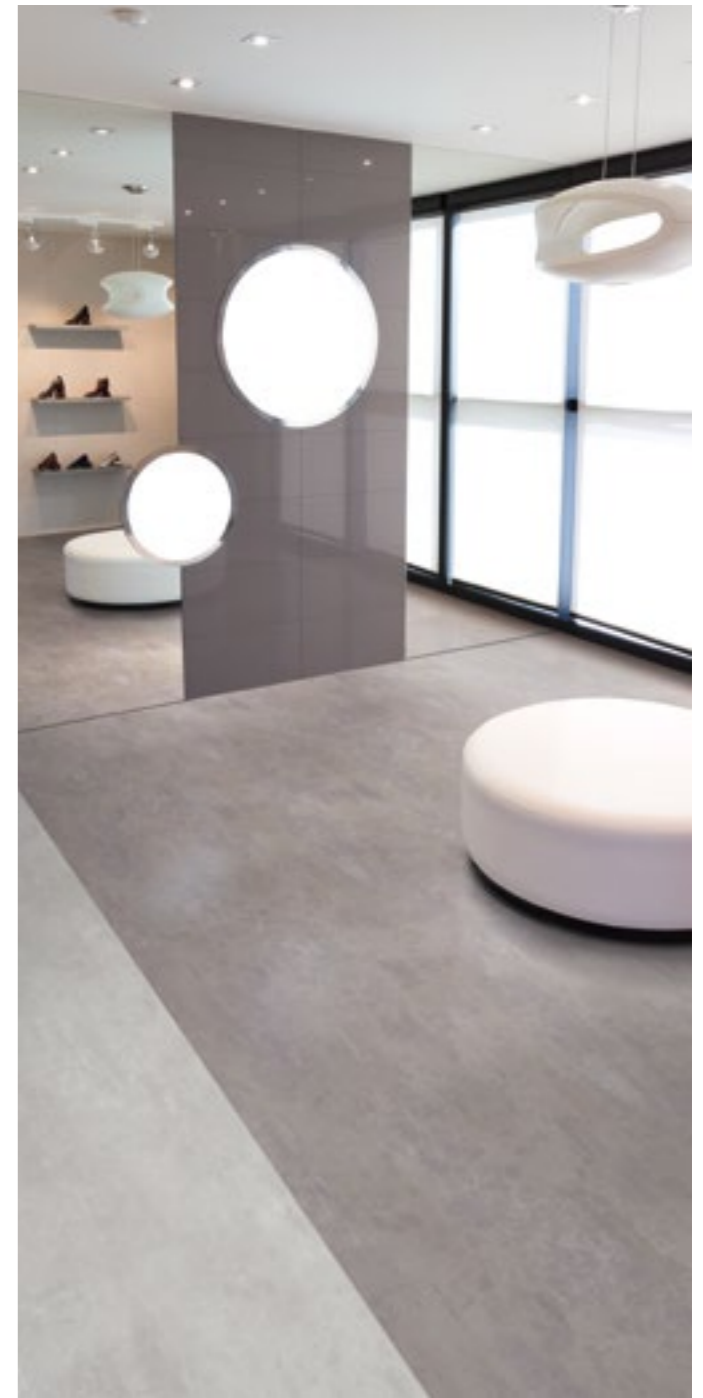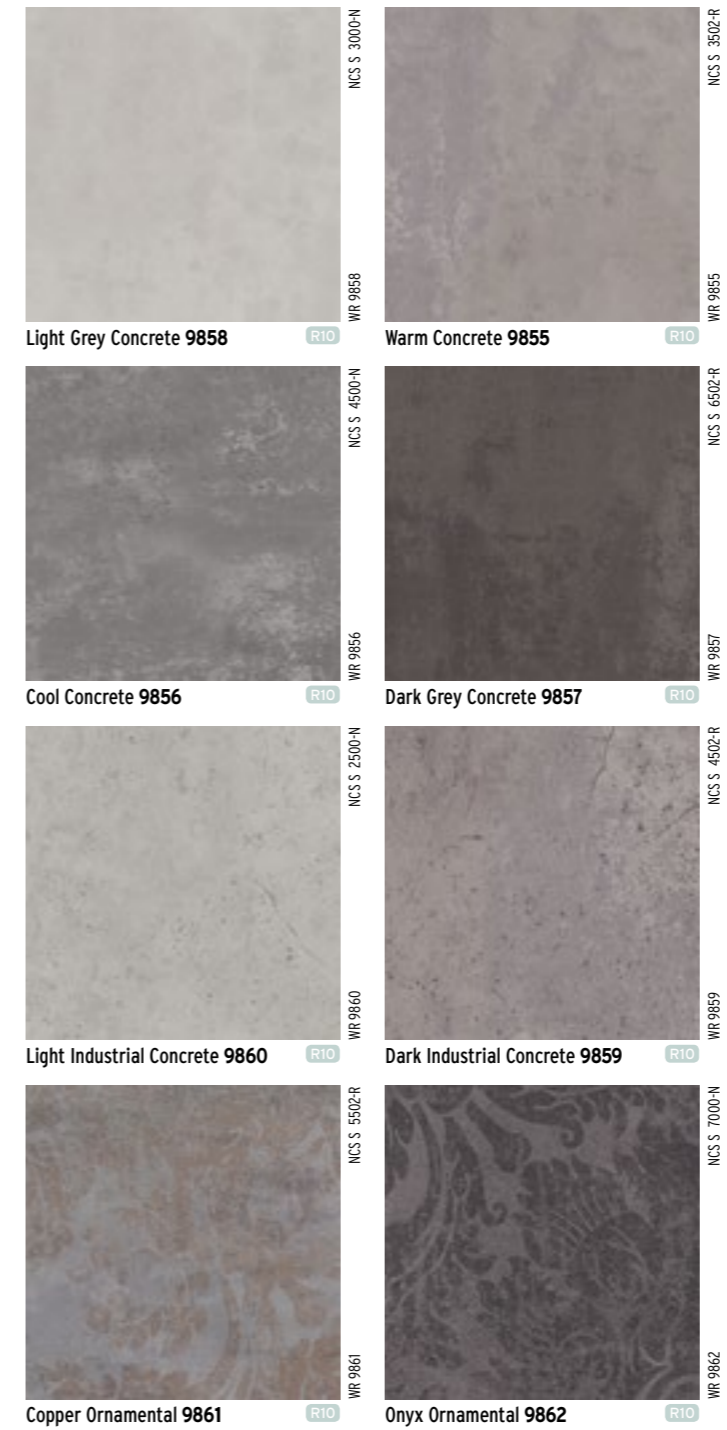

The R values shown denote a ramp test result, which is an ex-factory measure of slip resistance. For safety flooring with sustainable wet slip resistance, refer to Expona Control PUR or the Polysafe ranges.

## SPECIFICATIONS



**GAUGE:** 2.0mm, wear layer 0.7mm  
**AVAILABILITY:** Sheet: 2m x 20m

This product is a highly realistic replication of natural materials. Hence, on many designs, natural variations in texture and colour will be present.



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.



**Beige Weathered Spruce 4074**  
203 x 1219mm



**Nut Tree 1907**  
101 x 914mm



**Vintage Timber 4091**  
101 x 914mm




**Grey Ash 4020**  
152 x 1219mm



**Beige Varnished Wood 4069**  
152 x 1219mm



**American Oak 4059**  
152 x 914mm




**Honey Classic Oak 4086**  
152 x 1219mm



**Light Pine 4061**  
152 x 1219mm



**Light Varnished Wood 4071**  
152 x 1219mm



**Light Classic Oak 4085**  
152 x 1219mm




**Classic Oak 1902**  
101 x 914mm




**Honey Ash 4022**  
152 x 1219mm




**Blue Varnished Wood 4070**  
152 x 1219mm



**Blond Limed Oak 4081**  
203 x 1219mm



**Dark Classic Oak 4088**  
152 x 1219mm



**Blue Weathered Spruce 4073**  
203 x 1219mm




**Blue Recycled Wood 4068**  
Mixed sizes



**Grey Limed Oak 4082**  
203 x 1219mm




**Brown Weathered Spruce 4072**  
203 x 1219mm




**Brown Limed Oak 4084**  
203 x 1219mm




**Dark Recycled Wood 4067**  
Mixed sizes




**Grey Pine 4063**  
152 x 1219mm




**Red Heritage Cherry 4066**  
184 x 1219mm




**Dark Limed Oak 4083**  
203 x 1219mm




**Weathered Country Plank 4019**  
152 x 914mm



**Brown Heritage Cherry 4065**  
184 x 1219mm



**Indian Ebony 1969**  
101 x 914mm



**Graphite Pine 4062**  
152 x 1219mm



**Aged Elm 4036**  
152 x 914mm

4067 and 4068 feature mixed plank sizes: 76 x 914, 101 x 914, 152 x 914mm

The **R** values shown denote a ramp test result, which is an ex-factory measure of slip resistance. For safety flooring with sustainable wet slip resistance, refer to Expona Control PUR or the Polysafe ranges.

These items feature a bevelled edge.

## SPECIFICATIONS



**GAUGE:** 2.5mm, wear layer 0.55mm  
**AVAILABILITY:** Plank: sizes as shown

This product is a highly realistic replication of natural materials. Hence, on many designs, features such as knots will be present, as well as natural colour variation.

## KEY FEATURES


Luxury vinyl tile range featuring traditional, rustic and contemporary designs.

Sophisticated and extensive collection with realistic emboss finishes.

Polyurethane reinforcement provides an excellent foundation for an ongoing cleaning regime, leading to maintenance cost savings.

Indoor Air Comfort GOLD - Eurofins certified product.

Conforms to EN 649 / EN ISO 10582.



\* Refer to BRE Global ratings on www.greenbooklive.com




Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

# Expona Commercial PUR


AUTHENTIC STONE AND EFFECTS COLLECTION FOR HEAVY COMMERCIAL APPLICATIONS



**Crème Swirl 5048**  
457 x 457mm




**Beige Travertine 5061**  
305 x 610mm



**Classic Yorkstone 1992**  
457 x 457mm



**Light Grey Travertine 5062**  
305 x 610mm



**Exposed Concrete 5028**  
457 x 457mm




**Green Swirl 5047**  
457 x 457mm




**Birch Trunk 4077**  
305 x 914mm




**Dark Grey Travertine 5063**  
305 x 610mm




**Cambrian Stone 1993**  
457 x 457mm



**Grey Plywood 4075**  
305 x 914mm




**Brown Plywood 4076**  
305 x 914mm



**Silver Slate 1921**  
457 x 457mm




**Light Grey Concrete 5067**  
610 x 610mm




**Cool Grey Concrete 5068**  
610 x 610mm




**Warm Grey Concrete 5064**  
610 x 610mm




**Dark Grey Concrete 5069**  
610 x 610mm




**Beige Brazilian Slate 5041**  
610 x 610mm



**White Brazilian Slate 5042**  
610 x 610mm



**Gold Brazilian Slate 5043**  
610 x 610mm



**Taupe Brazilian Slate 5044**  
610 x 610mm




**Crème Matrix 5076**  
610 x 610mm



**Light Grey Matrix 5074**  
610 x 610mm




**Mocca Matrix 5075**  
610 x 610mm



**Black Matrix 5071**  
610 x 610mm



**Nature Texture 5078**  
610 x 610mm



**Black Texture 5077**  
610 x 610mm

## KEY FEATURES

Luxury vinyl tile range featuring traditional, rustic and contemporary designs.

Sophisticated and extensive collection with realistic emboss finishes.

Polyurethane reinforcement provides an excellent foundation for an ongoing cleaning regime, leading to maintenance cost savings.

Indoor Air Comfort GOLD - Eurofins certified product.

Conforms to EN 649 / EN ISO 10582.



\* Refer to BRE Global ratings on [www.greenbooklive.com](http://www.greenbooklive.com)

## SPECIFICATIONS

The R values shown denote a ramp test result, which is an ex-factory measure of slip resistance. For safety flooring with sustainable wet slip resistance, refer to Expona Control PUR or the Polysafe ranges.



**GAUGE:** 2.5mm, wear layer 0.55mm  
**AVAILABILITY:** Tile: sizes as shown



This product is a highly realistic replication of natural materials. Hence, on many designs, features such as knots will be present, as well as natural colour variation.

Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

# Expona Design PUR

ELEGANT WOOD AND AUTHENTIC STONE AND EFFECTS COLLECTION FOR VERY HEAVY COMMERCIAL APPLICATIONS



## KEY FEATURES

- Luxury vinyl tile range featuring traditional, rustic and contemporary designs.
- Sophisticated and extensive collection with realistic emboss finishes.
- Polyurethane reinforcement provides an excellent foundation for an ongoing cleaning regime, leading to maintenance cost savings.
- Indoor Air Comfort GOLD - Eurofins certified product.
- Conforms to EN 649 / EN ISO 10582.



† Refer to BRE Global ratings on [www.thegreenguide.org.uk](http://www.thegreenguide.org.uk)

## SPECIFICATIONS

The R values shown denote a ramp test result, which is an ex-factory measure of slip resistance. For safety flooring with sustainable wet slip resistance, refer to Expona Control PUR or the Polysafe ranges.

These items feature a bevelled edge.



**GAUGE:** 3.0mm, wear layer 0.7mm  
**AVAILABILITY:** Tile & Plank: sizes as shown




This product is a highly realistic replication of natural materials. Hence, on many designs, natural variations in texture and colour will be present.

Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

# Expona Control PUR


LUXURY VINYL TILES WITH SUSTAINABLE WET SLIP RESISTANCE



**American Oak 6500**  
152 x 914mm




**White Oak 6505**  
152 x 914mm




**Blond Country Plank 6501**  
152 x 914mm




**Light Elm 6506**  
152 x 914mm




**Nut Tree 6502**  
152 x 914mm



**Weathered Country Plank 6504**  
152 x 914mm




**Classic Oak 6503**  
152 x 914mm




**Portland Stone 7500**  
457 x 457mm




**Classic Yorkstone 7502**  
457 x 457mm



**Classic Limestone 7501**  
457 x 457mm




**Cambrian Stone 7507**  
305 x 610mm



**Smoked Limestone 7503**  
457 x 457mm



**Warm Grey Concrete 7504**  
457 x 457mm



**Roman Limestone 7506**  
305 x 610mm


## KEY FEATURES

- The first EN 13845 sustainable slip resistant LVT in the World.
- Featuring a polyurethane reinforcement to assist ongoing maintenance, offering cost saving of up to 60%.
- Incorporates aluminium oxide particles to improve traction and safety underfoot.
- Slip resistance is assured for the guaranteed life of the product.
- ≥36 (Pendulum wet test - 4S Rubber/Slider 96).
- Conforms to EN 13845 50,000 cycles abrasion test.



† Refer to BRE Global ratings on [www.thegreenguide.org.uk](http://www.thegreenguide.org.uk)

## SPECIFICATIONS



**GAUGE:** 2.5mm, wear layer 0.7mm  
**AVAILABILITY:** Tile & Plank: sizes as shown



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

# NEW Expona SimpLay PUR

LOOSE LAY VINYL FLOOR TILES AND PLANKS



## WOOD

	
<b>Blond Country Oak 2507</b> 177.8 x 1219.2mm	<b>American Oak 2503</b> 177.8 x 1219.2mm
	
<b>White Rustic Pine 2513</b> 177.8 x 1219.2mm	<b>Grey Country Oak 2506</b> 177.8 x 1219.2mm
	
<b>Grey Ash 2512</b> 177.8 x 1219.2mm	<b>Grey Rustic Oak 2516</b> 177.8 x 1219.2mm
	
<b>Light Grey Finline 2509</b> 177.8 x 1219.2mm	<b>Dark Grey Finline 2510</b> 177.8 x 1219.2mm

			
<b>Medium Classic Oak 2521</b> 185 x 1505mm	<b>Natural Oak 2502</b> 177.8 x 1219.2mm	<b>Natural Rustic Oak 2517</b> 177.8 x 1219.2mm	<b>Natural Ash 2511</b> 177.8 x 1219.2mm
			
<b>Light Classic Oak 2520</b> 185 x 1505mm	<b>Light Cherry 2501</b> 177.8 x 1219.2mm	<b>Golden Rustic Oak 2508</b> 177.8 x 1219.2mm	<b>Rich Oak 2500</b> 177.8 x 1219.2mm
			
<b>Natural Rustic Pine 2514</b> 177.8 x 1219.2mm	<b>Brown Mystique Wood 2519</b> 185 x 1505mm	<b>Brown Rustic Oak 2515</b> 177.8 x 1219.2mm	<b>Rich Walnut 2504</b> 177.8 x 1219.2mm
			
<b>Grey Mystique Wood 2518</b> 185 x 1505mm	<b>Dark Country Oak 2505</b> 177.8 x 1219.2mm		


## KEY FEATURES

- A collection of heavy commercial loose lay tiles and planks designed to reduce installation time.
- Authentic replications of wood, stone and abstract effects.
- Polyurethane reinforcement provides an excellent foundation for an ongoing cleaning regime, leading to maintenance cost savings.
- Conforms to EN 649 / EN ISO 10582.



## SPECIFICATIONS

The R values shown denote a ramp test result, which is an ex-factory measure of slip resistance. For safety flooring with sustainable wet slip resistance, refer to Expona Control PUR or the Polysafe ranges.

 These items feature a bevelled edge.



**GAUGE:** 5.0mm, wear layer 0.7mm  
**AVAILABILITY:** Plank: sizes as shown

This product is a highly realistic replication of natural materials. Hence, on many designs, natural variations in texture and colour will be present.



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.







# NEW Expona SimpLay PUR

LOOSE LAY VINYL FLOOR TILES AND PLANKS







## STONE

	
<b>Champagne Limestone 2542</b> 457.2 x 457.2mm	<b>Limed Concrete 2540</b> 457.2 x 457.2mm
	
<b>Grey Sandstone 2561</b> 457.2 x 457.2mm	<b>Light Grey Concrete 2567</b> 600 x 600mm
	
<b>Warm Grey Concrete 2568</b> 600 x 600mm	<b>Cold Grey Concrete 2566</b> 600 x 600mm
	
<b>Dark Grey Concrete 2569</b> 600 x 600mm	<b>Black Concrete 2541</b> 457.2 x 457.2mm

	
<b>Jerusalem Limestone 2543</b> 457.2 x 457.2mm	<b>Cathedral Limestone 2544</b> 457.2 x 457.2mm
	
<b>Ground Limestone 2545</b> 457.2 x 457.2mm	<b>Slate 2560</b> 457.2 x 457.2mm



## EFFECT

	
<b>Porcelain Weave 2546</b> 457.2 x 457.2mm	<b>Charcoal Weave 2547</b> 457.2 x 457.2mm
	
<b>Brown Leather 2564</b> 457.2 x 457.2mm	<b>Dark Grey Leather 2565</b> 457.2 x 457.2mm

## KEY FEATURES

A collection of heavy commercial loose lay tiles and planks designed to reduce installation time.


Authentic replications of wood, stone and abstract effects.

Polyurethane reinforcement provides an excellent foundation for an ongoing cleaning regime, leading to maintenance cost savings.

Conforms to EN 649 / EN ISO 10582.



The R values shown denote a ramp test result, which is an ex-factory measure of slip resistance. For safety flooring with sustainable wet slip resistance, refer to Expona Control PUR or the Polysafe ranges.

 These items feature a bevelled edge.

## SPECIFICATIONS



**GAUGE:** 5.0mm, wear layer 0.7mm  
**AVAILABILITY:** Tile: sizes as shown

This product is a highly realistic replication of natural materials. Hence, on many designs, natural variations in texture and colour will be present.



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

# Bevel Line PUR

COLLECTION OF BEVELLED WOOD AND STONE DESIGNS DEVELOPED FOR VERY HEAVY COMMERCIAL PROJECTS



## WOOD




Grey Ash 1998  
101 x 914mm




Smoked Chestnut 1999  
101 x 914mm




Maple 1972  
101 x 914mm




Beech 1973  
101 x 914mm




American Oak 1974  
101 x 914mm




Light Oak 1971  
101 x 914mm




Rich Oak 1975  
101 x 914mm



French Nut Tree 1976  
101 x 914mm



Merbau 1977  
101 x 914mm



Mahogany 1978  
101 x 914mm

## KEY FEATURES

Luxury vinyl tile range featuring authentic and popular wood and stone designs.

Polyurethane reinforcement provides an excellent foundation for an ongoing cleaning regime, leading to maintenance cost savings.

Indoor Air Comfort GOLD - Eurofins certified product.

Conforms to EN 649 / EN ISO 10582.



\* Refer to BRE Global ratings on [www.greenbooklive.com](http://www.greenbooklive.com)


## STONE




Sandstone 1984  
457 x 457mm




Smoked Limestone 1985  
457 x 457mm




Ivory Stone 1980  
457 x 457mm




Portland Stone 1981  
457 x 457mm




Shellstone 1982  
457 x 457mm




Limestone 1983  
457 x 457mm




Brushed Concrete 1986  
457 x 457mm



Wet Concrete 1987  
457 x 457mm



Burnt Sandstone 1988  
457 x 457mm



Black Limestone 1989  
457 x 457mm

## SPECIFICATIONS

The R values shown denote a ramp test result, which is an ex-factory measure of slip resistance. For safety flooring with sustainable wet slip resistance, refer to Expona Control PUR or the Polysafe ranges.

These items feature a bevelled edge.



GAUGE: 2.5mm, wear layer 0.7mm  
AVAILABILITY: Tile & Plank: sizes as shown



This product is a highly realistic replication of natural materials. Hence, on many designs, natural variations in texture and colour will be present.

Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

# Camaro PUR

A COLLECTION OF HIGH-DESIGN WOOD EFFECT PLANKS AND REALISTIC STONE, SLATE AND MARBLE DESIGNS TILES FOR LIGHT COMMERCIAL AND RESIDENTIAL APPLICATIONS




## WOOD




## KEY FEATURES

Luxury vinyl plank and tile collection featuring creative and authentic wood and stone designs. Accurate timber variation, grain and knots are sympathetically represented. Polyurethane reinforcement provides an excellent foundation for an ongoing cleaning regime, leading to maintenance cost savings. Indoor Air Comfort GOLD - Eurofins certified product. Conforms to EN 649/EN ISO 10582.



\* Refer to BRE Global ratings on [www.greenbooklive.com](http://www.greenbooklive.com)

## STONE

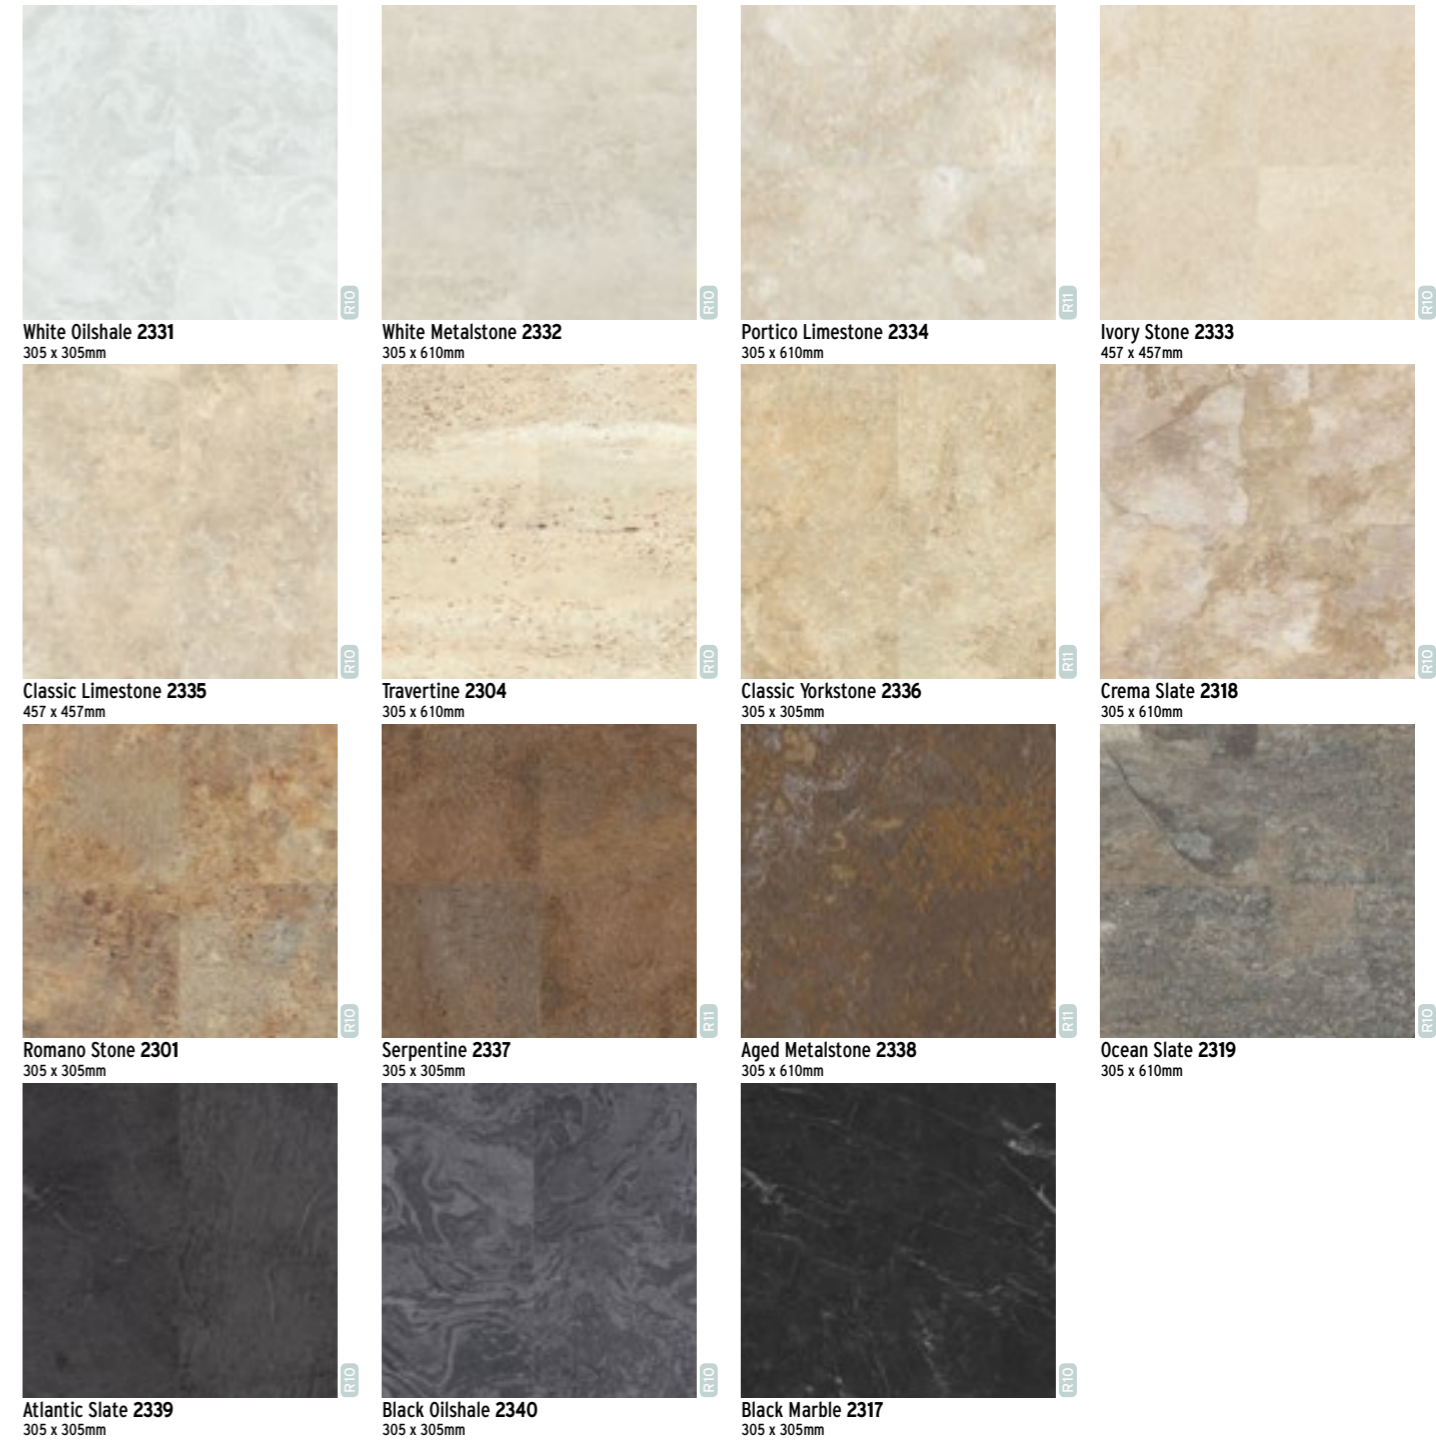

The R values shown denote a ramp test result, which is an ex-factory measure of slip resistance. For safety flooring with sustainable wet slip resistance, refer to Expona Control PUR or the Polysafe ranges.

## SPECIFICATIONS




**GAUGE:** 2.0mm, wear layer 0.3mm  
**AVAILABILITY:** Tile & Plank: sizes as shown



This product is a highly realistic replication of natural materials. Hence, on many designs, natural variations in texture and colour will be present.

# Camaro Loc PU

A COLLECTION OF HIGH-DESIGN WOOD EFFECT PLANKS AND REALISTIC STONE TILES, FOR LIGHT COMMERCIAL AND RESIDENTIAL APPLICATIONS

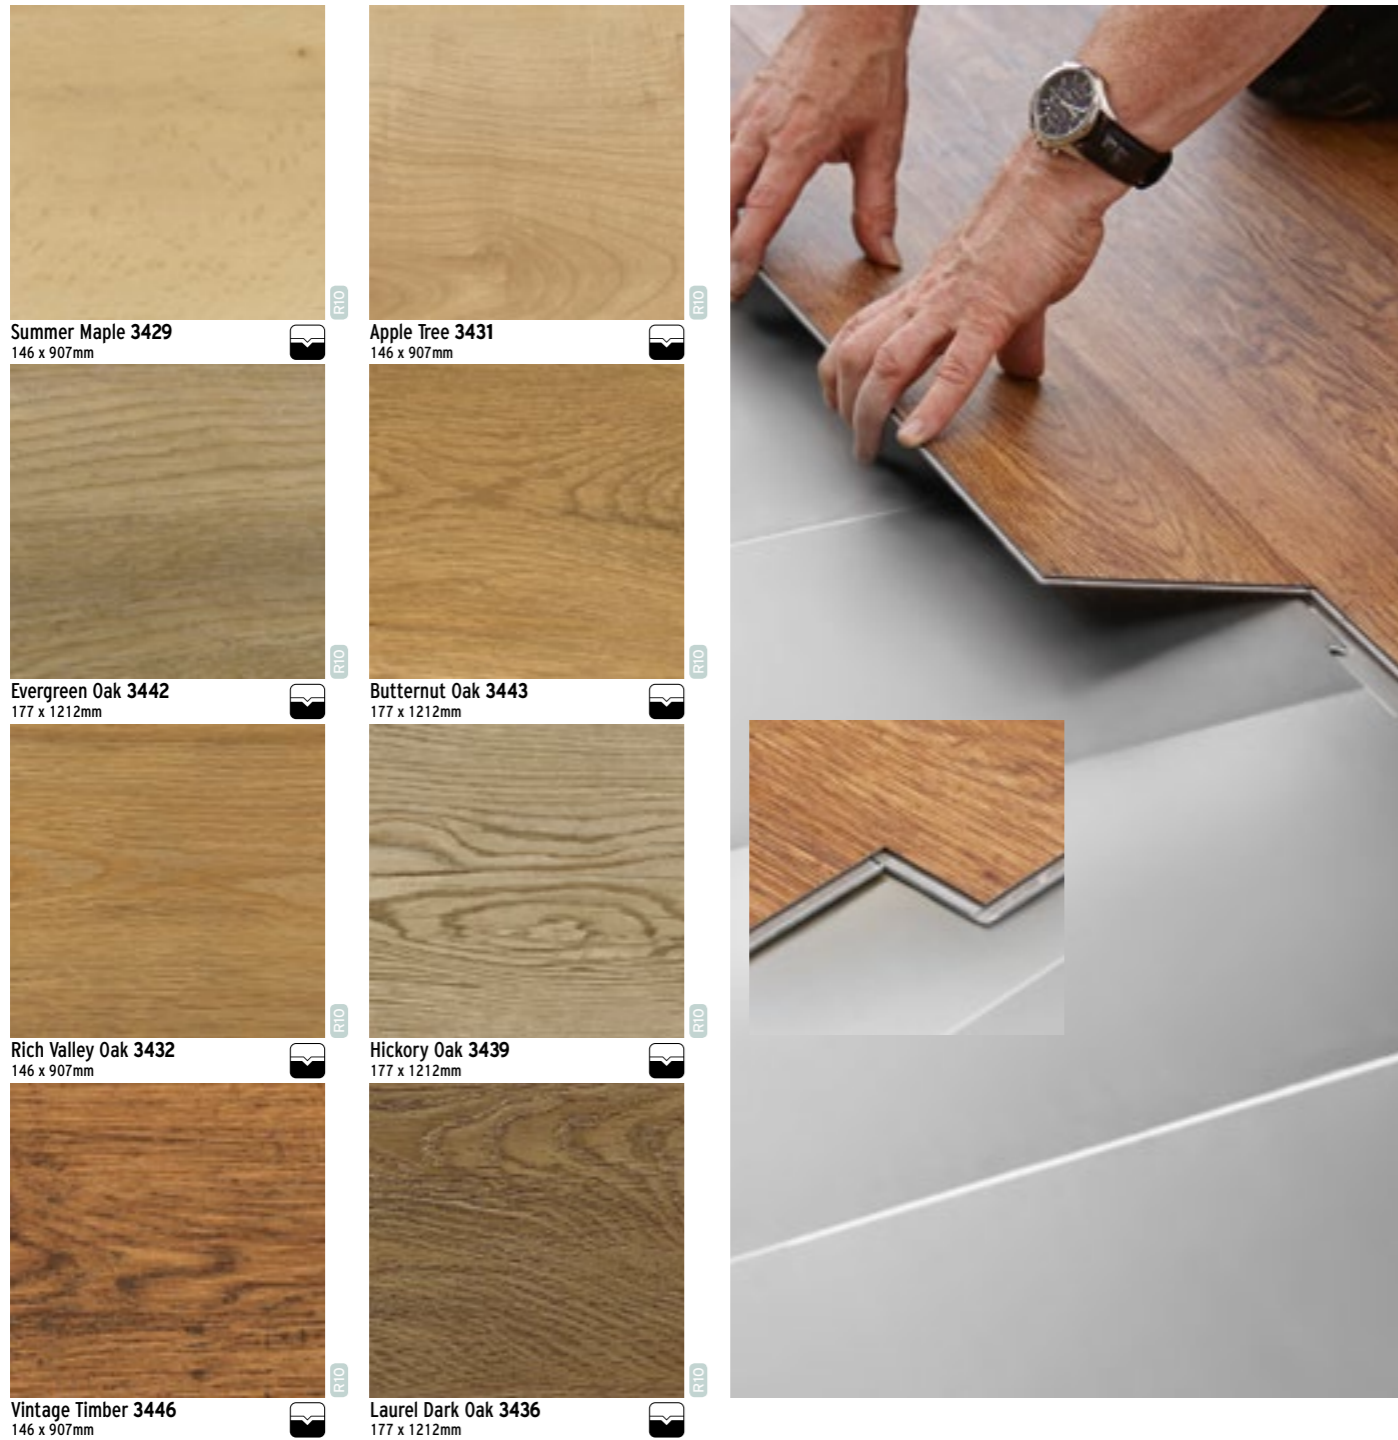


## KEY FEATURES

- Luxury Interlocking Vinyl plank and tile flooring, featuring authentically replicated wood and stone designs.
- Accurate timber variation with grain and knots represented in each wood design.
- Polyurethane surface treatment provides an excellent foundation for an ongoing cleaning regime, leading to maintenance cost savings.
- Vinyl Loc Underlay is recommended when installing.
- Indoor Air Comfort Gold - Eurofins certified product.
- Conforms to EN 649 / EN ISO 10582.



† Refer to BRE Global ratings on [www.thegreenguide.org.uk](http://www.thegreenguide.org.uk)

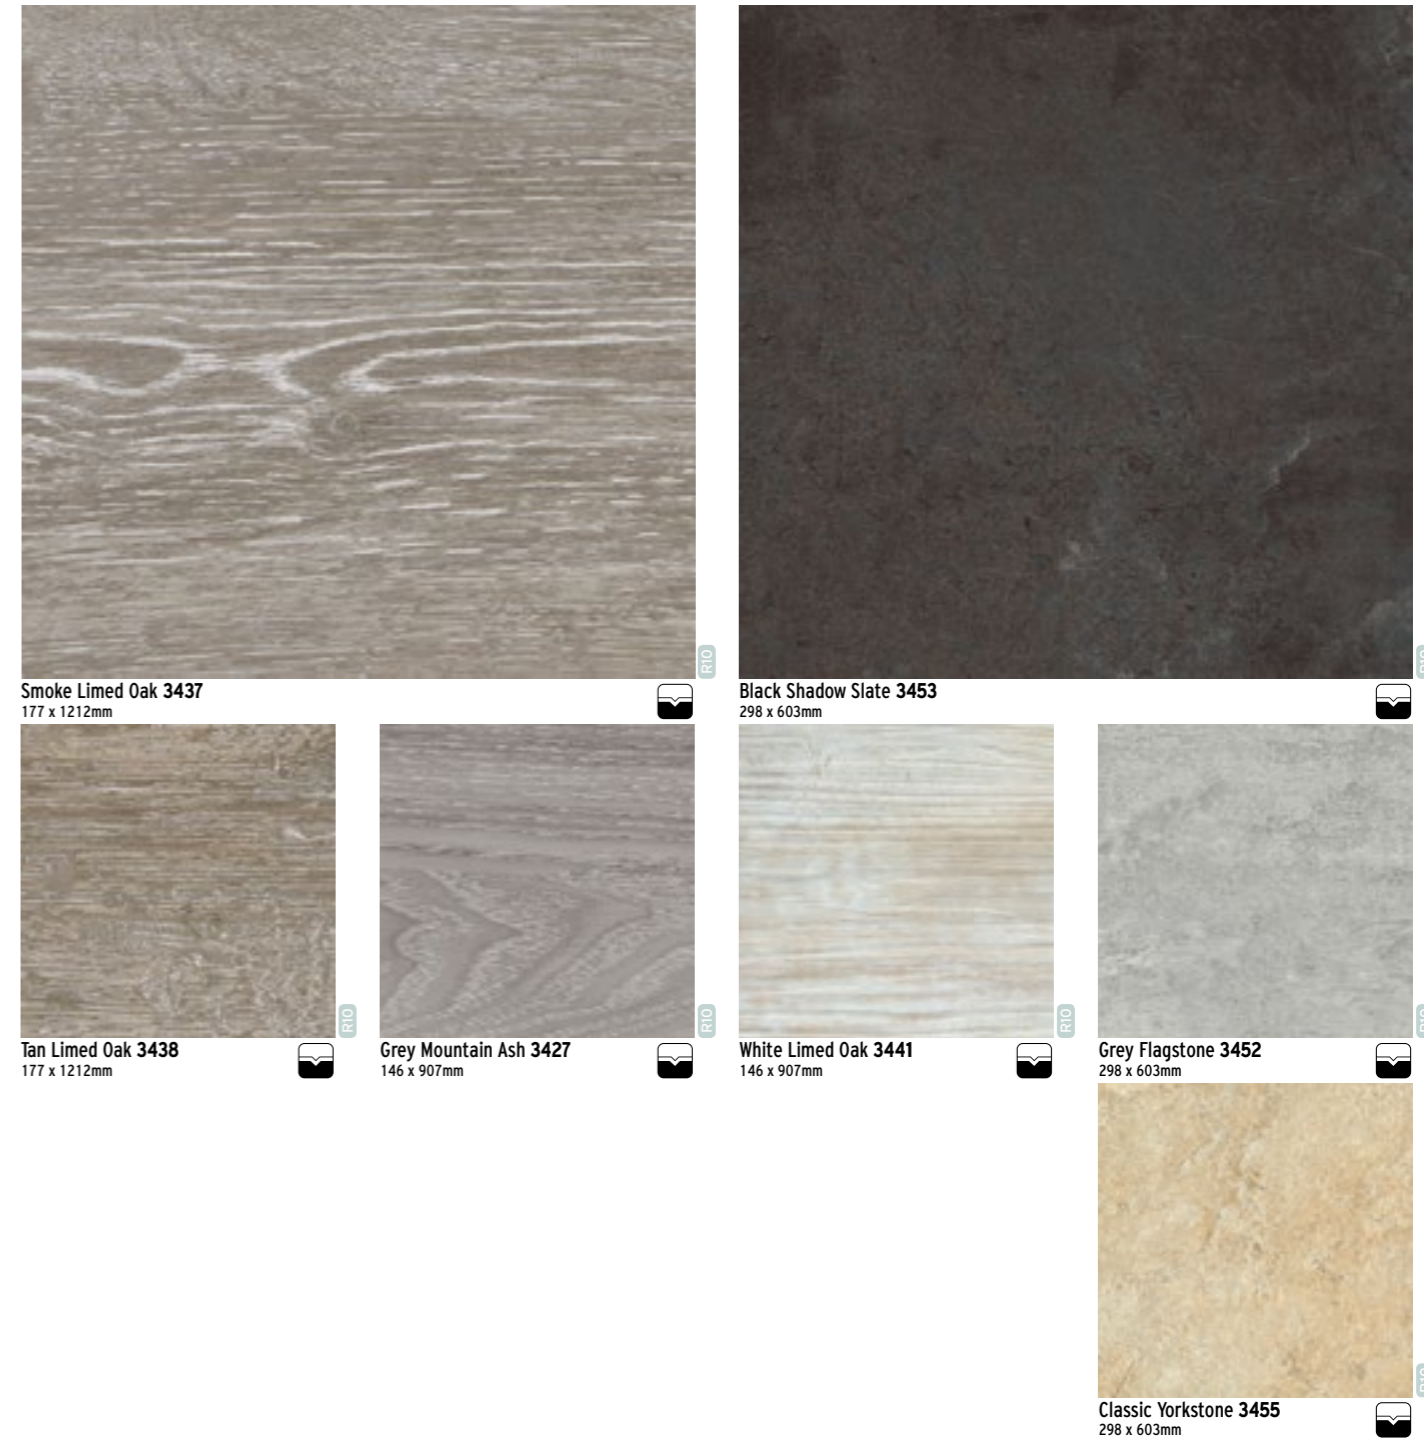

## SPECIFICATIONS

The **R10** values shown denote a ramp test result, which is an ex-factory measure of slip resistance. For safety flooring with sustainable wet slip resistance, refer to Expona Control PUR or the Polysafe ranges.

These items feature a bevelled edge.



**GAUGE:** 4.0mm, wear layer 0.3mm  
**AVAILABILITY:** Tile and Plank: sizes as shown



This product is a highly realistic replication of natural materials. Hence, on many designs, natural variations in texture and colour will be present.


Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

# NEW Affinity2<sup>55</sup> PUR

A COLLECTION OF HIGH DESIGN LUXURY VINYL TILES DEVELOPED FOR HEAVY TRAFFIC ENVIRONMENTS



**Aspen Pine 9870**  
184.2 x 1219.2mm R10



**Cracked White Oak 9871**  
184.2 x 1219.2mm R10



**Planed White Oak 9872**  
184.2 x 1219.2mm R10



**French Limed Oak 9873**  
184.2 x 1219.2mm R10



**Reclaimed Pine 9883**  
184.2 x 1219.2mm R10




**Dappled Oak 9875**  
184.2 x 1219.2mm R10



**Seasoned Grey Oak 9884**  
184.2 x 1219.2mm R10



**Jet Black Ash 9885**  
184.2 x 1219.2mm R10



**Champagne Oak 9874**  
184.2 x 1219.2mm R10




**Harvest Oak 9876**  
184.2 x 1219.2mm R10



**Saw Mill Oak 9877**  
184.2 x 1219.2mm R10




**Cross Sawn Timber 9878**  
184.2 x 1219.2mm R10



**Hazel Oak 9879**  
184.2 x 1219.2mm R10




**Flamed Chestnut 9881**  
184.2 x 1219.2mm R10



**Smoked Walnut 9880**  
184.2 x 1219.2mm R10



**Huckleberry Oak 9882**  
184.2 x 1219.2mm R10

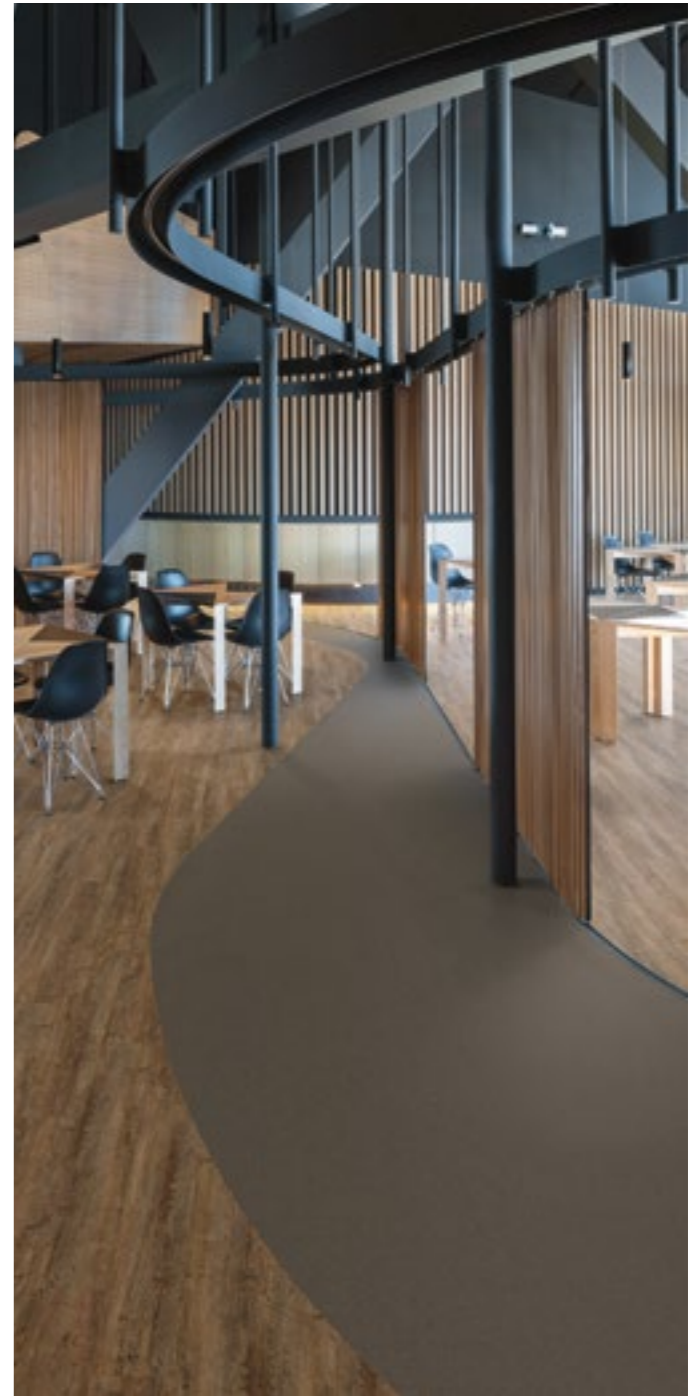


## KEY FEATURES

A collection of heavy commercial wood effect luxury vinyl tiles.

The innovative 2mm gauge allows Affinity2<sup>55</sup> to be installed alongside vinyl sheet flooring.

Polyurethane reinforcement provides an excellent foundation for an ongoing cleaning regime, leading to maintenance cost savings.

Conforms to EN 649/EN ISO 10582.



\* Refer to BRE Global ratings on [www.greenbooklive.com](http://www.greenbooklive.com)

## SPECIFICATIONS

The R values shown denote a ramp test result, which is an ex-factory measure of slip resistance. For safety flooring with sustainable wet slip resistance, refer to Expona Control PUR or the Polysafe ranges.



**GAUGE:** 2.0mm, wear layer 0.55mm  
**AVAILABILITY:** Plank: size as shown

This product is a highly realistic replication of natural materials. Hence, on many designs, natural variations in texture and colour will be present.



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

# Colonia PUR

COLLECTION OF AUTHENTIC WOOD AND STONE DESIGNS FOR RESIDENTIAL APPLICATIONS



## WOOD



**English Oak 4435**  
152 x 1219mm



**Nordic White Oak 4436**  
184 x 1219mm




**New England Elm 4433**  
152 x 1219mm



**Schoolhouse Oak 4434**  
152 x 1219mm



**Oxford Maple 4431**  
152 x 914mm




**Golden Koa 4403**  
101 x 914mm



**Mountain Alder 4401**  
101 x 914mm



**Woodland Oak 4411**  
101 x 914mm



**Virginia Walnut 4432**  
152 x 914mm



**Kings Oak 4437**  
184 x 1219mm

## STONE



**Welsh Raven Slate 4535**  
305 x 610mm



**Natural Limestone 4536**  
457 x 457mm




**Fossil Limestone 4537**  
457 x 457mm



**Cottage Yorkstone 4531**  
305 x 305mm



**Balmoral Grey Slate 4534**  
305 x 610mm



**Glazed Metalstone 4533**  
305 x 610mm



**Quarried Millstone 4532**  
305 x 305mm

The R values shown denote a ramp test result, which is an ex-factory measure of slip resistance. For safety flooring with sustainable wet slip resistance, refer to Expona Control PUR or the Polysafe ranges.

## KEY FEATURES

Collection of luxury vinyl tiles inspired by natural wood and stone materials. Shades and textures can be combined to create stunning floor designs. Polyurethane reinforcement provides an excellent foundation for an ongoing cleaning regime, leading to maintenance cost savings. Indoor Air Comfort GOLD - Eurofins certified product. Conforms to EN 649/EN ISO 10582.

**100% RECYCLABLE**  
**40% RECYCLED MATERIAL**



## SPECIFICATIONS



**GAUGE:** 2.0mm, wear layer 0.2mm  
**AVAILABILITY:** Tile & Plank: sizes as shown

This product is a highly realistic replication of natural materials. Hence, on certain designs, natural variations in texture and colour, as well as markings such as knots, may be present.

# SD Collection


HARDWEARING VINYL FLOORCOVERINGS ENGINEERED FOR ELECTROSTATIC DISCHARGE PROTECTION



## Polyflor SD




**Ocean Blue 5050**




**Flaxen 5060**



**Steel Grey 5030**



**Golden Sand 5070**



**Teal 5080**



**Silver Grey 5110**

## Finesse SD




**Cascade 5800**




**Woodglade 5840**



**Daybreak 5820**



**Lodestone 5830**



**Moonscape 5860**



## KEY FEATURES

High-performance, homogeneous floorcoverings with static dissipative properties. Choice of marbleised or non-directional decoration. Conforms to a broad range of ESD standards. Conforms to EN 649 / EN ISO 10581.

**100% RECYCLABLE**  
**25% RECYCLED MATERIAL**

Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.



## SPECIFICATIONS




**GAUGE:** 2.0mm  
**AVAILABILITY:** Sheet: 2m x 20m  
Tile: 608 x 608mm

# EC Collection


HARDWEARING VINYL FLOORCOVERINGS ENGINEERED FOR ELECTROSTATIC DISCHARGE PROTECTION




## OHMega EC

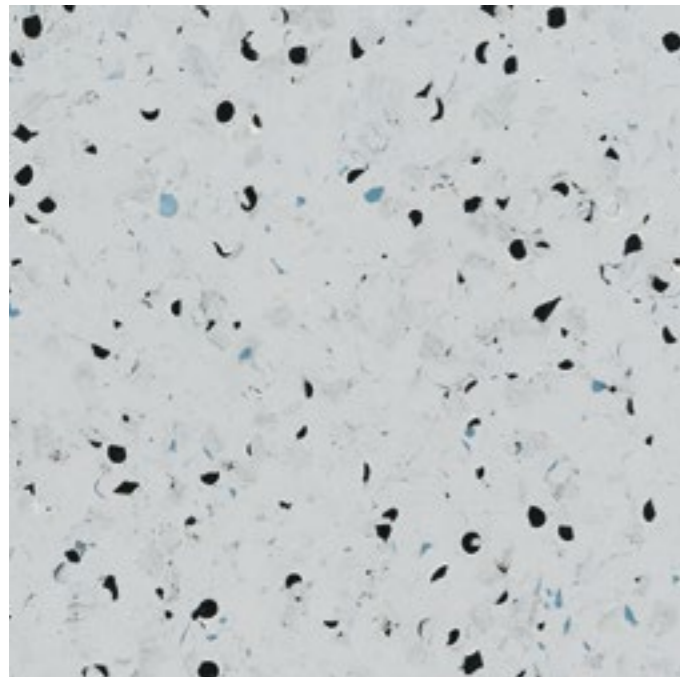


Morning Dew 6006




Frosty Glen 6005



Tempest 6004




Thunderstorm 6002



Warm Haze 6003

## Polyflor EC



Black/Grey 8990


## Conductive ROF



Black 5980

### KEY FEATURES

High-performance, homogeneous floorcoverings with electrostatic conductive properties. Conforms to a broad range of ESD standards. Conforms to EN 649 / EN ISO 10581. ROF option is intended for explosive handling areas. It does not offer protection from a short circuit on a 240/250 volt mains, so installation and switching in these rooms are critical and must be considered, prior to any handover.



† Refer to BRE Global ratings on [www.thegreenguide.org.uk](http://www.thegreenguide.org.uk)

### SPECIFICATIONS



**GAUGE:** 2.0mm  
**AVAILABILITY:** Sheet: 2m x 20m (OHMega EC & Conductive ROF)  
**Tile:** 608 x 608mm (Polyflor EC only)




# Polyclad Pro and Plus PU

TOUGH, DURABLE AND FLEXIBLE VINYL WALL AND CEILING CLADDING FEATURING THE PROTECTION OF A POLYURETHANE SURFACE TREATMENT

## Polyclad Pro PU



White Chalk 4093



Biscuit Beige 4092




Grey Steel 4095



Frosted Grey 4094



Blue Shingle 4097



Dusted Blue 4096

## Polyclad Plus PU



Summer Sky 2830



Frosted Cream 2800



Polar Ice 2840



Spring Fern 2810



Nimbus Grey 2710




Dove White 2700

\* For a floor to wall solution, consider the combination of Polyclad Pro with complementary Polysafe Hydro Evolve colours. See page 23.

### KEY FEATURES

Wall and ceiling cladding sheet featuring a subtle marbled decoration. Polyurethane surface treatment provides benefits in terms of hygiene and ease of maintenance. Designed to be welded to Polyflor floorcoverings, to provide a floor-to-wall surface that provides an excellent barrier to dirt and infection. Ideal for wet and hygiene-critical areas.



Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.



### SPECIFICATIONS

**GAUGE:** Polyclad Pro PU 1.25mm  
 Polyclad Plus PU 2.0mm  
**AVAILABILITY:** Sheet: 1.83 x 30m (1.25mm)  
 2m x 20m (2.0mm)

# Polyflor Sport

HARDWEARING VINYL SPORTSFLOOR DESIGNED FOR USE IN 'MULTI-PURPOSE' INDOOR SPORTS ARENAS



NCS S 3030-Y20R  
WR 7516



**Maple 7516**  
plank w/l: 100 x 1000mm


NCS S 5030-G10Y  
WR 7515



**Green 7515**

NCS S 5030-R90B  
WR 7512

**Blue 7512**

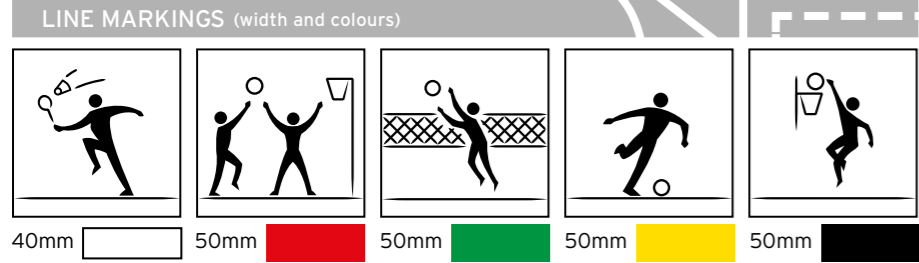

## KEY FEATURES

- High performance vinyl sheet sports flooring conforming to EN 14904.
- Designed to perform safely and effectively in 'multi-purpose' indoor sports venues.
- Suitable for basketball, netball, volleyball, gymnastics, badminton, handball, indoor football, martial arts and others.

## SPECIFICATIONS

**GAUGE:** 6.7mm  
**AVAILABILITY:** Sheet: 2m x 18.5m




Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.




# Diamant

COMMERCIAL RUBBER SHEET FLOORING




**Almond 206**

NCS S 2005-Y20R



**Cotton 313**

NCS S 1515-Y20R




**Sea Salt 213**

NCS S 3005-B80G



**Lentil 408**

NCS S 400-G30Y




**Pepper 306**

NCS S 2020-Y30R



**Rice 203**

NCS S 4502-Y




**Blue Poppy 702**

NCS S 4020-B10G




**Water Melon 413**

NCS S 5030-G




**Raisin 307**

NCS S 4020-Y50R




**Mocha 205**

NCS S 6005-Y80R



**Water Lily 707**

NCS S 4020-B




**Apricot 607**

NCS S 3030-Y50R



**Mustard 503**

NCS S 2050-Y20R




**Molasses 210**

NCS S 6500-N



**Blue Vervain 713**

NCS S 6020-R80B



**Tomato 611**

NCS S 3050-Y70R

## KEY FEATURES

- Hardwearing rubber sheet floorcovering designed for heavy traffic commercial areas.
- Multi-coloured chip decoration with embossed surface finish.
- Inherent sound deadening properties and cigarette burn resistance.
- Conforms to EN 1817.

## SPECIFICATIONS



**GAUGE:** 2.0mm  
**AVAILABILITY:** Sheet: 1.9 x 15m




† Refer to BRE Global ratings on [www.thegreenguide.org.uk](http://www.thegreenguide.org.uk)





# Noppe Stud Tile

COMMERCIAL RUBBER STUD TILE

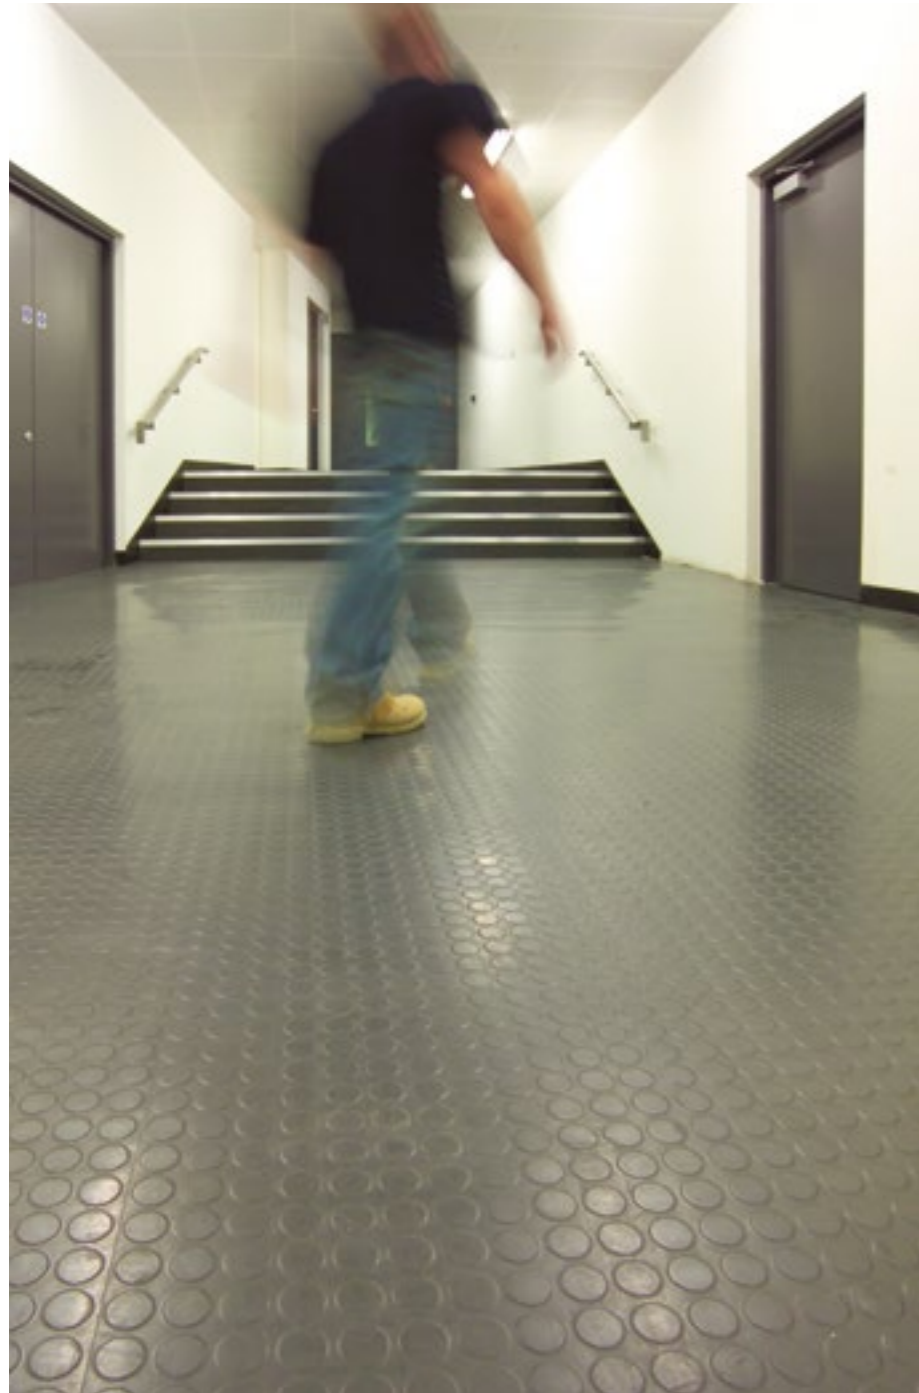

**Group 1**



Steel 014\*

NCS S 5502-G



Limestone Green 013\*

NCS S 5010-B70G



Green Baize 015

NCS S 6030-G10Y



Deep Blue 191\*

NCS S 7020-B



Anthracite 102\*

NCS S 8000-N



Black Coal 101\*

NCS S 8502-R

**Group 2**



Sandstone 140

NCS S 3020-Y20R



Orange 010

NCS S 2070-Y50R



Warm Red 012

NCS S 2070-Y90R



Mercury 129

NCS S 3005-B80G



Cool Blue 707\*

NCS S 5020-B



Cobalt 019

NCS S 7020-B80B

# Ejecta

ACCESSORIES DESIGNED FOR USE WITH POLYFLOR VINYL FLOORCOVERINGS




White 9520

NCS S 0502-Y50R




Light Fawn 9590

NCS S 2005-Y40R



Light Beige 9610

NCS S 2010-Y40R




Fawn 9580

NCS S 3005-Y50R




Light Grey 9550

NCS S 2502-B




Beige 9600

NCS S 2502-B



Cream 9630

NCS S 2000-Y10R




Green 9640

NCS S 5010-G70Y




Grey 9540

NCS S 4502-G




Russet 9620

NCS S 4030-Y70R



Brown 9560

NCS S 5020-Y20R



Blue 9650

NCS S 3020-B




Dark Grey 9530

NCS S 5005-R80B



Dark Brown 9570

NCS S 7010-Y90R



Black 9510


NCS S 8000-N



**KEY FEATURES**

- Hard wearing commercial rubber floor tile.
- Low-profile studded surface.
- Conforms to EN 12199.
- Resistant to cigarette burns.

**SPECIFICATIONS**



**GAUGE:** 3.0mm, 4.0mm  
**AVAILABILITY:** Tile: 500 x 500mm


All shades are available in 3.0mm.  
\*Also available in 4.0mm



† Refer to BRE Global ratings on www.thegreenguide.org.uk

PRODUCT	CODE	GAUGE/SIZE	UNIT LENGTH	STANDARD PACK	EX-STOCK COLOURS
SIT-ON COVING	MC8	20 x 100 mm	2 m	20 x 2 m	15 colours
	MC14	20 x 75 mm	2 m	20 x 2 m	15 colours
SET-IN COVING	MC18	50 x 100 mm	2 m	20 x 2 m	15 colours
	MC8c SIT-ON	20 x 100 mm	20 m	2 x 20 m coil*	15 colours
COILED SKIRTING	MC18c SET-IN	50 x 100 mm	20 m	2 x 20 m coil*	15 colours
	COVE FORMER	CF 20mm	20 x 20 mm	2 m	30 x 2 m
CF 38mm		38 x 38 mm	2 m	15 x 2 m	Black only
CAPPING STRIP	CS-N	40 mm	2 m	40 x 2 m	15 colours
	CS-NC	40 mm	20 m coil	20 m coil*	15 colours
	CS	20 mm	20 m coil	20 m coil*	Black only
	CT	41 mm	2 m	50 x 2 m	White only
CORNER CAP	EFA 75	75 x 75 mm	2 m	10 x 2 m	Black only
WELDING ROD	Colours to match vinyl sheet flooring	100 m coil	100 m coil*		

Special colours subject to a minimum order of 500 linear metres (excludes CS, CT, EFA 75, CF) \*Supplied in standard packs only

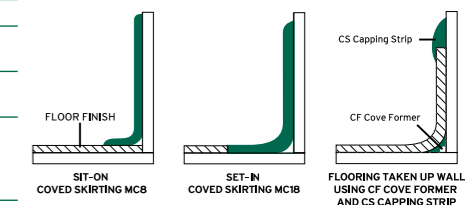

Please note: due to limitations of colour printing, actual samples should be seen before colour selection is made.

# Light Reflectance Values

PRODUCT	SHADE NO	SHADE	LRV	PRODUCT	SHADE NO	SHADE	LRV	PRODUCT	SHADE NO	SHADE	LRV
2000 PUR	8000	Brushed Ochre	22.6	Bevel Line Stone PUR	1985	Smoked Limestone	51.5	Classic Mystique PUR	1230	Wild Mint	43.6
2000 PUR	8050	Stream	35.0	Bevel Line Stone PUR	1986	Brushed Concrete	45.9	Classic Mystique PUR	1240	Cornbrook	52.4
2000 PUR	8150	Shadow	12.1	Bevel Line Stone PUR	1987	Wet Concrete	34.6	Classic Mystique PUR	1250	Coral Drift	19.3
2000 PUR	8230	Stonewall	29.4	Bevel Line Stone PUR	1988	Burnt Sandstone	16.9	Classic Mystique PUR	1260	Sunblaze	13.5
2000 PUR	8300	Oak	54.1	Bevel Line Stone PUR	1989	Black Limestone	13.7	Classic Mystique PUR	1320	Asparagus	37.3
2000 PUR	8350	Larkspur	26.9	Bevel Line Wood PUR	1971	Light Oak	36.8	Classic Mystique PUR	1330	Mountain Lake	28.1
2000 PUR	8380	Willowbank	29.4	Bevel Line Wood PUR	1972	Maple	38.0	Classic Mystique PUR	1370	Satinwood	55.2
2000 PUR	8400	Sequoia	16.3	Bevel Line Wood PUR	1973	Beech	31.4	Classic Mystique PUR	1380	Nocturne	12.9
2000 PUR	8450	Glacier Blue	42.4	Bevel Line Wood PUR	1974	American Oak	31.8	Classic Mystique PUR	1400	Quartz	50.3
2000 PUR	8490	Saffron	40.8	Bevel Line Wood PUR	1975	Rich Oak	18.6	Classic Mystique PUR	1410	Ladoga	46.1
2000 PUR	8500	Lace Blue	47.0	Bevel Line Wood PUR	1976	French Nut Tree	17.4	Classic Mystique PUR	1430	Silver Mist	61.8
2000 PUR	8550	Sapphire	21.1	Bevel Line Wood PUR	1977	Merbau	8.1	Classic Mystique PUR	1460	Shoreline	54.9
2000 PUR	8600	Thistle	18.2	Bevel Line Wood PUR	1978	Mahogany	7.6				
2000 PUR	8650	Wild Lilac	51.2	Bevel Line Wood PUR	1998	Grey Ash	27.8	Colonia Stone PUR	4515	Imperial Black Marble	5.3
2000 PUR	8700	Mint Crest	44.8	Bevel Line Wood PUR	1999	Smoked Chestnut	14.1	Colonia Stone PUR	4531	Cottage Yorkstone	48.4
2000 PUR	8750	Glenbeck	23.7					Colonia Stone PUR	4532	Quarried Millstone	15.4
2000 PUR	8800	Dawn Mist	60.0	Camaro Stone & Design PUR	2301	Romano Stone	26.5	Colonia Stone PUR	4533	Glazed Metalstone	34.7
2000 PUR	8850	Buckwheat	39.2	Camaro Stone & Design PUR	2304	Travertine	39.4	Colonia Stone PUR	4534	Balmoral Grey Stone	39.9
2000 PUR	8900	Blossom	51.5	Camaro Stone & Design PUR	2317	Black Marble	7.2	Colonia Stone PUR	4535	Weish Raven Slate	7.3
2000 PUR	8950	Rosehip	36.8	Camaro Stone & Design PUR	2318	Cream Slate	44.5	Colonia Stone PUR	4536	Natural Limestone	53.6
				Camaro Stone & Design PUR	2319	Ocean Slate	23.0	Colonia Stone PUR	4537	Fossil Limestone	39.9
Acoustix Forest fx	3095	Oiled Oak	34.8	Camaro Stone & Design PUR	2331	White Oilshale	67.2	Colonia Wood PUR	4401	Mountain Alder	26.3
Acoustix Forest fx	3125	Classic Oak	29.6	Camaro Stone & Design PUR	2332	White Metalstone	56.6	Colonia Wood PUR	4403	Golden Koa	27.0
Acoustix Forest fx	3155	Smoked Oak	14.2	Camaro Stone & Design PUR	2333	Ivory Stone	54.3	Colonia Wood PUR	4411	Woodland Oak	19.4
Acoustix Forest fx	3235	Classic Walnut	13.4	Camaro Stone & Design PUR	2334	Portico Limestone	54.4	Colonia Wood PUR	4431	Oxford Maple	28.3
Acoustix Forest fx	3295	Warm Beech	34.0	Camaro Stone & Design PUR	2335	Classic Limestone	51.6	Colonia Wood PUR	4432	Virginia Walnut	13.2
Acoustix Forest fx	3335	Rustic Oak	25.1	Camaro Stone & Design PUR	2336	Classic Yorkstone	46.2	Colonia Wood PUR	4433	New England Elm	50.7
Acoustix Forest fx	3345	European Oak	20.3	Camaro Stone & Design PUR	2337	Sepentine	15.5	Colonia Wood PUR	4434	Schoolhouse Oak	26.9
Acoustix Forest fx	3385	American Oak	33.2	Camaro Stone & Design PUR	2338	Aged Metalstone	14.5	Colonia Wood PUR	4435	English Oak	30.6
				Camaro Stone & Design PUR	2339	Atlantic Slate	8.3	Colonia Wood PUR	4436	Nordic White Oak	53.7
Acoustix Gallery fx	6815	American Oak	34.7	Camaro Stone & Design PUR	2340	Black Oilshale	13.1	Colonia Wood PUR	4437	Kings Oak	8.7
Acoustix Gallery fx	6835	European Oak	23.6	Camaro Wood PUR	2202	Nut Tree	29.3				
Acoustix Gallery fx	6836	Rustic Oak	29.2	Camaro Wood PUR	2206	Waxed Pine	31.6	Designatex PUR	2136	Laurel Oak Parquet	33.3
Acoustix Gallery fx	6837	Vermont Maple	34.7	Camaro Wood PUR	2216	Classic Oak	15.1	Designatex PUR	2137	English Oak Parquet	19.2
Acoustix Gallery fx	6838	Stained Maple	12.0	Camaro Wood PUR	2217	American Oak	33.6	Designatex PUR	2138	Rich Oak Parquet	15.0
Acoustix Gallery fx	6840	Mercury	48.3	Camaro Wood PUR	2220	Vintage Timber	16.7	Designatex PUR	2139	Smokehouse Herringbone	17.3
Acoustix Gallery fx	6841	Zinc	37.2	Camaro Wood PUR	2229	White Limed Oak	50.2	Designatex PUR	2140	Columned Ash	24.5
Acoustix Gallery fx	6842	Onyx	13.7	Camaro Wood PUR	2231	Ambrosia Maple	37.4	Designatex PUR	2141	Chalk White Oak	57.2
Acoustix Gallery fx	6843	Silica Sand	53.0	Camaro Wood PUR	2232	Natural Oak	22.0	Designatex PUR	2142	Platinum Oak	31.7
Acoustix Gallery fx	6844	Mica Sand	39.3	Camaro Wood PUR	2233	Smoke Brushed Elm	24.6	Designatex PUR	2143	Honey Limed Ash	41.2
Acoustix Gallery fx	6845	Earth	28.2	Camaro Wood PUR	2234	Figured Pine	13.7	Designatex PUR	2144	Nero Oak	6.6
Acoustix Gallery fx	6846	Euclase Green	45.1	Camaro Wood PUR	2235	Warwick Oak	14.7	Designatex PUR	2145	California Oak	40.7
Acoustix Gallery fx	6847	Celestine Blue	40.7	Camaro Wood PUR	2236	North American Walnut	8.9	Designatex PUR	2146	Cornish Oak	27.9
Acoustix Gallery fx	6848	Lazulite Blue	15.4	Camaro Wood PUR	2237	Roasted Oak	7.2	Designatex PUR	2147	Sicilian Oak	28.0
				Camaro Wood PUR	2238	Country Teak	9.2	Designatex PUR	2148	Cottage Paving	38.9
				Camaro Wood PUR	2239	Heritage Oak	7.5	Designatex PUR	2149	Tuscan Paving	21.2
Affinity <sup>255</sup> PUR	9870	Aspen Pine	49.9					Designatex PUR	2150	Barca Limestone	49.8
Affinity <sup>255</sup> PUR	9871	Cracked White Oak	44.5	Camaro Loc PU	3427	Grey Mountain Ash	32.4	Designatex PUR	2151	Manhattan Limestone	47.9
Affinity <sup>255</sup> PUR	9872	Planed White Oak	46.3	Camaro Loc PU	3429	Summer Maple	34.6	Designatex PUR	2152	Quarried Slate	26.6
Affinity <sup>255</sup> PUR	9873	French Limed Oak	37.2	Camaro Loc PU	3431	Apple Tree	36.1	Designatex PUR	2153	Noir Slate	7.6
Affinity <sup>255</sup> PUR	9874	Champagne Oak	42.1	Camaro Loc PU	3432	Rich Valley Oak	26.4				
Affinity <sup>255</sup> PUR	9875	Dappled Oak	28.8	Camaro Loc PU	3436	Laurel Dark Oak	14.3	EC	8990	Black	8.4
Affinity <sup>255</sup> PUR	9876	Harvest Oak	27.8	Camaro Loc PU	3437	Smoke Limed Oak	28.3				
Affinity <sup>255</sup> PUR	9877	Saw Mill Oak	27.8	Camaro Loc PU	3438	Tan Limed Oak	19.6				
Affinity <sup>255</sup> PUR	9878	Cross Sawn Timber	29.0	Camaro Loc PU	3439	Hickory Oak	30.4	Ecomax	4621	Cassia	41.1
Affinity <sup>255</sup> PUR	9879	Hazel Oak	21.1	Camaro Loc PU	3441	White Limed Oak	50.2	Ecomax	4622	Allspice	36.5
Affinity <sup>255</sup> PUR	9880	Smoked Walnut	17.7	Camaro Loc PU	3442	Evergreen Oak	24.4	Ecomax	4623	Caraway	29.6
Affinity <sup>255</sup> PUR	9881	Flamed Chestnut	15.1	Camaro Loc PU	3443	Butternut Oak	20.6	Ecomax	4624	Mace	25.5
Affinity <sup>255</sup> PUR	9882	Huckleberry Oak	13.2	Camaro Loc PU	3446	Vintage Timber	16.7	Ecomax	4625	Chicory	36.5
Affinity <sup>255</sup> PUR	9883	Reclaimed Pine	25.1	Camaro Loc PU	3452	Grey Flagstone	42.7	Ecomax	4626	Tuscan Blue	22.1
Affinity <sup>255</sup> PUR	9884	Seasoned Grey Oak	27.4	Camaro Loc PU	3453	Black Shadow Slate	12.0	Ecomax	4627	Starflower	19.7
Affinity <sup>255</sup> PUR	9885	Jet Black Ash	6.0	Camaro Loc PU	3455	Classic Yorkstone	46.2	Ecomax	4628	Apple Mint	30.7
								Ecomax	4629	Iris	37.1
Bevel Line Stone PUR	1980	Ivory Stone	53.6					Ecomax	4631	Santolina	41.1
Bevel Line Stone PUR	1981	Portland Stone	51.4	Classic Mystique PUR	1160	Smokestone	28.4	Ecomax	4632	Anise Grey	25.4
Bevel Line Stone PUR	1982	Shellstone	45.8	Classic Mystique PUR	1200	Pale Slate	47.0	Ecomax	4633	Blackseed	5.6
Bevel Line Stone PUR	1983	Limestone	47.7								
Bevel Line Stone PUR	1984	Sandstone	56.7	Classic Mystique PUR	1210	Cloudburst	31.8				
				Classic Mystique PUR	1220	Delta Blue	11.0	Ejecta Accessories	9510	Black	4.3

# Light Reflectance Values

PRODUCT	SHADE NO	SHADE	LRV	PRODUCT	SHADE NO	SHADE	LRV	PRODUCT	SHADE NO	SHADE	LRV
Ejecta Accessories	9520	White	79.2	Expona Commercial Stone PUR	5076	Crème Matrix	37.3	Expona Flow Wood PUR	9838	Golden Pine	24.7
Ejecta Accessories	9530	Dark Grey	23.0	Expona Commercial Stone PUR	5077	Black Textile	15.6	Expona Flow Wood PUR	9839	Blond Pine	37.3
Ejecta Accessories	9540	Grey	28.6	Expona Commercial Stone PUR	5078	Nature Textile	22.2	Expona Flow Cosmos PUR	9840	Oatmeal	43.4
Ejecta Accessories	9550	Light Grey	46.5	Expona Commercial Wood PUR	1902	Classic Oak	26.7	Expona Flow Cosmos PUR	9841	Moleskin	27.8
Ejecta Accessories	9560	Brown	23.6	Expona Commercial Wood PUR	1907	Nut Tree	28.2	Expona Flow Cosmos PUR	9842	Jet	7.9
Ejecta Accessories	9570	Dark Brown	8.1	Expona Commercial Wood PUR	1969	Indian Ebony	11.1	Expona Flow Cosmos PUR	9843	Taupe	9.5
Ejecta Accessories	9580	Fawn	37.0	Expona Commercial Wood PUR	4019	Weathered Country Plank	12.7	Expona Flow Cosmos PUR	9844	Luna	47.5
Ejecta Accessories	9590	Light Fawn	53.3	Expona Commercial Wood PUR	4020	Grey Ash	27.5	Expona Flow Cosmos PUR	9845	Storm	26.4
Ejecta Accessories	9600	Beige	28.5	Expona Commercial Wood PUR	4022	Honey Ash	24.6	Expona Flow Cosmos PUR	9846	Mulberry	12.5
Ejecta Accessories	9610	Light Beige	41.7	Expona Commercial Wood PUR	4036	Aged Elm	8.6	Expona Flow Cosmos PUR	9847	Plum	8.9
Ejecta Accessories	9620	Russet	17.9	Expona Commercial Wood PUR	4059	American Oak	32.4	Expona Flow Cosmos PUR	9848	Burnt Orange	24.0
Ejecta Accessories	9630	Cream	43.5	Expona Commercial Wood PUR	4061	Light Pine	31.4	Expona Flow Cosmos PUR	9849	Flaxen	43.9
Ejecta Accessories	9640	Green	22.5	Expona Commercial Wood PUR	4062	Graphite Pine	11.3	Expona Flow Cosmos PUR	9850	Meadow	31.7
Ejecta Accessories	9650	Blue	28.9	Expona Commercial Wood PUR	4063	Grey Pine	20.8	Expona Flow Cosmos PUR	9851	Teal	11.0
				Expona Commercial Wood PUR	4065	Brown Heritage Cherry	8.4	Expona Flow Cosmos PUR	9852	Steel Blue	9.9
Expona Design Wood PUR	6138	Classic Oak	21.6	Expona Commercial Wood PUR	4066	Red Heritage Cherry	13.2	Expona Flow Cosmos PUR	9853	Woodland	11.4
Expona Design Wood PUR	6139	American Oak	32.4	Expona Commercial Wood PUR	4067	Dark Recycled Wood	*	Expona Flow Cosmos PUR	9854	Midnight	10.2
Expona Design Wood PUR	6146	Silvered Driftwood	18.6	Expona Commercial Wood PUR	4068	Blue Recycled Wood	*	Expona Flow Concrete PUR	9855	Warm Concrete	25.0
Expona Design Wood PUR	6149	Antique Oak	16.1	Expona Commercial Wood PUR	4069	Beige Varnished Wood	35.1	Expona Flow Concrete PUR	9856	Cool Concrete	21.9
Expona Design Wood PUR	6151	Blond Country Plank	34.3	Expona Commercial Wood PUR	4070	Blue Varnished Wood	26.1	Expona Flow Concrete PUR	9857	Dark Grey Concrete	12.8
Expona Design Wood PUR	6155	Walnut	11.4	Expona Commercial Wood PUR	4071	Light Varnished Wood	35.6	Expona Flow Concrete PUR	9858	Light Grey Concrete	40.2
Expona Design Wood PUR	6173	Blond Indian Apple	34.1	Expona Commercial Wood PUR	4072	Brown Weathered Spruce	14.9	Expona Flow Concrete PUR	9859	Dark Industrial Concrete	24.1
Expona Design Wood PUR	6174	Aged Indian Apple	16.0	Expona Commercial Wood PUR	4073	Blue Weathered Spruce	19.8	Expona Flow Concrete PUR	9860	Light Industrial Concrete	35.1
Expona Design Wood PUR	6178	Dark Brushed Oak	9.9	Expona Commercial Wood PUR	4074	Beige Weathered Spruce	22.5	Expona Flow Concrete PUR	9861	Copper Ornamental	18.8
Expona Design Wood PUR	6179	Natural Brushed Oak	23.0	Expona Commercial Wood PUR	4081	Blond Limed Oak	33.9	Expona Flow Concrete PUR	9862	Onyx Ornamental	11.0
Expona Design Wood PUR	6182	Light Elm	25.4	Expona Commercial Wood PUR	4082	Grey Limed Oak	24.9	Expona Flow Infinity PUR	9863	Auburn	17.1
Expona Design Wood PUR	6183	Black Elm	9.4	Expona Commercial Wood PUR	4083	Dark Limed Oak	11.0	Expona Flow Infinity PUR	9864	Autumn Rain	24.2
Expona Design Wood PUR	6185	White Oak	49.1	Expona Commercial Wood PUR	4084	Brown Limed Oak	13.2	Expona Flow Infinity PUR	9865	Night Sky	12.5
Expona Design Wood PUR	6204	Grey Heritage Cherry	10.0	Expona Commercial Wood PUR	4085	Light Classic Oak	33.1	Expona Flow Infinity PUR	9866	Raven	11.8
Expona Design Wood PUR	6222	Amber Classic Oak	17.9	Expona Commercial Wood PUR	4086	Honey Classic Oak	23.0	Expona Flow Infinity PUR	9867	Espresso	10.2
Expona Design Stone PUR	7153	Black Slate	9.2	Expona Commercial Wood PUR	4088	Dark Classic Oak	15.9	Expona Flow Infinity PUR	9868	Firelight	16.3
Expona Design Stone PUR	7154	Atlantic Slate	13.1	Expona Commercial Wood PUR	4091	Vintage Timber	16.7	Expona Flow Infinity PUR	9869	Honey Beige	29.2
Expona Design Stone PUR	7155	Silver Slate	24.4								
Expona Design Stone PUR	7173	Classic Limestone	60.3								
Expona Design Stone PUR	7214	Light Contour	39.8								
Expona Design Stone PUR	7215	Dark Contour	10	Expona Control Wood PUR	6500	American Oak	31.2	Expona SimPlay Wood PUR	2500	Rich Oak	14.8
Expona Design Stone PUR	7219	Roman Limestone	31.1	Expona Control Wood PUR	6501	Blond Country Plank	27.7	Expona SimPlay Wood PUR	2501	Light Cherry	25.7
Expona Design Stone PUR	7233	Warm Grey Concrete	22.8	Expona Control Wood PUR	6502	Nut Tree	29.5	Expona SimPlay Wood PUR	2502	Natural Oak	25.0
Expona Design Stone PUR	7237	Cool Grey Concrete	22.3	Expona Control Wood PUR	6503	Classic Oak	22.8	Expona SimPlay Wood PUR	2503	American Oak	34.4
Expona Design Stone PUR	7238	Dark Grey Concrete	13.9	Expona Control Wood PUR	6504	Weathered Country Plank	10.5	Expona SimPlay Wood PUR	2504	Rich Walnut	6.0
Expona Design Stone PUR	8076	Mocca Matrix	8.9	Expona Control Wood PUR	6505	White Oak	47.8				

# Light Reflectance Values

PRODUCT	SHADE NO	SHADE	LRV	PRODUCT	SHADE NO	SHADE	LRV	PRODUCT	SHADE NO	SHADE	LRV
Expona SimPlay Stone & Effect PUR	2566	Cold Grey Concrete	17.9	Pearlazzo PUR	9724	Wholemeal	30.8	Polysafe Arena PUR	5092	Clay Stone	24.7
Expona SimPlay Stone & Effect PUR	2567	Light Grey Concrete	34.0	Pearlazzo PUR	9725	Dark Berry	12.4	Polysafe Astral PUR	4050	Deep Sapphire	14.1
Expona SimPlay Stone & Effect PUR	2568	Warm Grey Concrete	22.8	Polyclad Pro PU	4092	Biscuit Beige	62.0	Polysafe Astral PUR	4080	Black Opal	8.8
Expona SimPlay Stone & Effect PUR	2569	Dark Grey Concrete	13.4	Polyclad Pro PU	4093	White Chalk	79.7	Polysafe Astral PUR	4190	Arkose	37.9
Finesse SD	5800	Cascade	38.1	Polyclad Pro PU	4094	Frosted Grey	64.8	Polysafe Astral PUR	4200	Nebula Blue	11.5
Finesse SD	5820	Daybreak	48.5	Polyclad Pro PU	4095	Grey Steel	56.0	Polysafe Astral PUR	4220	Aquarius	16.9
Finesse SD	5830	Lodestone	33.1	Polyclad Pro PU	4096	Dusted Blue	71.6	Polysafe Astral PUR	4230	Space Mauve	17.5
Finesse SD	5840	Woodglade	40.8	Polyclad Pro PU	4097	Blue Shingle	71.1	Polysafe Astral PUR	4240	Lunar Grey	11.7
Finesse SD	5860	Moonscape	54.7	Polyclad Plus PU	2700	Dove White	71.7	Polysafe Astral PUR	4300	Starburst	25.7
Forest fx PUR	2990	Oiled Oak	35.0	Polyclad Plus PU	2710	Nimbus Grey	70.2	Polysafe Astral PUR	4310	Red Sky	13.9
Forest fx PUR	3090	Vermont Maple	34.7	Polyclad Plus PU	2800	Frosted Cream	65.7	Polysafe Astral PUR	4370	North Star	51.6
Forest fx PUR	3100	Classic Oak	28.6	Polyclad Plus PU	2810	Spring Fern	62.2	Polysafe Astral PUR	4380	Isis	28.6
Forest fx PUR	3110	Stained Maple	12.0	Polyclad Plus PU	2830	Summer Sky	60.6	Polysafe Astral PUR	4440	Greenstone	25.9
Forest fx PUR	3120	French Walnut	17.0	Polyclad Plus PU	2840	Polar Ice	73.0	Polysafe Astral PUR	4460	Calcite Blue	23.4
Forest fx PUR	3150	Smoked Oak	14.0	Polyflex Plus	6010	Snowdrop	69.7	Polysafe Astral PUR	4620	Feldspar	35.4
Forest fx PUR	3230	Classic Walnut	14.2	Polyflex Plus	6040	Black Tulip	5.1	Polysafe Corona PUR	5470	Drystone	48.8
Forest fx PUR	3290	Warm Beech	37.5	Polyflex Plus	6060	Rich Cherry	37.1	Polysafe Corona PUR	5480	Mango	33.4
Forest fx PUR	3310	Rich Cherry	25.7	Polyflex Plus	6130	Pearl Grey	32.9	Polysafe Corona PUR	5490	Seawater	14.9
Forest fx PUR	3330	Rustic Oak	29.2	Polyflex Plus	6180	Walnut	11.2	Polysafe Corona PUR	5500	Barley	42.0
Forest fx PUR	3340	European Oak	21.0	Polyflex Plus	6300	Dark Brown	7.5	Polysafe Corona PUR	5510	Bluebell	23.3
Forest fx PUR	3360	Mahogany	10.1	Polyflex Plus	7010	Cotswold Green	29.9	Polysafe Corona PUR	5520	Tulip	20.1
Forest fx PUR	3380	American Oak	35.7	Polyflex Plus	7030	Pennine Fawn	38.2	Polysafe Corona PUR	5530	Otter	22.8
Forest fx PUR	3390	Brazilian Walnut	7.8	Polyflex Plus	7040	Brecon Green	32.3	Polysafe Corona PUR	5540	Grasshopper	37.0
Mystique PUR	3410	Grigio	25.6	Polyflex Plus	7060	Firth Grey	25.5	Polysafe Corona PUR	5550	Pacific	32.7
Mystique PUR	3440	Amra	47.7	Polyflex Plus	7080	Avon Sand	36.6	Polysafe Corona PUR	5560	Blackbird	11.1
Mystique PUR	3460	Corallo	28.7	Polyflex Plus	7100	Cambrian Bronze	26.0	Polysafe Corona PUR	5570	Seal	37.7
Mystique PUR	3480	Bianco	65.0	Polyflex Plus	7310	Mourne Grey	35.0	Polysafe Corona PUR	5580	Geyser	29.5
Mystique PUR	3500	Ametista	47.2	Polyflex Plus	7320	Lomond Grey	30.7	Polysafe Hydro	H 4770	Woodland Grey	27.5
Mystique PUR	3510	Azurite	11.5	Polyflex Plus	7330	Dover Grey	58.3	Polysafe Hydro	H 4800	Oystershell	34.4
Mystique PUR	3520	Celeste	41.1	Polyflex Plus	7340	Romney Green	44.5	Polysafe Hydro	H 4850	Blue Forge	9.2
Mystique PUR	3560	Beola	57.9	Polyflex Plus	7350	Lakeland Blue	25.6	Polysafe Hydro	H 4860	Bisque	45.6
Mystique PUR	3570	Azul	34.2	Polyflex Plus	7360	Mendip Mauve	46.8	Polysafe Hydro	H 4870	Marine	18.5
Mystique PUR	3580	Giallo	47.2	Polyflex Plus	7370	Cornish Cream	47.9	Polysafe Hydro	H 4930	White Stone	43.8
Mystique PUR	3600	Titanio	46.9	Polyflex Plus	7380	Anglian Red	20.1	Polysafe Hydro	H 4940	Tempered Steel	25.0
Mystique PUR	3620	Alpi	42.8	Polyflex Plus	7390	Wensley Beige	47.6	Polysafe Hydro	H 4960	Sheared Slate	26.2
OHMega EC	6002	Thunderstorm	46.3	Polyflex Plus	7400	Durham Fawn	46.7	Polysafe Hydro Evolve	4251	Indus	58.3
OHMega EC	6003	Warm Haze	65.4	Polyflex Plus	7410	Jersey Tan	33.9	Polysafe Hydro Evolve	4252	Amazon	59.3
OHMega EC	6004	Tempest	33.1	Polyflex Plus	7420	Arran Beige	58.4	Polysafe Hydro Evolve	4253	Colorado	44.2
OHMega EC	6005	Frosty Glen	65.3	Polyflor Conductive ROF	5980	Black	4.9	Polysafe Hydro Evolve	4254	Danube	42.2
OHMega EC	6006	Morning Dew	52.5	Polyflor Sport	7512	Blue	15.0	Polysafe Hydro Evolve	4255	Black Volta	6.4
Pearlazzo PUR	9701	Wild Flax	56.3	Polyflor Sport	7515	Green	18.0	Polysafe Hydro Evolve	4256	Blue Nile	33.7
Pearlazzo PUR	9702	Lemon Ice	54.5	Polyflor Sport	7516	Maple	36.9	Polysafe Hydro Evolve	4257	Tigris	27.7
Pearlazzo PUR	9703	Chalk Burst	63.5	Polysafe Apex	4201	Green Quartz	24.0	Polysafe Hydro Evolve	4258	Adriatic	27.2
Pearlazzo PUR	9704	Mineral	43.2	Polysafe Apex	4202	Chromite	15.1	Polysafe Modena PUR	4042	Grey Fluorite	47.5
Pearlazzo PUR	9705	Charcoal	9.8	Polysafe Apex	4203	Biotite	6.1	Polysafe Modena PUR	4043	Agate Grey	38.3
Pearlazzo PUR	9706	Mint Crisp	44.5	Polysafe Apex	4204	Breccia	17.8	Polysafe Modena PUR	4044	Gypsum	49.5
Pearlazzo PUR	9707	Satin Jade	20.8	Polysafe Apex	4205	Siltstone	22.6	Polysafe Modena PUR	4045	Jetstone	14.7
Pearlazzo PUR	9708	Alpine Meadow	40.0	Polysafe Apex	4206	Red Ochre	12.8	Polysafe Modena PUR	4046	Copal	39.4
Pearlazzo PUR	9709	Skylight	43.1	Polysafe Arena PUR	5081	Linen	45.6	Polysafe Modena PUR	4047	Galena	27.2
Pearlazzo PUR	9710	Seafoam	43.2	Polysafe Arena PUR	5082	Steelwool	21.9	Polysafe Modena PUR	4048	Citrina	44.4
Pearlazzo PUR	9711	Atlantic Mist	25.7	Polysafe Arena PUR	5083	Chambrey	33.5	Polysafe Modena PUR	4049	Andesite	26.4
Pearlazzo PUR	9712	Sandcastle	46.6	Polysafe Arena PUR	5084	Frosted Silver	63.2	Polysafe Modena PUR	4051	Angelite	40.0
Pearlazzo PUR	9713	Truffle	32.2	Polysafe Arena PUR	5085	Sand Grain	45.3	Polysafe Modena PUR	4052	Green Tourmaline	17.3
Pearlazzo PUR	9715	Lilac Bloom	30.2	Polysafe Arena PUR	5086	Brushed Titanium	13.7	Polysafe Modena PUR	4053	Orange Calcite	23.8
Pearlazzo PUR	9716	Toasted Almond	50.6	Polysafe Arena PUR	5087	Light Concrete	33.3	Polysafe Modena PUR	4054	Blue Quartz	16.9
Pearlazzo PUR	9717	Autumn Fire	24.1	Polysafe Arena PUR	5088	Cement	41.9	Polysafe Modena PUR	4055	Aventurine	44.9
Pearlazzo PUR	9718	Rain Cloud	34.2	Polysafe Arena PUR	5089	Dark Concrete	23.2	Polysafe Modena PUR	4056	Garnet	14.7
Pearlazzo PUR	9719	Sailcloth	50.5	Polysafe Arena PUR	5090	Crema Nova	53.6	Polysafe Mosaic PUR	4105	Grey Fusion	38.5
Pearlazzo PUR	9720	Ocean Ripple	13.1	Polysafe Arena PUR	5091	Flagstone Grey	35.0	Polysafe Mosaic PUR	4115	Pearlite	54.6
Pearlazzo PUR	9721	Sunrise	47.6	Polysafe Mosaic PUR	4125	Akoya	41.1	Polysafe Mosaic PUR	4135	Orient Grey	22.5
Pearlazzo PUR	9722	Purple Crush	14.2	Polysafe Mosaic PUR	4135	Orient Grey	22.5				
Pearlazzo PUR	9723	Caramel	39.3								

# Light Reflectance Values

PRODUCT	SHADE NO	SHADE	LRV	PRODUCT	SHADE NO	SHADE	LRV	PRODUCT	SHADE NO	SHADE	LRV
Polysafe Mosaic PUR	4145	Freshwater	25.1	Polysafe Wood fx PUR	3107	Classic Oak	28.6	Saarfloor Noppe	707	Cool Blue	17.8
Polysafe Mosaic PUR	4155	Earthstone	38.7	Polysafe Wood fx PUR	3297	Warm Beech	35.2	SD	5030	Steel Grey	31.5
Polysafe Mosaic PUR	4165	Graphite Pearl	17.6	Polysafe Wood fx PUR	3337	Rustic Oak	25.8	SD	5050	Ocean Blue	41.4
Polysafe Mosaic PUR	4175	South Sea	18.9	Polysafe Wood fx PUR	3347	European Oak	23.3	SD	5060	Flaxen	60.3
Polysafe Mosaic PUR	4185	Sunstone	24.2	Polysafe Wood fx PUR	3357	Silver Oak	22.9	SD	5070	Golden Sand	42.9
Polysafe Mosaic PUR	4195	Green Opal	34.4	Polysafe Wood fx PUR	3387	American Oak	37.2	SD	5080	Teal	29.8
Polysafe Standard PUR	4020	Silver Birch	26.7	Polysafe Wood fx PUR	3371	Nero Oak	7.3	SD	5100	Silver Grey	48.6
Polysafe Standard PUR	4030	Maple Fawn	27.3	Polysafe Wood fx PUR	3372	Sun Bleached Oak	31.4				
Polysafe Standard PUR	4040	Redwood	12.1	Polysafe Wood fx PUR	3373	Aged Oak	8.8	Secura PUR	210	Yorkstone	47.7
Polysafe Standard PUR	4060	Cedar Blue	13.9	Polysafe Wood fx PUR	3374	Oiled Oak	36.9	Secura PUR	211	Limestone	54.5
Polysafe Standard PUR	4090	Nordic Grey	23.6	Polysafe Wood fx PUR	3375	Roasted Limed Ash	30.2	Secura PUR	212	Peakmoor Sandstone	56.6
Polysafe Standard PUR	4110	Alpine Green	27.1	Polysafe Wood fx PUR	3376	Tropical Pine	21.9	Secura PUR	213	Farmhouse Terracotta	20.0
Polysafe Standard PUR	4120	Antique Copper	17.8	Polysafe Wood fx Acoustix PUR	3292	Warm Beech	35.2	Secura PUR	214	Black Slate	8.0
Polysafe Standard PUR	4130	Arctic Blue	25.2	Polysafe Wood fx Acoustix PUR	3302	Cherry	29.4	Secura PUR	215	Riviera Sands	53.0
Polysafe Standard PUR	4140	Autumn Beige	38.9	Polysafe Wood fx Acoustix PUR	3332	Rustic Oak	25.8	Secura PUR	216	Riviera Taupe	58.2
Polysafe Standard PUR	4150	Black Walnut	6.3	Polysafe Wood fx Acoustix PUR	3342	European Oak	23.3	Secura PUR	217	Riviera Bluebell	44.7
Polysafe Standard PUR	4490	Twilight	9.8	Polysafe Wood fx Acoustix PUR	3352	Silver Oak	22.9	Secura PUR	218	Polished Concrete	22.9
Polysafe Standard PUR	4520	Elmwood	38.8	Polysafe Wood fx Acoustix PUR	3362	Mahogany	10.8	Secura PUR	219	Grey Flagstone	14.4
Polysafe Standard PUR	4540	Ash Grey	36.9	Polysafe Wood fx Acoustix PUR	3382	American Oak	37.2	Secura PUR	2120	Linear Ivory	67.4
Polysafe Standard PUR	4560	Storm Blue	15.3	Polysafe Wood fx Acoustix PUR	3992	Brazilian Walnut	8.3	Secura PUR	2121	Linear Fawn	46.6
Polysafe Standard PUR	4570	Cool Aqua	34.9	Prestige PUR	1600	Alabaster	59.4	Secura PUR	2122	Linear Charcoal	13.8
Polysafe Standard PUR	4580	Lilac Blue	22.8	Prestige PUR	1800	Pale Iris	39.3	Secura PUR	2123	Alabaster Elm	53.0
Polysafe Ultima	4290	Aurora Grey	14.6	Prestige PUR	1830	Clove	31.8	Secura PUR	2124	Aspen	62.3
Polysafe Ultima	4330	Pearl Granite	18.7	Prestige PUR	1840	Stone Blue	30.3	Secura PUR	2125	Norwegian Maple	33.1
Polysafe Ultima	4340	Iron Ore	12.4	Prestige PUR	1850	Cinnamon	51.0	Secura PUR	2126	Natural Oak	31.9
Polysafe Ultima	4350	Baltic Green	22.6	Prestige PUR	1860	Gingerlily	49.2	Secura PUR	2127	Blond Oak	42.3
Polysafe Ultima	4360	Mortar	22.9	Prestige PUR	1870	Peppermint	43.5	Secura PUR	2128	Golden Oak	36.5
Polysafe Ultima	4390	Bluestone	14.2	Prestige PUR	1880	Chive	48.4	Secura PUR	2129	Antique Herringbone	20.2
Polysafe Verona PUR	5201	Cookie Cream	64.0	Prestige PUR	1890	Thyme	58.6	Secura PUR	2130	Country Oak	20.0
Polysafe Verona PUR	5202	Rainstorm	44.4	Prestige PUR	1900	Bilberry	23.3	Secura PUR	2131	Antique Oak	7.7
Polysafe Verona PUR	5203	Dolphin Grey	25.8	Prestige PUR	1910	Nutmeg	58.9	Secura PUR	2132	Sweet Chestnut	15.6
Polysafe Verona PUR	5204	Café Noir	11.2	Prestige PUR	1920	Lavender Mist	52.4	Secura PUR	2133	Black Walnut	10.7
Polysafe Verona PUR	5205	Skyline	47.0	Prestige PUR	1930	Grey Marl	40.5	Secura PUR	2134	African Mahogany	8.5
Polysafe Verona PUR	5206	Blue Lagoon	31.9	Prestige PUR	1940	Liquorice	9.3	Secura PUR	2135	Ebony	12.1
Polysafe Verona PUR	5207	Nightfall	12.3	Prestige PUR	1950	Ice Crystal	56.9	Standard XL	8580	Black Cherry	8.8
Polysafe Verona PUR	5208	Horizon Blue	30.5	Prestige PUR	1960	Chilli	24.5	Standard XL	8640	Black Panther	5.5
Polysafe Verona PUR	5209	Freshmint	51.7	Saarfloor Diamant	203	Rice	29.1	Standard XL	9100	Mushroom	39.7
Polysafe Verona PUR	5210	Oregano	48.3	Saarfloor Diamant	205	Mocha	18.6	Standard XL	9120	Graphite	27.5
Polysafe Verona PUR	5211	Seagrass	25.2	Saarfloor Diamant	206	Almond	47.4	Standard XL	9170	Atlantic Blue	23.4
Polysafe Verona PUR	5212	Biscotti	44.7	Saarfloor Diamant	210	Molasses	15.1	Standard XL	9200	Slate Grey	31.8
Polysafe Verona PUR	5213	Caramel Latte	33.6	Saarfloor Diamant	213	Sea Salt	39.5	XL PU	3700	Pumice	53.9
Polysafe Verona PUR	5214	Marshmallow	44.9	Saarfloor Diamant	306	Pepper	47.6	XL PU	3710	Fossil	40.5
Polysafe Verona PUR	5215	Chocolate Chip	15.8	Saarfloor Diamant	307	Raisin	31.0	XL PU	3720	Flint	25.4</

# Product Specification

	PEARLAZZO PUR	PRESTIGE PUR	MYSTIQUE PUR	CLASSIC MYSTIQUE PUR	2000 PUR
Gauge	2mm	2mm	2mm	2mm	2mm, 2.5mm
Wear Layer	2mm	2mm	2mm	2mm	2mm
Roll Size	2m x 20m = 40m <sup>2</sup>	2m x 20m = 40m <sup>2</sup>	2m x 20m = 40m <sup>2</sup>	2m x 20m = 40m <sup>2</sup>	2m x 20m = 40m <sup>2</sup> 2m x 15m = 30m <sup>2</sup>
Tile Size	-	300 x 300mm 608 x 608mm	300 x 300mm 608 x 608mm	300 x 300mm 608 x 608mm	300 x 300mm 608 x 608mm*
Weight	2950g/m <sup>2</sup>	2950g/m <sup>2</sup>	3250g/m <sup>2</sup>	3250g/m <sup>2</sup>	2mm: 3550g/m <sup>2</sup> 2.5mm: 4552g/m <sup>2</sup>
EN 649 / EN ISO 10581	Conforms	Conforms	Conforms	Conforms	Conforms
Use Area Classification	23, 34, 43	23, 34, 43	23, 34, 43	23, 34, 43	23, 34, 43
Agrément	✓	✓	✓	✓	-
ASTM F1913	Conforms	Conforms	Conforms	Conforms	Conforms
ASTM F1700	-	Conforms	Conforms	Conforms	Conforms
EN 13501-1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1
EN ISO 9239-1	≥8kw/m <sup>2</sup>	≥8kw/m <sup>2</sup>	≥8kw/m <sup>2</sup>	≥8kw/m <sup>2</sup>	≥8kw/m <sup>2</sup>
EN ISO 11925-2	Pass	Pass	Pass	Pass	Pass
ASTM E662	<450	<450	<450	<450	<450
ASTM E648	Class 1	Class 1	Class 1	Class 1	Class 1*
EN 660-2 Abrasion Group EN ISO 10581	Group T Type I	Group T Type I	Group P Type I	Group P Type I	Group M Type II
EN 13893	Class DS (dry)	Class DS (dry)	Class DS (dry)	Class DS (dry)	Class DS (dry)
Indoor Air Comfort Gold	Approved	Approved	Approved	Approved	Approved
FloorScore	Certified product	Certified product	Certified product	Certified product	Certified product
AgBB	Pass	Pass	Pass	Pass	Pass
BRE Green Guide	A+ rating	A+ rating	A+ rating	A+ rating	A+ rating
Hygiene	+	+	+	+	+
Maintenance Enhancement	Polyurethane reinforcement	Polyurethane reinforcement	Polyurethane reinforcement	Polyurethane reinforcement	Polyurethane reinforcement

• Tile size available in selected gauges - see tile availability table for more details.

\* Certification available for 2mm only.

+

All Polyflor commercial sheet vinyl ranges provide a continuous, impervious and hygienic flooring solution which can be confidently cleaned in accordance with recommended maintenance procedures and approved maintenance products. The implementation of an effective cleaning regime is the most important defence against infection.



Tile availability and coverage	Tile size	Coverage	Tiles per box
Prestige PUR, Mystique PUR, Classic Mystique PUR, 2000 PUR 2mm, XL PU 2mm, Standard XL 2mm, Polyflor SD, Finesse SD, Polyflor EC	608 x 608mm	5.17m <sup>2</sup>	14
Prestige PUR, Mystique PUR, Classic Mystique PUR, 2000 PUR 2mm, XL PU 2mm, Standard XL 2mm, Polyflex Plus PU 1.5/2.0mm	300 x 300mm	4.5m <sup>2</sup>	50
2000 PUR 2.5mm, Polyflex Plus PU 2.5mm	300 x 300mm	3.6m <sup>2</sup>	40
Noppe Stud Tile 3mm	500 x 500mm	5m <sup>2</sup>	20
Noppe Stud Tile 4mm	500 x 500mm	4m <sup>2</sup>	16

# Product Specification

	XL PU	STANDARD XL	POLYFLEX PLUS
Gauge	1.5mm, 2mm	1.5mm, 2mm 2.5mm, 3mm	1.5mm, 2mm, 2.5mm
Roll Size	2m x 27.5m = 55m <sup>2</sup> 2m x 20m = 40m <sup>2</sup>	2m x 27.5m = 55m <sup>2</sup> 2m x 20m = 40m <sup>2</sup> 2m x 15m = 30m <sup>2</sup> 2m x 13m = 26m <sup>2</sup>	-
Tile Size	300 x 300mm* 608 x 608mm*	300 x 300mm* 608 x 608mm*	300 x 300mm
Weight	1.5mm: 2360g/m <sup>2</sup> 2mm: 3200g/m <sup>2</sup>	1.5mm: 2360g/m <sup>2</sup> 2mm: 3200g/m <sup>2</sup> 2.5mm: 4200g/m <sup>2</sup> 3mm: 5010g/m <sup>2</sup>	1.5mm: 2800g/m <sup>2</sup> 2mm: 3800g/m <sup>2</sup> 2.5mm: 4860g/m <sup>2</sup>
EN 649 / EN ISO 10581	Conforms	Conforms	Conforms*
Use Area Classification	1.5mm: 23, 32, 41 2mm: 23, 34, 43	1.5mm: 23, 32, 41 2mm: 23, 34, 43 2.5mm: 23, 34, 43 3mm: 23, 34, 43	1.5mm: 23, 31 2mm: 23, 33, 42 2.5mm: 23, 34, 43
ASTM F1913	Conforms	Conforms	-
ASTM F1700	Conforms	Conforms	-
EN 13501-1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1
EN ISO 9239-1	≥8kw/m <sup>2</sup>	≥8kw/m <sup>2</sup>	≥8kw/m <sup>2</sup>
EN ISO 11925-2	Pass	Pass	Pass
ASTM E662	<450	<450†	-
ASTM E648	Class 1	Class 1†	Class 1
EN 660-2 Abrasion Group EN ISO 10581	Group M Type II	Group M Type II	Group F Type III
EN 13893	Class DS (dry)	Class DS (dry)	Class DS (dry)
Indoor Air Comfort Gold	Approved	Approved	-
FloorScore	Certified product	Certified product	-
AgBB	Pass	Pass	-
BRE Green Guide	A+ rating	A+ rating	A+ Generic
Hygiene	+	+	-
Maintenance	Polyurethane surface treatment	-	Polyurethane surface treatment

† Certification available for 1.5mm and 2mm only.

• Tile size available in selected gauges - see tile availability table for more details.

\* 40mm mandrel.

+

All Polyflor commercial sheet vinyl ranges provide a continuous, impervious and hygienic flooring solution which can be confidently cleaned in accordance with recommended maintenance procedures and approved maintenance products. The implementation of an effective cleaning regime is the most important defence against infection.



# Product Specification

POLYSAFE	VERONA PUR	CORONA PUR	ASTRAL PUR	MOSAIC PUR	MODENA PUR	ARENA PUR	WOOD FX PUR	VOGUE ULTRA PUR
Gauge	2mm	2mm	2mm	2mm	2mm	2mm	2mm	2mm
Wear Layer	-	-	-	0.7mm	0.7mm	0.7mm	0.7mm	-
Roll Size	2m x 20m = 40m <sup>2</sup>	2m x 20m = 40m <sup>2</sup>	2m x 20m = 40m <sup>2</sup>	2m x 20m = 40m <sup>2</sup>	2m x 20m = 40m <sup>2</sup>	2m x 20m = 40m <sup>2</sup>	2m x 20m = 40m <sup>2</sup>	2m x 20m = 40m <sup>2</sup>
Weight	2600g/m <sup>2</sup>	2400g/m <sup>2</sup>	2450g/m <sup>2</sup>	2400g/m <sup>2</sup>	2780g/m <sup>2</sup>	2780g/m <sup>2</sup>	2780g/m <sup>2</sup>	2400g/m <sup>2</sup>
EN 13845	Conforms	Conforms	Conforms	Conforms	Conforms	Conforms	Conforms	Conforms
CE Marking	DA0063	DA0010	DA0009	DA0035	DA0053	DA0053	DA0053	DA0005
Use Area Classification	23, 34, 43	23, 34, 43	23, 34, 43	23, 34, 43	23, 34, 43	23, 34, 43	23, 34, 43	23, 34, 43
Agrément	✓	✓	✓	✓	✓	✓	✓	✓
ASTM F1303	Conforms	Conforms	Conforms	Conforms	Conforms	Conforms	Conforms	Conforms
EN 13501-1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1
EN ISO 9239-1	≥8kw/m <sup>2</sup>	≥8kw/m <sup>2</sup>	≥8kw/m <sup>2</sup>	≥8kw/m <sup>2</sup>	≥8kw/m <sup>2</sup>	≥8kw/m <sup>2</sup>	≥8kw/m <sup>2</sup>	≥8kw/m <sup>2</sup>
EN ISO 11925-2	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass
ASTM E648	Class 1	Class 1	Class 1	Class 1	Class 1	Class 1	Class 1	Class 1
EN 13845 Abrasion Resistance	50,000 cycles	50,000 cycles	50,000 cycles	50,000 cycles	50,000 cycles	50,000 cycles	50,000 cycles	50,000 cycles
RRL Pendulum Test	≥36 (wet test)•	≥36 (wet test)•	≥36 (wet test)•	≥36 (wet test)•	≥36 (wet test)•	≥36 (wet test)•	≥36 (wet test)•	≥36 (wet test)•
Surface Roughness Rz	≥20µm	≥20µm	≥20µm	≥20µm	≥20µm	≥20µm	≥20µm	≥20µm
AS/NZS 4586	R10	R10	R10	R10	R10	R10	R10	R10
Indoor Air Comfort Gold	-	-	-	-	Approved	Approved	Approved	-
FloorScore	Certified product	Certified product	Certified product	Certified product	Certified product	Certified product	Certified product	Certified product
AgBB	Pass	Pass	Pass	Pass	Pass	Pass	Pass	Pass
BRE Green Guide	A+	A+	A+	A+	A+	A+	A+	A+
Hygiene	+	+	+	+	+	+	+	+
Maintenance Enhancement	Polysafe™ PUR	Polysafe™ PUR	Polysafe™ PUR	Polysafe™ PUR	Polysafe™ PUR	Polysafe™ PUR	Polysafe™ PUR	Polysafe™ PUR

• 4S Rubber/Slider 96. ▲ TRL/Slider 55.

+

All Polyflor commercial sheet vinyl ranges provide a continuous, impervious and hygienic flooring solution which can be confidently cleaned in accordance with recommended maintenance procedures and approved maintenance products. The implementation of an effective cleaning regime is the most important defence against infection.



# Product Specification

POLYSAFE	STANDARD PUR	HYDRO	HYDRO EVOLVE	ULTIMA	WOOD FX ACOUSTIX PUR	ECOMAX	APEX
Gauge	2mm, 2.5mm, 3.5mm	2mm	2mm	2.5mm	3.7mm	2mm	2.5mm
Wear Layer	-	-	-	-	0.65mm	-	-
Roll Size	2m x 20m = 40m <sup>2</sup> 2m x 15m = 30m <sup>2</sup> *	2m x 20m = 40m <sup>2</sup>	2m x 20m = 40m <sup>2</sup>	2m x 20m = 40m <sup>2</sup>	2m x 20m = 40m <sup>2</sup>	2m x 20m = 40m <sup>2</sup>	2m x 20m = 40m <sup>2</sup>
Weight	2mm: 2430g/m <sup>2</sup> 2.5mm: 3100g/m <sup>2</sup> 3.5mm: 4400g/m <sup>2</sup>	2700g/m <sup>2</sup>	2650g/m <sup>2</sup>	3000g/m <sup>2</sup>	2670g/m <sup>2</sup>	3350g/m <sup>2</sup>	3150g/m <sup>2</sup>
EN 13845	Conforms	Conforms	Conforms	Conforms	-	Conforms	Conforms
EN 651	-	-	-	-	Conforms	-	-
CE Marking	DA0003	DA0006	DA0052	DA0007	DA0054	-	DA0064
Use Area Classification	23, 34, 43	23, 34, 43	23, 34, 43	23, 34, 43	23, 34, 42	23, 34, 43	23, 34, 43
Agrément	✓	✓	✓	✓	✓	✓	-
ASTM F1303	Conforms	Conforms	Conforms	Conforms	-	Conforms	Conforms
EN 13501-1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1
EN ISO 9239-1	≥8kw/m <sup>2</sup>	≥8kw/m <sup>2</sup>	≥8kw/m <sup>2</sup>	≥8kw/m <sup>2</sup>	≥8kw/m <sup>2</sup>	≥8kw/m <sup>2</sup>	≥8kw/m <sup>2</sup>
EN ISO 11925-2	Pass	Pass	Pass	Pass	Pass	Pass	Pass
ASTM E648	Class 1	Class 1	Class 1	Class 1	-	Class 1	Class 1
EN 13845 Abrasion Resistance	50,000 cycles	50,000 cycles	50,000 cycles	50,000 cycles	50,000 cycles	50,000 cycles	50,000 cycles
EN ISO 10140-3 (EN ISO 140-8)	-	-	-	-	≥19dB	-	-
RRL Pendulum Test	≥36 (wet test)•	≥36 (wet test)▲*	≥36 (wet test)▲*	≥40 (wet test)• ≥36 (wet test)▲	≥36 (wet test)•	≥36 (wet test)•	≥45 (wet test)•
Surface Roughness Rz	≥20µm	≥20µm	≥20µm	≥70µm	≥20µm	≥20µm	≥70µm
AS/NZS 4586	R10	Class B	Class B	R11	R10	R10	R12
Indoor Air Comfort Gold	-	-	-	-	Approved	Approved	-
FloorScore	Certified product	Certified product	Certified product	Certified product	Certified product	Certified product	Certified product
AgBB	Pass	Pass	Pass	Pass	Pass	Pass	Pass
BRE Green Guide	A+	A+	A+	A+	A+	A+	A+
Hygiene	+	+	+	+	+	+	+
Maintenance Enhancement	Polysafe™ PUR	-	-	-	Polysafe™ PUR	-	-

\* 3.5mm gauge.

• 4S Rubber/Slider 96. ▲ TRL/Slider 55.

+

All Polyflor commercial sheet vinyl ranges provide a continuous, impervious and hygienic flooring solution which can be confidently cleaned in accordance with recommended maintenance procedures and approved maintenance products. The implementation of an effective cleaning regime is the most important defence against infection.



# Product Specification

	FOREST FX PUR	ACOUSTIX FOREST FX PUR	ACOUSTIX GALLERY FX PUR	SECURA PUR	DESIGNATEX PUR	EXPONA FLOW PUR
Gauge	2mm	3.7mm	3.7mm	3.0mm	3.0mm	2mm
Wear Layer	0.7mm	0.65mm	0.6mm	0.35mm	0.3mm	0.7mm
Roll Size	2m x 20m = 40m <sup>2</sup>	2m x 20m = 40m <sup>2</sup>	2m x 20m = 40m <sup>2</sup>	2m x 25m = 50m <sup>2</sup> 3m x 25m = 75m <sup>2</sup> 4m x 25m = 100m <sup>2</sup>	2m x 25m = 50m <sup>2</sup> 3m x 25m = 75m <sup>2</sup> 4m x 25m = 100m <sup>2</sup>	2m x 20m = 40m <sup>2</sup>
Weight	2700g/m <sup>2</sup>	2800g/m <sup>2</sup>	2550g/m <sup>2</sup>	1780g/m <sup>2</sup>	1700g/m <sup>2</sup>	2700g/m <sup>2</sup>
EN 649 / EN ISO 10582	Conforms	-	-	-	-	Conforms
EN 651	-	Conforms	Conforms	-	-	-
EN 653 / EN ISO 26986	-	-	-	Conforms	Conforms	-
Use Area Classification	23, 34, 43	23, 34, 42	23, 33, 42	23, 32, 41	23, 31	23, 34, 43
EN 13501-1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1
EN ISO 9239-1	≥8kw/m <sup>2</sup>	≥8kw/m <sup>2</sup>	≥8kw/m <sup>2</sup>	≥8kw/m <sup>2</sup>	≥8kw/m <sup>2</sup>	≥8kw/m <sup>2</sup>
EN ISO 11925-2	Pass	Pass	Pass	Pass	Pass	Pass
EN 649 / EN ISO 10582 Abrasion Group	Group T / Type I	-	-	Group T / Type I	-	Group T / Type I
EN 651 Abrasion Group	-	Group T / Type I	Group T / Type I	-	-	-
EN 653 / EN ISO 26986 Abrasion Group	-	-	-	-	Group T / Type I	-
EN ISO 10140-3 (EN ISO 140-8)	-	≥19dB	≥19dB	≥19dB	≥17dB	-
EN 433 Residual Indentation	<0.10mm	<0.2mm	<0.2mm	<0.2mm	<0.35mm	<0.10mm
EN 13893	Class DS (dry)	Class DS (dry)	Class DS (dry)	Class DS (dry)	Class DS (dry)	Class DS (dry)
DIN 51130	R10	R10	R10	R10	R10	R10
AS/NZS 4586	R10	R10	-	R10	-	R10
Indoor Air Comfort Gold	Approved	Approved	Approved	Approved	Approved	Approved
FloorScore	Certified product	Certified product	Certified product	Certified product	Certified product	Certified product
AgBB	Very low emissions	Very low emissions	Very low emissions	Very low emissions	Very low emissions	Very low emissions
Hygiene	+	+	+	+	+	+
BRE Green Guide	A+	A+	A+	A+ Generic	A Generic	A+
Maintenance Enhancement	Polyurethane reinforcement	Polyurethane reinforcement	Polyurethane reinforcement	Polyurethane reinforcement	Polyurethane reinforcement	Polyurethane reinforcement

+ All Polyflor commercial sheet vinyl ranges provide a continuous, impervious and hygienic flooring solution which can be confidently cleaned in accordance with recommended maintenance procedures and approved maintenance products. The implementation of an effective cleaning regime is the most important defence against infection.



# Product Specification

	EXPONA DESIGN PUR	EXPONA COMMERCIAL PUR	EXPONA CONTROL PUR	EXPONA SIMPLAY PUR
Gauge	3mm	2.5mm	2.5mm	5mm
Wear Layer	0.7mm	0.55mm	0.7mm	0.7mm
Plank Size: Wood (planks per box)	152.4 x 914.4mm (24) 152.4 x 1219.2mm (18) 184.2 x 1219.2mm (15) 203.2 x 1219.2mm (14)	101.6 x 914.4mm (36) 152.4 x 914.4mm (24) 152.4 x 1219.2mm (18) 184.2 x 1219.2mm (15) 203.2 x 1219.2mm (14)	152.4 x 914.4mm (24)	177.8 x 1219.2mm (10) 185 x 1505mm (8)
Tile Size: Stone/Design (tiles per box)	304.8 x 609.6mm (18) 457.2 x 914.4mm (8) 304.8 x 914.4mm (12) 609.6 x 609.6mm (9)	304.8 x 609.6mm (18) 457.2 x 457.2mm (16) 304.8 x 914.4mm (12) 609.6 x 609.6mm (9)	304.8 x 609.6mm (18) 457.2 x 457.2mm (16)	457.2 x 457.2mm (12) 600 x 600mm (6)
Weight	5100g/m <sup>2</sup>	4290g/m <sup>2</sup>	4290g/m <sup>2</sup>	8000g/m <sup>2</sup>
EN 649 / EN ISO 10582	Conforms	Conforms	Conforms	Conforms
Use Area Classification	23, 34, 43	23, 33, 42	23, 34, 43	23, 34, 43
EN 13501-1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1
EN ISO 9239-1	≥8kw/m <sup>2</sup>	≥8kw/m <sup>2</sup>	≥8kw/m <sup>2</sup>	≥8kw/m <sup>2</sup>
EN ISO 11925-2	Pass	Pass	Pass	-
ASTM E662	-	-	<450	-
ASTM E648	Class 1	Class 1	Class 1	-
EN ISO 10582 Abrasion Group	Group T / Type I	Group T / Type I	Group T / Type I	Group T / Type I
EN 13893	Class DS (dry)	Class DS (dry)	Class ES (wet)	Class DS (dry)
RRL Pendulum Test	-	-	≥36 (wet test)	-
Surface Roughness Rz	-	-	≥20µm	-
DIN 51130	R10	R10	R10	R10
Maintenance Enhancement	Polyurethane reinforcement	Polyurethane reinforcement	Polyurethane reinforcement	Polyurethane reinforcement

	BEVEL LINE PUR	CAMARO PUR	CAMARO LOC PU	AFFINITY2 <sup>55</sup>	COLONIA PUR
Gauge	2.5mm	2mm	4mm	2mm	2mm
Wear Layer	0.7mm	0.3mm	0.3mm	0.55mm	0.2mm
Plank Size: Wood (planks per box)	101 x 914mm (36)	101.6 x 914.4mm (36) 152.4 x 914.4mm (24) 152.4 x 1219.2mm (18) 203.2 x 1219.2mm (14)	145.6 x 906.6mm (15) 177.4 x 1212.4mm (9)	184.2 x 1219.2 mm (15)	101.6 x 914.4mm (36) 152.4 x 914.4mm (24) 152.4 x 1219.2mm (18) 184.2 x 1219.2mm (15)
Tile Size: Stone/Design (tiles per box)	457 x 457mm (16)	304.8 x 304.8mm (36) 304.8 x 609.6mm (18) 457.2 x 457.2mm (16)	298 x 602.8mm (11)	-	304.8 x 304.8mm (36) 304.8 x 609.6mm (18) 457.2 x 457.2mm (16)
Weight	4290g/m <sup>2</sup>	3600g/m <sup>2</sup>	7025g/m <sup>2</sup>	3500g/m <sup>2</sup>	3680g/m <sup>2</sup>
EN 649 / EN ISO 10582	Conforms	Conforms	Conforms	Conforms	Conforms
Use Area Classification	23, 34, 43	23, 31	23, 31	23, 33, 42	22
EN 13501-1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1
EN ISO 9239-1	≥8kw/m <sup>2</sup>	≥8kw/m <sup>2</sup>	≥8kw/m <sup>2</sup>	≥8kw/m <sup>2</sup>	≥8kw/m <sup>2</sup>
ASTM E648	Class 1	-	-	-	-
EN 649 / EN ISO 10582 Abrasion Group	Group T / Type I	Group T / Type I	Group T / Type I	Group T / Type I	Group T / Type I
EN 13893	Class DS (dry)	Class DS (dry)	Class DS (dry)	Class DS (dry)	Class DS (dry)
DIN 51130	R10	R10	R10	R10	R10
Maintenance Enhancement	Polyurethane reinforcement	Polyurethane reinforcement	Polyurethane surface treatment	Polyurethane reinforcement	Polyurethane reinforcement



# Product Specification

POLYFLOR SPORT	
Gauge	6.7mm
Roll Size	2m x 18.5m = 37m <sup>2</sup>
Weight	Plain 4260g/m <sup>2</sup> Maple 4510g/m <sup>2</sup>
EN 14904	Conforms
EN 13501-1	Class CfI-S1
EN ISO 9239-1	≥4.5kw/m <sup>2</sup>
EN ISO 11925-2	Pass
EN 649 Abrasion Group	Group T
EN 13893	Class DS (dry)
Maintenance Enhancement	Polymer surface treatment

DIAMANT		NOPPE STUD TILE	
Gauge	2mm	3mm, 4mm	
Tile Size	-	500 x 500mm	
Roll Size	1.90m x 15m = 28.5m <sup>2</sup>	-	
Weight	3200g/m <sup>2</sup>	3mm: 4200g/m <sup>2</sup> 4mm: 5600g/m <sup>2</sup>	
EN 1817	Conforms	-	
EN 12199	-	Conforms	
Use Area Classification	23, 34, 42	3mm: 23, 32, 41 4mm: 23, 34, 43	
EN 13501-1	Class Bfl-S1	Class CfI-S1	
EN ISO 9239-1	≥8kw/m <sup>2</sup>	≥4.5kw/m <sup>2</sup>	
EN ISO 11925-2	Pass	Pass	
EN 13893	Class DS (dry)	Class DS (dry)	



	SD	Finesse SD	Polyflor EC	OHMega EC	Conductive ROF†
Gauge	2mm	2mm	2mm	2mm	2mm
Roll Size	2m x 20m = 40m <sup>2</sup>	2m x 20m = 40m <sup>2</sup>	2m x 20m = 40m <sup>2</sup>	2m x 20m = 40m <sup>2</sup>	2m x 20m = 40m <sup>2</sup>
Tile Size	608 x 608mm	608 x 608mm	608 x 608mm	-	-
Weight	3400g/m <sup>2</sup>	3030g/m <sup>2</sup>	3500g/m <sup>2</sup>	3060g/m <sup>2</sup>	3300g/m <sup>2</sup>
EN 649 / EN ISO 10581	Conforms	Conforms	Conforms	Conforms	Conforms
Use Area Classification	34, 43	34, 43	34, 43	34, 43	34, 43
Agrément	-	✓	-	-	-
ASTM F1913	Conforms	Conforms	Conforms	Conforms	Conforms
ASTM F1700	Conforms	Conforms	Conforms	-	Conforms
EN 13501-1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1	Class Bfl-S1
EN ISO 9239-1	≥8kw/m <sup>2</sup>	≥8kw/m <sup>2</sup>	≥8kw/m <sup>2</sup>	≥8kw/m <sup>2</sup>	≥8kw/m <sup>2</sup>
EN ISO 11925-2	Pass	Pass	Pass	Pass	Pass
ASTM E662	<450	<450	-	-	-
ASTM E648	Class 1	Class 1	Class 1	Class 1	Class 1
EN 649/EN ISO 10581 Abrasion Group	Group M / Type II	Group P / Type I	Group M / Type II	Group P / Type I	Group M / Type II
EN 13893	Class DS (dry)	Class DS (dry)	Class DS (dry)	Class DS (dry)	Class DS (dry)
IEC 61340-4-1 R <sub>6</sub>	1 x 10 <sup>6</sup> to 1 x 10 <sup>9</sup> ohms	1 x 10 <sup>6</sup> to 1 x 10 <sup>9</sup> ohms	5 x 10 <sup>4</sup> to 1 x 10 <sup>6</sup> ohms	1 x 10 <sup>4</sup> to 1 x 10 <sup>6</sup> ohms	-
IEC 613040-4-5	-	-	-	<20v	-
EN 1081 R <sub>1</sub> /R <sub>2</sub>	<10 <sup>9</sup> ohms	<10 <sup>9</sup> ohms	5 x 10 <sup>4</sup> to 1 x 10 <sup>6</sup> ohms	10 <sup>4</sup> to 1 x 10 <sup>6</sup> ohms	<5 x 10 <sup>4</sup> ohms
ESD S.7.1	1 x 10 <sup>6</sup> to 1 x 10 <sup>9</sup> ohms	1 x 10 <sup>6</sup> to 1 x 10 <sup>9</sup> ohms	5 x 10 <sup>4</sup> to 1 x 10 <sup>6</sup> ohms	2.5 x 10 <sup>4</sup> to 1 x 10 <sup>6</sup> ohms	-
BRE Green Guide	A+(Generic)	A+(Generic)	A+(Generic)	A+(Generic)	A+(Generic)
Hygiene	+	+	-	+	-

† Polyflor ROF flooring for explosive handling areas, no protection from short circuit on a 240/250 volt mains. All SD results require minimum 40% R.H.

+ All Polyflor commercial sheet vinyl ranges provide a continuous, impervious and hygienic flooring solution which can be confidently cleaned in accordance with recommended maintenance procedures and approved maintenance products. The implementation of an effective cleaning regime is the most important defence against infection.



# Product Specification

	POLYCLAD PRO PU	POLYCLAD PLUS PU
Gauge	1.25mm	2mm
Roll Size	1.83m x 30m = 54.9m <sup>2</sup>	2m x 20m = 40m <sup>2</sup>
Weight	1900g/m <sup>2</sup>	3530g/m <sup>2</sup>
BS 476: Part 6	-	(I)<12 (ii)<6*
BS 476: Part 7	-	Class 1*
EN 13501-1	B-s2-d0	B-s3-d0
Hygiene	+	+
Maintenance Enhancement	Polyurethane surface treatment	Polyurethane surface treatment

\* For details of how this result was achieved (eg. adhesive, plasterboard), contact Polyflor.

CE 1121	
Polyflor Ltd, PO Box 3, Radcliffe New Road, Whitefield, Manchester, M45 7NR, 13	
1121 CPR - KA0058	
EN 15102:2007+A1:2011 Heavy duty wallcoverings	
Reaction to fire class	B-s2-d0 on plasterboard attached with an acrylic based adhesive
Release of formaldehyde	None
Release of other dangerous substances: - of heavy metals and specific elements - of vinyl chloride monomer (VCM)	<10mg/Kg <0.2mg/Kg
Sound absorption	NPD
Thermal resistance	NPD

CE 1121	
Polyflor Ltd, PO Box 3, Radcliffe New Road, Whitefield, Manchester, M45 7NR, 13	
1121 CPR - KA0058	
EN 15102:2007+A1:2011 Heavy duty wallcoverings	
Reaction to fire class	B-s3-d0 on plasterboard attached with an acrylic based adhesive
Release of formaldehyde	None
Release of other dangerous substances: - of heavy metals and specific elements - of vinyl chloride monomer (VCM)	<10mg/Kg <0.2mg/Kg
Sound absorption	NPD
Thermal resistance	NPD



## ENVIRONMENTALLY PREFERABLE FLOORING

At Polyflor, we strive to be an environmentally and economically sustainable business, recycling and reducing waste wherever possible and being as carbon neutral as possible. Choosing Environmentally Preferable Flooring from Polyflor means zero compromise in choice and the function of the product.

### POLYFLOR'S SUSTAINABILITY CREDENTIALS

- BRE A+ rating certification (ENP 415, ENP 429 & ENP 472) on 25 key ranges within homogeneous, heterogeneous, LVT and safety flooring categories
- EN 15804 EPDs verified by third party IBU
- ISO 14001 accreditation since 2000
- BES 6001 certification achieving Very Good
- Member of the UK Green Building Council
- Fully support the Vinyl Plus commitment for 2020
- Active member of Epfloor and Recovinyl
- Co-founder and active member of Recofloor, the UK's leading vinyl flooring take-back scheme
- Vinyl flooring is 100% recyclable
- Polyflor flooring contains up to 40% recycled content
- 9,570 tonnes of post production waste recycled and 800 tonnes of post consumer waste recycled in 2013
- Reduction in dry waste of 82% in eleven years and 91% reduction in liquid waste when compared to 2000's figures
- Recycled water is 96% with just 4% coming from mains
- Passed international VOC emissions tests, including Indoor Air Comfort Gold, FloorScore, Afsset and AgBB. No negative contribution to indoor air quality
- Low odour compared to many other floorcoverings
- Up to 85% sustainable material
- Plasticisers used by Polyflor are not classified substances and do not need authorisation under REACH. A range of clean ortho-phthalates and non-phthalate alternatives used across Polyflor's vinyl collection
- REACH compliance - no formaldehyde, asbestos, lead, mercury, cadmium or hexavalent chromium
- 20-25 year life span means fewer replacements over the life of a building, therefore less manufacturing, energy & materials
- Energy consumption in manufacture reduced by over 46% in the last 13 years
- Carbon emissions reduced by 18,426 tonnes since 2000
- Our claims are independently audited, certified and documented



## BRE Global Certification - individual ratings

Independent certification reassures customers that products will perform as expected. Each of Polyflor's certificated products has undergone a life cycle analysis (LCA) which scrutinises the environmental performance for every stage of its life. Individual certification ensures accuracy of LCA data specific to the product and manufacturer.

The BRE Global ratings are A+ to E, with A+ being the best rating, having achieved the lowest ecopoints. Results are categorised by end use areas, as the environmental impact in each can vary. For instance, a product may achieve a lower rating for Domestic, with a lifespan of 10 years, compared to 25 years for Education due to earlier replacements through moving and trends. Polyflor's certified ratings are impressive, particularly in the key areas of health and education, where BREEAM ratings are linked to Government funding:

SAFETY	Certificate	Health	Education	Retail (fashion)	Retail (durability)	Office	Domestic
Polysafe Astral PUR	ENP472	A+	A+	A+	A+	A	A
Polysafe Mosaic PUR	ENP472	A+	A+	A+	A+	A	A
Polysafe Corona PUR	ENP472	A+	A+	A+	A+	A	A
Polysafe Vogue Ultra PUR	ENP472	A+	A+	A+	A+	A	A
Polysafe Standard PUR	ENP472	A+	A+	A+	A+	A	A
Polysafe Ecomax	ENP472	A+	A+	A+	A+	A	A
Polysafe Verona PUR	ENP472	A+	A+	A+	A+	A	A
Polysafe Modena PUR	ENP415	A+	A+	A+	A+	A	A
Polysafe Arena PUR	ENP415	A+	A+	A+	A+	A	A
Polysafe Wood fx PUR	ENP415	A+	A+	A+	A	B	B
Polysafe Wood fx Acoustix PUR	ENP415	A+	A+	A+	A	B	B
Polysafe Hydro	ENP472	A+	A+	A+	A+	A	A
Polysafe Hydro Evolve	ENP472	A+	A+	A+	A+	A	A
Polysafe Apex	ENP472	A+	A+	A+	A+	A	A
Polysafe Ultima	ENP472	A+	A+	A+	A+	A	A
<b>HOMOGENEOUS</b>							
Pearlazzo PUR	ENP472	A+	A+	A+	A+	A	A
2000 PUR	ENP472	A+	A+	A+	A+	A	A
Classic Mystique PUR	ENP472	A+	A+	A+	A+	A	A
Mystique PUR	ENP472	A+	A+	A+	A+	A	A
Prestige PUR	ENP472	A+	A+	A+	A+	A	A
Standard XL	ENP472	A+	A+	A+	A+	A	A
XL PU	ENP472	A+	A+	A+	A+	A	A
<b>HETEROGENEOUS</b>							
Expona Flow PUR	ENP415	A+	A+	A+	A+	A	A
Secura	ENP415	A+	A+	A+	A+	A	A
Forest fx PUR	ENP415	A+	A+	A+	A+	A	A
Acoustix Forest fx PUR	ENP415	A+	A+	A+	A	A	B
Acoustix Gallery fx PUR	ENP415	A+	A+	A+	A+	A	A
<b>LVT</b>							
Expona Commercial PUR	ENP429	A+	A+	A+	A+	A	B
Expona Design PUR	ENP429	A+	A+	A+	A	B	B
Bevel Line PUR	ENP429	A+	A+	A+	A	A	A
Camaro PUR	ENP429	*	*	A+	*	A	A
Colonia PUR	ENP429	*	*	*	*	*	A

\* Product not suitable for use area and has therefore not been rated for the particular use area.

## BES 6001

Many Polyflor products are BES 6001 certified achieving a 'very good' rating. BES 6001 is a framework standard for the responsible sourcing of construction products and sets out requirements under three main headings:

### • Organisational Management • Supply Chain Management • Environmental & Social Issues

To meet this standard and achieve a 'very good' rating, Polyflor has satisfied the compulsory sections as well as conforming to higher levels of compliance through seventeen principles of responsible sourcing, which include:

- Ethics
- Legal Compliance
- Management Systems
- Supply Chain Management
- Stakeholder Engagement
- Complaints & Prosecutions
- Health & Safety
- Fundamental Rights at Work
- Climate Change & Energy
- Resource Use
- Site Stewardship
- Water
- Waste Management
- Transport Impacts
- Employment & Skills
- Local Communities
- Contribution to the Built Environment

## Maximising BREEAM Credits with Polyflor

Polyflor helps maximise credits on a BREEAM assessment through:

- BRE A+ individually rated products
- BES 6001 certification
- Specifying the Recofloor vinyl flooring take-back scheme
- VOC certification and E1 formaldehyde free declaration

For more sustainability information request a copy of Polyflor's latest Sustainability Report, or visit [www.polyflor.com/sustainability](http://www.polyflor.com/sustainability).

# Flooring Collection



Homogeneous	2-3	Pearlazzo PUR	7	2000 PUR
	4	Prestige PUR	8	XL PU
	5	Mystique PUR	9	Standard XL
	6	Classic Mystique PUR		
Semi Flexible Tiles	10	Polyflex Plus PU		
	<b>Safety (Polysafe)</b>			
Heterogeneous	11	Corona PUR	21	Ultima
	12	Astral PUR	22	Hydro
	13	Mosaic PUR	23	Hydro Evolve
	14	Modena PUR	24	Wood fx Acoustix PUR
	15	Arena PUR	25	Apex
	16-17	Verona PUR	26	Ecomax
	18	NEW Wood fx PUR	44-45	Expona Control PUR
	19	Vogue Ultra PUR		
	20	Standard PUR		
	27	Forest fx PUR	30-31	Secura PUR
	28	Acoustix Forest fx PUR	32-33	NEW Designatex PUR
	29	Acoustix Gallery fx PUR	34-37	Expona Flow PUR
	Luxury Vinyl Tiles	38-41	Expona Commercial PUR	52-53
42-43		Expona Design PUR	54-55	Camaro LOC PU
44-45		Expona Control PUR	56-57	NEW Affinity 2 <sup>55</sup> PUR
46-49		NEW Expona Simplay	58	Colonia PUR
50-51		Bevel Line PUR		
54-55		Camaro LOC PU		
Vinyl Loc Tiles				
	46-49	NEW Expona Simplay PUR		
Loose Lay Tiles				
	59	SD Collection		
ESD	60	EC Collection		
Wall Cladding	61	Polyclad Pro PU		
	61	Polyclad Plus PU		
Sport	62	Polyflor Sport		
Rubber Flooring	63	Diamant		
	64	Noppe Stud Tile		
Flooring Accessories	65	Ejecta		
Product Specifications	66-77			
Acoustic	24	Wood fx Acoustix PUR	30-31	Secura PUR
	28	Acoustix Forest fx PUR	32-33	Designatex PUR
	29	Acoustix Gallery fx PUR		





## POLYFLOR™ INTERNATIONAL

### Australia

Polyflor Australia  
Tel: +61 3 9215 4400  
Tel: 1800 777 425  
E-mail: sales@polyflor.com.au

### Canada

Polyflor Canada Inc.  
Tel: +1 905 364 3000  
E-mail: sales@polyflor.ca

### China

Polyflor Hong Kong  
Tel: +(852) 2865 0101  
E-mail: info@polyflor.com.hk

### France

James Halstead France SAS  
Tel: +33 (0) 8 20 20 32 11  
E-mail: info@jhfrance.fr

### Germany

objectflor Art und Design Belags GmbH  
Tel: +49 (0) 2236 966 330  
E-mail: info@objectflor.de

### India

Polyflor India Pvt Ltd  
Tel: +91 22 4023 2485  
E-mail: info@polyflor.co.in

### Ireland

Polyflor Ireland  
Tel: +353 (1) 864 9304  
E-mail: salesireland@polyflor.com

### New Zealand

Polyflor New Zealand  
Tel: +64 9 269 1111  
Tel: 0800 765 935  
E-mail: sales@polyflor.co.nz

### Norway

Polyflor Nordic  
Tel: +47 23 00 84 00  
E-mail: firmapost@polyflor.no

### Poland

Polflor Sp. Z o.o.  
Tel: +48 (0) 61 820 3155  
E-mail: polyflor@polflor.com.pl

### Russia

Polyflor Contract Ltd  
Tel: +7 (812) 332 42 02  
E-mail: info@polyflor.ru

### South Africa

Poly Sales Africa (Pty.) Ltd  
Tel: +27 11 609 3500  
E-mail: info@polyflor.co.za

### Sweden

FalckDesign AB  
Tel: +46 (0) 300 15820  
E-mail: info@falckdesign.com

[www.polyflor.com](http://www.polyflor.com)



## POLYFLOR™ HEAD OFFICE

POLYFLOR LTD. PO BOX 3 RADCLIFFE NEW ROAD WHITEFIELD MANCHESTER M45 7NR UK

UK SALES DIRECT: +44 (0)161 767 1122

UK SAMPLE REQUESTS: +44 (0)161 767 2551

EXPORT SALES DIRECT: +44 (0)161 767 1913

UK FAX:

EXPORT FAX:

TECHNICAL SUPPORT: +44 (0)161 767 1912

+44 (0)161 767 1128

+44 (0)161 767 1166

RECEPTION: +44 (0)161 767 1111

E-MAIL: INFO@POLYFLOR.COM

WEBSITE: WWW.POLYFLOR.COM

